

MD1230B

Data Quality Analyzer




Versatile Applications

1. IP Network Equipment Evaluation

- (1) High-density Switch Performance Evaluation
- (2) Automated Switch Performance Measurement
- (3) Interoperability Verification
- (4) Physical Layer Measurement

2. Network System Verification

- (1) PON System Verification
- (2) IPTV Streaming Service Verification
- (3) Carrier Class Network Service Verification

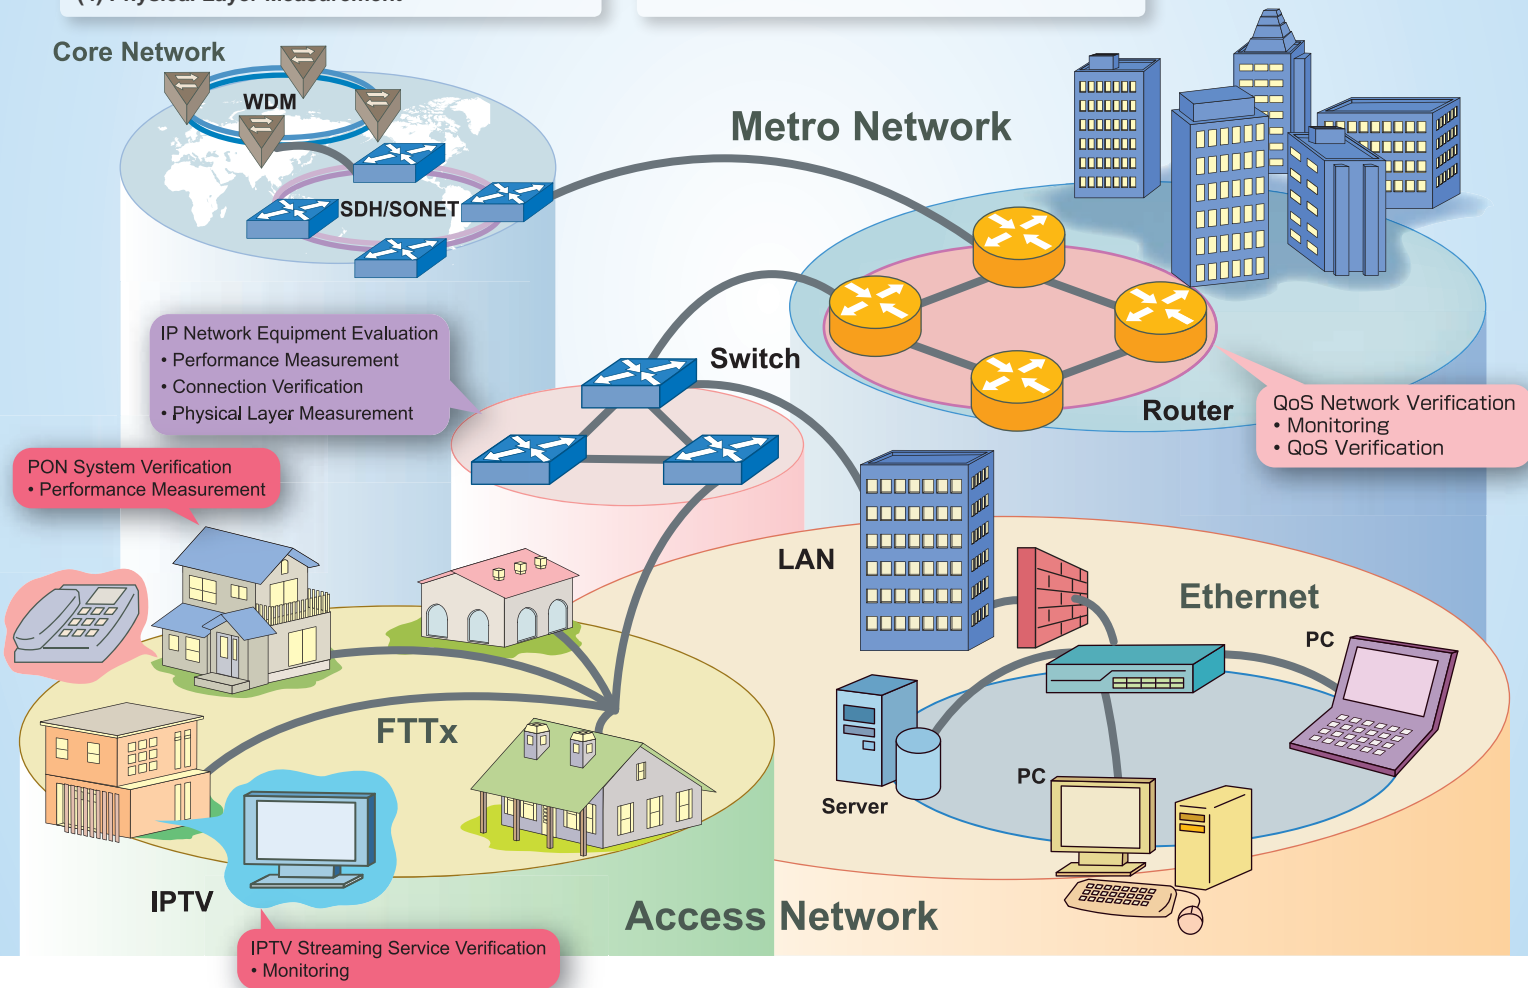

The MD1230B Data Quality Analyzer is a group of IP/Ethernet measuring instruments covering the increasingly active field of next-generation networks. The family supports the full range of access and metro network applications, including PON system verification, IP network equipment evaluation, network QoS verification, and IPTV streaming service verification. In addition, the products combine all the functions required for performance evaluation of IP network equipment and network systems in all-in-one platform, offering a high-efficiency measurement environment with integrated operations. The MD1230B is the Anritsu solution of choice for all your next-generation network measurement needs.

MD1230B

Data Quality Analyzer






Application Examples

IP Network Equipment Evaluation


High-Density Switch Performance Measurements

One MD1230B unit supports control and measurement of up to 60 ports, respectively. Therefore, all 48 ports of the highest-density 1U switch can be load-tested simultaneously, providing a small footprint, cost savings, and effective return on investment.

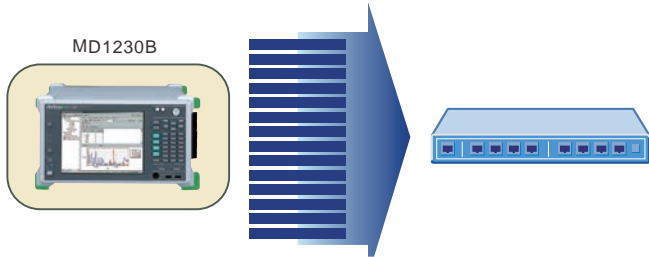

Automatic Switch Performance Measurement

One-button, IETF RFC2544 and RFC2889-compliant automatic performance testing [Option-10] supports automatic display of measurement results, shortening evaluation times and improving work efficiency.

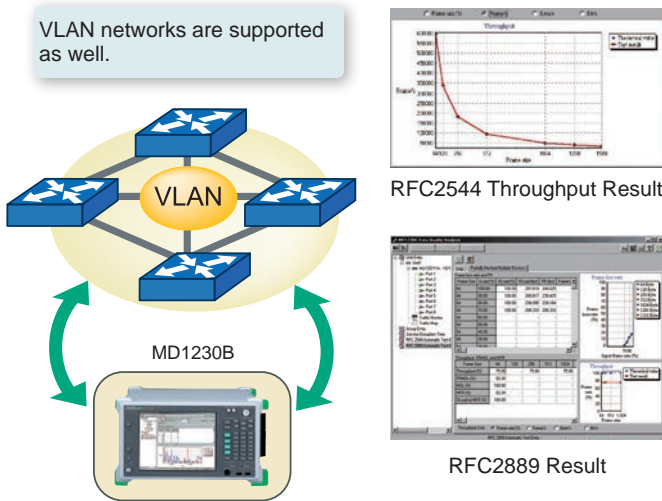

Connection Verification


The following functions make network configuration pre-verification interoperability checks and fault troubleshooting easier, while elimination of link faults improves network connection reliability.

<Link Test>

Repeatedly forcing the link on and off permits verification of equipment operation during a Link Flap situation.


<Auto Negotiation Analysis> [Option-15]

The auto negotiation connection status is easily analyzed using the Sequence Capture and Decode functions to improve the validity of interoperability test verification.

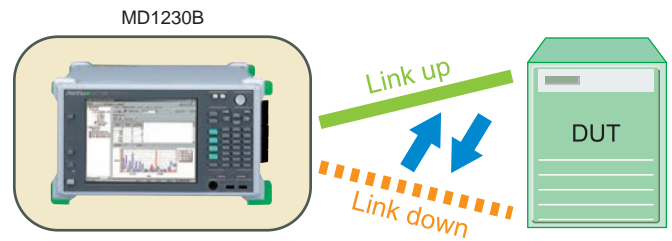

Physical Layer Measurements


Verification of signal transmission quality is key to improving network reliability. The variable measurement clock (± 100 ppm) and clock monitoring functions of the Clock Measurement Option [MU120131A/132A/138A-01], as well as the error insertion and error measurement functions of the BER Measurement Option [Option-11], support this verification to assure high-reliability operation at the equipment physical layer.

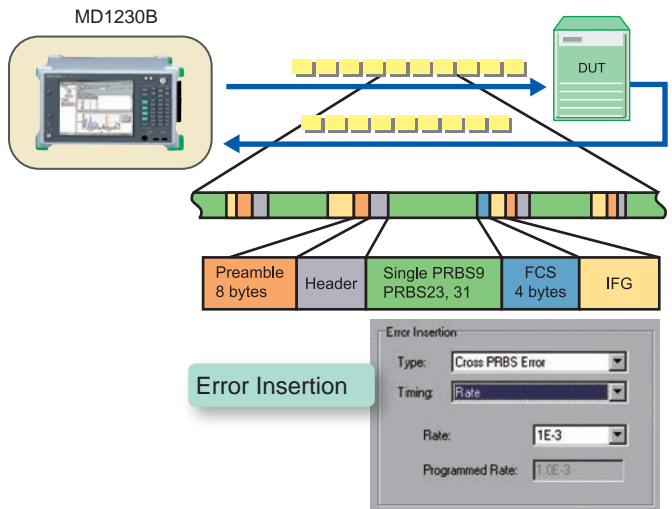

Network System Verification

■ PON System Verification


A single MD1230B unit can control a simultaneous end-to-end evaluation of a 32-branch PON system. Each unit also supports OAM analysis by capturing and decoding E-PON system frames for verification of PON functions.

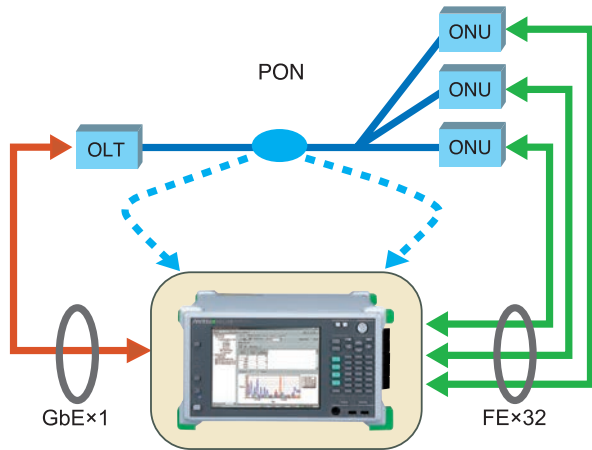

■ IPTV Streaming Service Verification

• High-Resolution Traffic Monitor



Previous measuring instruments (with 1-s resolution) are inadequate for analyzing burst data that can impact the quality of streaming services. However, the Application Traffic Monitor [Option-20] provides monitoring of burst data with 1 ms resolution for realtime oscilloscope-type analysis that could not be performed previously.

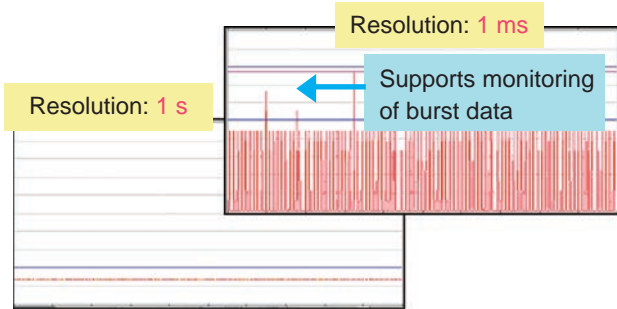

Same Traffic Monitored at Different Resolution

• IP Multicasts (Channel Zapping)

Surfing quickly through IPTV channels (called zapping) puts extremely high loads on the network and its routers. The multicast host emulation feature automatically increases and decreases the number of virtual hosts and channel zapping levels to verify and evaluate IP multicast QoS under high load conditions, which is difficult to achieve intentionally in a real network.

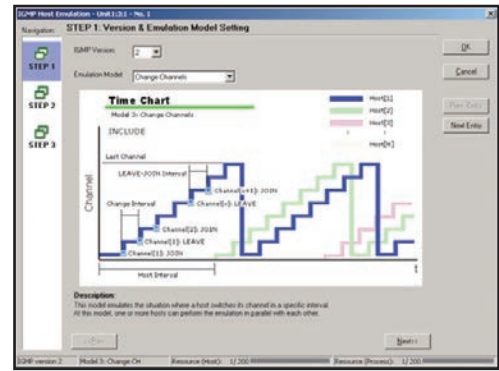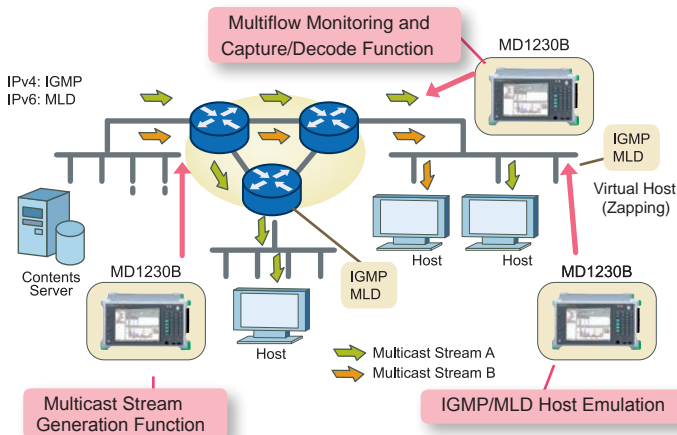


Multicast Host Emulation

<Multicast Host Emulation>

Multicast protocols that can be analyzed and emulated:


- IGMPv2/IGMPv3
- MLDv1/MLDv2 [Option-12]

• Traffic Impairment Emulator

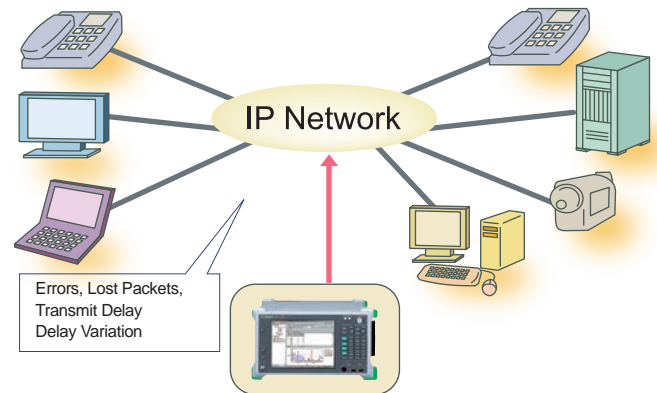

The Traffic Impairment Emulator [Option-17] emulates network faults to evaluate and verify service quality under hypothetical fault conditions.

Service quality can be checked by emulating packet loss, errors, and delays occurring in actual networks, such as IPTV and VoIP streams. In addition, because the effect of network faults can be varied in real time, different networks conditions can be emulated effectively.

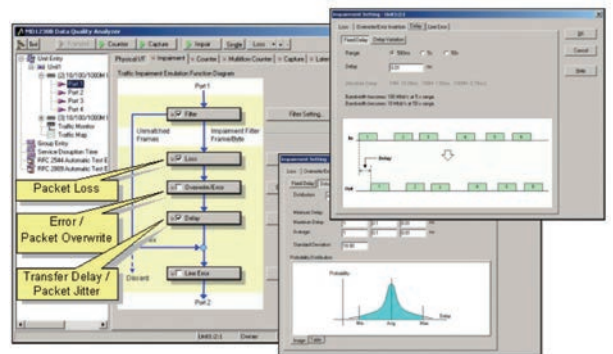

<Traffic Impairment Emulator>*1

The following effects can be inserted:


- Packet Loss
- Error/Packet Overwrite
- Delay (Transmission Delay 51.2 s² max.) /Packet Jitter

*1: The Traffic Impairment Emulator uses Ports 1 and 2 of the MU120121A 10/100/1000M Ethernet Module or the MU120122A Gigabit Ethernet Module.


*2: When using 50-s range (guaranteed bandwidth: 10 Mbps)

• Delay Time Distribution (Packet Jitter)

Packet jitter impacting the quality of real-time services can be monitored.

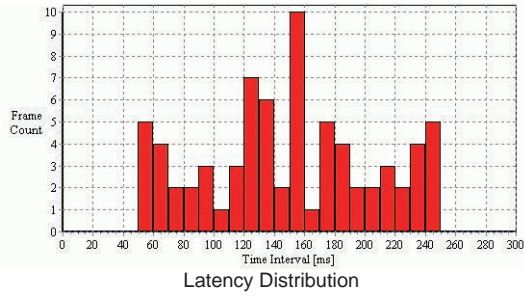



* When using test packets

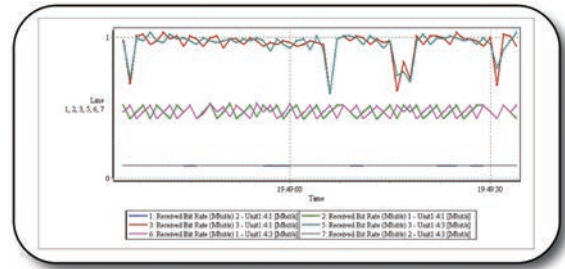

■ Carrier Class Network Service Verification

• Multiflow Counter QoS Priority Control Verification

Emulating high-load conditions and monitoring individual traffic flows under these conditions enables pre-commissioning QoS evaluation and verification.

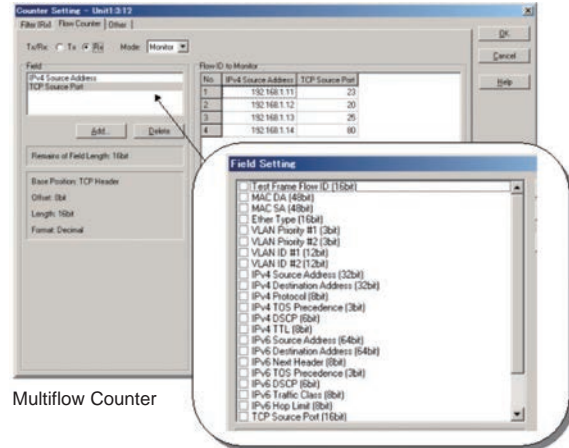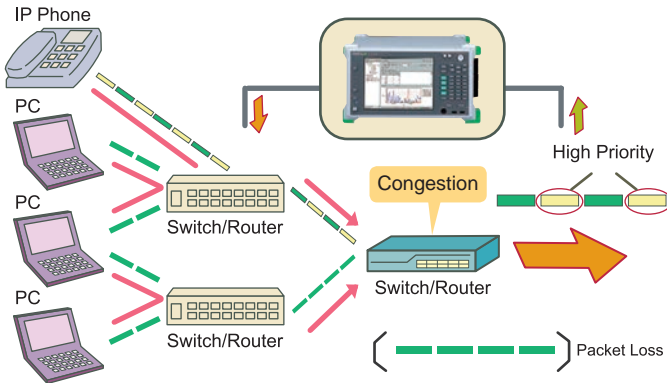


Multiflow Counter

Flow Definitions (Priority Parameters)

• Ethernet OAM Function Verification

The Ethernet OAM Protocol Emulation Function [Option-28] imitates equipment supporting Ethernet OAM (MEP) for evaluation and verification of networks and network equipment.

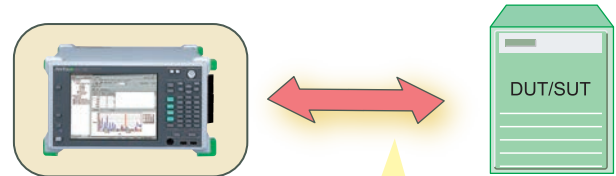

<Ethernet OAM Protocol Emulation>
 Supports ITU-T Y.1731 and IEEE 802.1ag CCM periodic send*1; LBM/LTM response*1; RDI addition*1; LOC/AIS/RDI detection*1; and OAM frame send and protocol analysis of captured frame

<Stream Generation>

Full-wire-rate, high-load traffic can be generated easily, something that is difficult to do intentionally on a real network. Using the stream editing functions supports flexible setting of QoS-related parameters.

ID	Distribution	Length	Protocol	VLAN	Errors
1	Next	Auto	TCP/IPv4	None	None
2	Next	Auto	TCP/IPv4	None	None
3	Next	Auto	TCP/IPv4	None	None
4	Jump to #1	Auto	TCP/IPv4	None	None

Stream Generation

*1: Enabled with MU120131A 10/100/1000M Ethernet Module, MU120132A Gigabit Ethernet Module, MU120121A 10/100/1000M Ethernet Module, MU120122A Gigabit Ethernet Module, and MU120138A 10 Gigabit Ethernet Module

<Multiflow Counter> *1

Simultaneous monitoring of every traffic condition (throughput/delay/frame loss) enables verification of QoS controls and measurement of QoS efficiency. Templates with various priority parameters, including MAC, VLAN, IP, and TCP/UDP port number, are provided.

*1: Using MU120131A 10/100/1000M Ethernet Module, MU120132A Gigabit Ethernet Module and MU120138A 10 Gigabit Ethernet Module Multiflow Counter

• Protocol Analysis

In addition to the standard protocol decoding functions, installing the Ethereal®/Wireshark® supports more detailed analysis of captured data.


* Ethereal® is registered trademarks of Ethereal, Inc.
 * Wireshark® is registered trademarks of Gerald Combs.



Useful Functions

PC Remote Control


Installing the MX123001A Control Software options in an external PC supports remote control of the MD1230B using an identical built-in GUI. Multiple users are supported, allowing up to 8 operators to share a single mainframe by sharing ports. Connecting up to eight MD1230B units in cascade provides expansion to 40 slots.

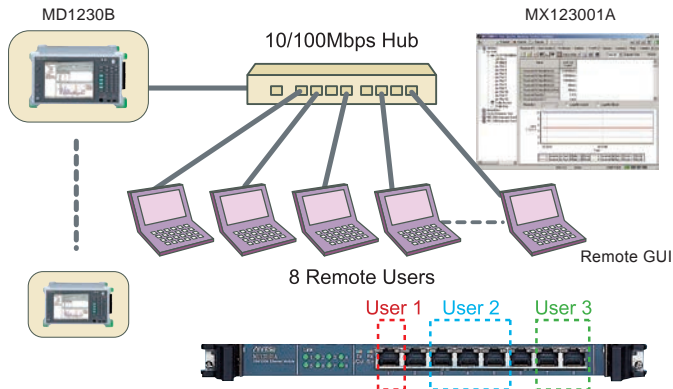

Cascade connection of up to 8 units

Report Function


Reports are output in HTML format. Counter, Multiflow Counter, Latency, RFC2544, and RFC2889 measurement results can be saved with attached graphs and measurement conditions. The Pause function can be used to save results to reports during measurement.

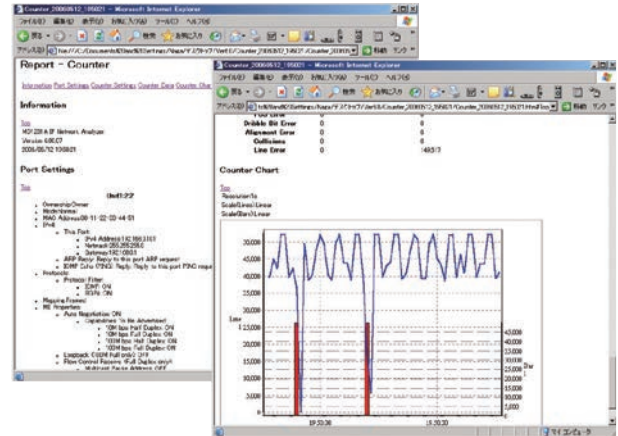


Remote Control Command Interfaces

Using the remote command interface allows automatic control of measuring instruments by sending text-based commands, making it easy to create applications for automatic testing. The RS-232C, GPIB, and Ethernet interfaces all support remote commands.

Single User

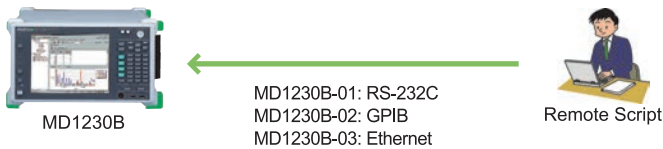

Multi User

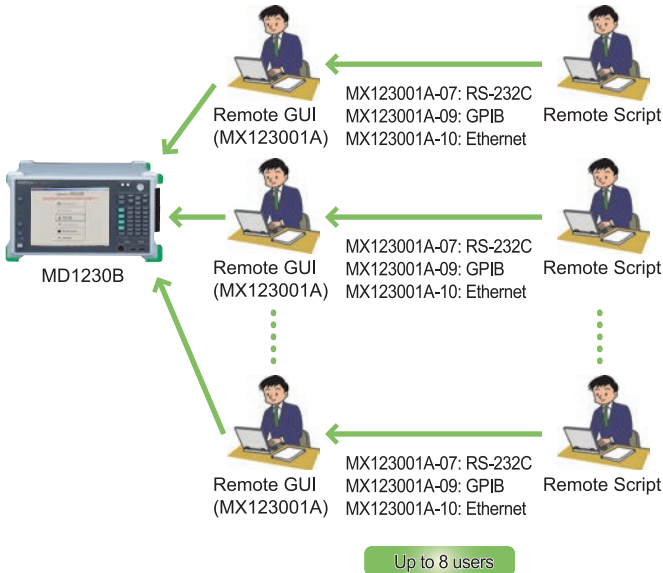



Functions

Model	MU120121A	MU120131A	MU120122A	MU120132A	MU120138A
Interface	10/100/1000BASE-T		10/100/1000BASE-T 1000BASE-X	1000BASE-X	10GBASE-R
Ports (Connector)	4 (RJ-45)	12 (RJ-45)	2 (RJ-45) 2 (SFP)	8 (SFP)	4 (SFP+)
Clock Variation	✓	✓*1	✓	✓*1	✓*1
Link Flap		✓		✓	✓*2
Auto MDI/MDI-X	✓	✓	✓		
Frame Generation					
Stream Generation (Tx Stream)	✓	✓	✓	✓	✓
Multi-Layer VLAN	✓	✓	✓	✓	✓
MAC Address Increment	✓	✓	✓	✓	✓
IP Address Increment	✓	✓	✓	✓	✓
TCP/UDP Port Number Increment	✓	✓	✓	✓	✓
Spanning Tree/Link Aggregation Frame (Option-23)	✓	✓	✓	✓	✓
Test Frame Addition	✓	✓	✓	✓	✓
Hardware Random Pattern	✓	✓	✓	✓	✓
Measurement					
Counter	✓	✓	✓	✓	✓
Multi-Flow Counter	✓*3	✓	✓*3	✓	✓
Capture	✓	✓	✓	✓	✓
Decode	✓	✓	✓	✓	✓
Latency	✓	✓	✓	✓	✓
Ping	✓	✓	✓	✓	✓
Ping6 (Option-12)	✓	✓	✓	✓	✓
Arrival Time Variation/Latency Variation	✓	✓	✓	✓	✓
Through Mode	✓	✓	✓	✓	✓
Monitor Mode	✓	✓	✓	✓	✓
Address Swap Mode	✓	✓	✓	✓	✓
Unframe BER Test	✓	✓	✓	✓	✓
Packet BER Test (Option-11)	✓	✓	✓	✓	✓
Auto Negotiation Analysis (Option-15)*4			✓	✓	
Application Traffic Monitor (Option-20)	✓	✓	✓	✓	
Link Fault Signalling (Module Option-03)					✓*5
Clock Measurement	✓	✓*1	✓	✓*1	✓*1
PoE (Module Option-02)		✓			
Ethernet OAM (Option-28)	✓	✓	✓	✓	✓
Automatic Test					
RFC2544 with VLAN	✓	✓	✓	✓	✓
RFC2889 with VLAN (Option-10)	✓	✓	✓	✓	✓
Protocol Emulation					
ARP	✓	✓	✓	✓	✓
ICMP	✓	✓	✓	✓	✓
OSPF (Option-07)	✓		✓		
BGP-4	✓		✓		
ICMPv6 (Option-12)	✓	✓	✓	✓	✓
OSPFv3 (Option-18)*6	✓		✓		
BGP4+ (Option-19)*6	✓		✓		
IGMPv2/IGMPv3	✓	✓	✓	✓	✓
IGAP (Option-14)	✓	✓	✓	✓	✓
MLD/MLDv2 (Option-12)	✓	✓	✓	✓	✓
MLDA (Option-22)*6	✓	✓	✓	✓	✓
PIM-SMv2 (Option-21)*7	✓		✓		
MPLS (LDP/CR-LDP) (Option-08)	✓		✓		
MPLS (RSVP-TE) (Option-09)	✓		✓		
Other					
Traffic Impairment Emulator (Option-17)*3	✓		✓		

*1: Requires MU120131A/32A-01 Clock Measurement option

*2: Excludes No/Go Check

*3: Supported by ports 1 and 2. Electrical ports (10/100/1000BASE-T) for MU120121A and Optical ports (1000BASE-X) for MU120122A.

*4: Supports SX/LX/LE/LR for SFP

*5: Requires MU120138A-03 Link Fault Signalling option


*6: Requires IPv6 Expansion (Option-12)

*7: Requires IPv6 Expansion (Option-12) when using IPv6 addresses.



Selection Guide

Module Slots

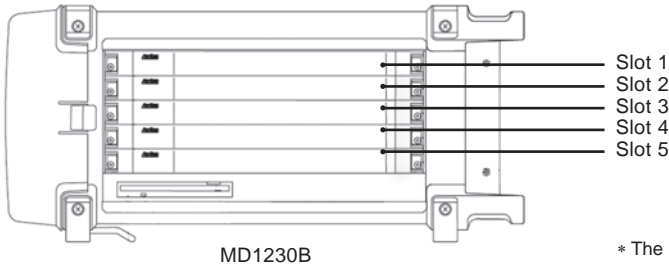

* The MD1230B is a 5-slot model accepting up to five measurement modules.

Installed Module Combinations

Model/Order No.	Name	No. of Slots Required	No. of Ports	Max. No. Modules	Supported Slots
MU120121A	10/100/1000M Ethernet Module	1	4	5	1 to 5
MU120122A	Gigabit Ethernet Module	1	4	5	1 to 5
MU120131A	10/100/1000M Ethernet Module	1	12	5	1 to 5
MU120132A	Gigabit Ethernet Module	1	8	5	1 to 5
MU120138A	10 Gigabit Ethernet Module	1	4	5	1 to 5

Mainframe Options

Model/Order No.	Name
MD1230B-01	RS-232C Control
MD1230B-02	GPIO Control
MD1230B-03	Ethernet Control
MD1230B-07	OSPF Protocol
MD1230B-08	MPLS (LDP/CR-LDP) Protocol
MD1230B-09	MPLS (RSVP) Protocol
MD1230B-10	RFC2889 Benchmarking Test
MD1230B-11	Packet BER Test
MD1230B-12	IPv6 Expansion
MD1230B-14	IGAP Protocol
MD1230B-15	Auto Negotiation Analysis
MD1230B-17	Traffic Impairment Emulator
MD1230B-18	OSPFv3 Protocol* ¹
MD1230B-19	BGP4+ Protocol* ¹
MD1230B-20	Application Traffic Monitor
MD1230B-21	PIM-SMv2 Protocol* ²
MD1230B-22	MLDA Protocol* ¹
MD1230B-23	Spanning Tree/Link Aggregation
MD1230B-28	Ethernet OAM

*1: Requires Option-12 IPv6 Expansion

*2: Requires Option-12 IPv6 Expansion when using IPv6 addresses



Module Options

Model/Order No.	Name
MU120131A-01, MU120132A-01, MU120138A-01	Clock Measurement
MU120131A-02	PoE
MU120138A-03	Link Fault Signalling



Specifications

MD1230B Data Quality Analyzer

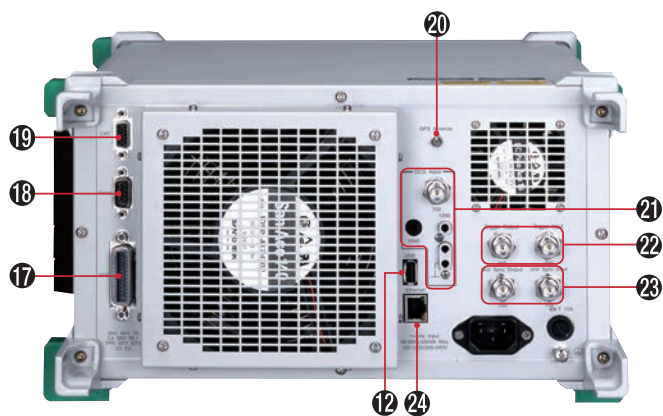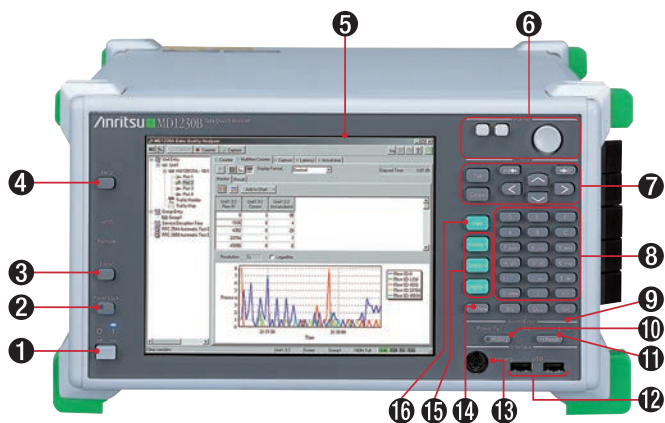

1	Power	Switches power on and off. LED lights at MD1230B power-on
2	Panel Lock	Disables input from keys and mouse
3	Local	Switches from remote control mode to local control mode
4	Help	Displays help information about current screen
5	LCD	8.4" TFT-LCD, SVGA (800 × 600)
6	Pointer	Enables operator to perform same operations as mouse
7	Cursor	Set: Sets data Cancel: Cancels data setting v ^ < > : Scrolls screen cursor R <-, -> F: Scrolls setting items
8	Input Keys	Input numeric values and characters
9	Error/Alarm	Displays receiver errors and alarms
10	History	At on, Error/Alarm LED [9] stays on after error or alarm displayed. At off, LED [9] flashes after error or alarm display
11	H.Reset	Resets history data
12	USB	Ports to connect USB devices (2 ports on front and 1 port on back)
13	Keyboard	Connects PS/2 keyboard
14	Print Now	Prints screen at external printer
15	Display1 to 3	Saves specified screen. Pressing one of these buttons for more than 2 seconds records tab positions on current screen. Pressing for less than 2 seconds displays stored tab positions
16	View*1	Switches between tree view and graphical view
17	GPIB	GPIB interface connector
18	RS-232C	RS-232C interface connector
19	CRT	VGA connector to connect external display
20	GPS Antenna	Connects GPS antenna
21	DCS Input	Connector to input clock or data to synchronize SDH/SONET signals to external clock
22	Trigger	Input: Connector to input external trigger signals to perform APS test and frame capture Output: Connector to output trigger signals generated by frame capture
23	Unit Sync. Input/Output	Unit sync. input/output connector to synchronize time between MD1230B
24	Ethernet	Ethernet interface (10BASE-T/100BASE-TX) to connect external controller
25	Module Slots	For installing up to five interface modules
26	FDD	Floppy disk drive

*1: This function is disabled in Ver 7.0 or later.

MD1230B Mainframe Specifications

Model		MD1230B Data Quality Analyzer
Indicator	LCD	8.4", Color TFT, SVGA (800 × 600)
	LED	Power, HDD, Remote, Panel Lock, Power Fail, Error, Alarm, History
OS	Windows® XP Professional	
Storage Unit	HDD and 3.5" FDD	
Interface	RS-232C, GPIB, Ethernet (RJ-45), USB1.1 × 3 ports, Keyboard (PS/2), GPS antenna, CRT (15-pin mini D-sub)	
	Trigger	Trigger Input: For APS test and frame capture Trigger Output: Capture trigger Level: TTL (Active High) Connector: BNC (75 Ω)
	Unit Sync. Input/Output	Time Synchronization for MD1230B Level: TTL Connector: BNC (75 Ω)
	DCS Input	Frequency Clock: 1.544 MHz, 2.048 MHz, 64 kHz + 8 kHz Data: 1.544 Mbit/s, 2.048 Mbit/s Input Range: ±50 ppm Level/Code 1.544 M: ANSI T1.403 (B8ZS) 2.048 M: ITU-T G.703 Table 10 (HDB3) 64 kHz + 8 kHz: 0.63 to 1.1 Vo-p (AMI, 8 kHz violation) Connector 2.048 MHz, 2.048 Mbit/s: BNC (75 Ω) 2.048 MHz, 2.048 Mbit/s, 64 kHz + 8 kHz: Siemens (120 Ω balanced) 1.544 MHz, 1.544 Mbit/s: BANTAM (100 Ω balanced)
Remote Control	Remote control using LAN (10BASE-T/100BASE-TX) with MX123001A Remote command control with RS-232C (Option-01) or GPIB (Option-02) or LAN (10BASE-T/100BASE-Tx, Option-03/ Option-06)	
Input Device	Pointing device, front keys	
Power	100 to 120/200 to 240 Vac (autoswitching), 50 Hz to 60 Hz	
Power Consumption	≤650 VA	
Operational Temperature and Humidity	+5° to +40°C, +20% to +80%	
Dimensions and Mass	320 (W) × 177 (H) × 350 (D) mm, ≤15 kg (excluding options and plug-in modules)	
EMC	EN 61326-1, EN 61000-3-2	
LVD	EN 61010-1	
Laser Safety	Depends on installed module. Refer to the safety standards for each module.	
Number of Slots	5	

*: See the selection guide and ordering information for supported modules and options.

*: Windows® is a registered trademark of Microsoft Corporation in the USA and other countries.

• Express Flow Module Specifications

Model	MU120131A	MU120132A	MU120138A	
Name	10/100/1000M Ethernet Module	Gigabit Ethernet Module	10 Gigabit Ethernet Module	
Specification	10BASE-T, 100BASE-TX, 1000BASE-T	1000BASE-SX/LX/LE/LR (depends on SFP Module)	10GBASE-SR/LR/ER (depends on SFP+ Module)	
Connector	RJ-45 (Auto MDI/MDI-X)	SFP (LC)	SFP+ (LC)	
Number of Ports	12	8	4	
Bit Rate	10, 100, 1000 Mbit/s	1000 Mbit/s	10 Gbit/s	
Duplex Mode	Full/Half*1	Full		
Auto Negotiation	On/Off		—	
Flow Control	On/Off			
LED	Link			
Clock Variation (Module Option-01)	On/Off, Resolution 1 ppm, -100 to +100 ppm Clock Accuracy: MD1230B: ±4 ppm, MP1590B: ±0.1 ppm			
Clock Measurement (Module Option-01)	Without 10BASE-T, Accuracy: MD1230B: ±4 ppm, MP1590B: ±0.1 ppm			
Mode	Normal, Monitor, Through (port 1 and port 2, port 3 and port 4, port 5 and port 6, port 7 and port 8, port 9 and port 10, port 11 and port 12), Address Swap			
PoE (Module Option-02)	Class: Class 0 to 4, off Level: off (0 to 31.7 V)/Under (31.7 to 43.3 V) /Normal (43.3 V and over)		—	
Link Up/Down	On/Off/Flap (Interval On:10 to 3600 s, Off: 1 to 3600 s, Count: 1 to 65535, Infinite), No/Go Check: On/Off		On/Off/Flap (Interval On:10 to 3600 s, Off: 1 to 3600 s, Count: 1 to 65535, Infinite), No/Go Check: None	
Frame Generation (Tx Stream)				
Streams	256/Port			
Stream Setting	Stream Transport Mode: Continuous, Continuous Burst, Stop after this Stream, Next Stream, Jump to Stream, Jump to Stream for Count (Loop Count: 1 to 16,000,000), Jump to Stream for Count and Stop (Loop Count: 1 to 16,000,000)			
Frames per Burst	1 to 16,777,215		1 to 1,099,511,627,775	
Bursts per Stream	1 to 1,099,511,627,775			
Gap Setting	Inter Frame Gap	1000BASE-T: Resolution of 8 ns, 80 ns to 120 s settable as Fixed or Random 100BASE-TX: Resolution of 80 ns, 800 ns to 1200 s settable as Fixed or Random 10BASE-T: Resolution of 800 ns, 8 μs to 12000 s settable as Fixed or Random	1000BASE-T: Resolution of 8 ns, 64 ns to 120 s settable as Fixed or Random	Resolution of 0.8 ns, 7.2 ns to 120 s settable as Fixed or Random
	Inter Burst Gap	1000BASE-T: Resolution of 8 ns, 80 ns to 120 s settable as Fixed 100BASE-TX: Resolution of 80 ns, 800 ns to 1200 s settable as Fixed	1000BASE-T: Resolution of 8 ns, 64 ns to 120 s settable as Fixed	Resolution of 0.8 ns, 7.2 ns to 120 s settable as Fixed
	Inter Stream Gap	10BASE-T: Resolution of 80 ns, 800 ns to 1200 s settable as Fixed 10BASE-T: Resolution of 800 ns, 8 μs to 12000 s settable as Fixed		Resolution of 0.8 ns, 9.6 ns to 120 s settable as Fixed
Frame Setting	Preamble Size: 4 bytes to 255 bytes		Preamble Size: 2 bytes to 255 bytes	
	MAC Address: Fixed, Increment, Decrement, or Random (Changeable part specified in 4-bit units) VLAN tag*2: Up to 10 layer VLAN tags appended. VLAN ID settable to Increment, Decrement, or Random MPLS label*2: Up to 10 MPLS labels appended. Fixed setting Protocol Editing: None, ARP, IPv4, IGMP/IPv4, ICMP/IPv4, TCP/IPv4, UDP/IPv4, RIP/UDP/IPv4, DHCP/UDP/IPv4, IPv6, IPX, IS-IS, MAC Control Frame (Pause Frame) Support by IPv6 Expansion (Option-12): ICMPv6/IPv6, TCP/IPv6, UDP/IPv6, IPv6 over IPv4, ICMPv6/IPv6 over IPv4, TCP/IPv6 over IPv4, UDP/IPv6 over IPv4 Supported by MLDA Protocol (Option-22): ICMPv6 MLDA Type Message Supported by Spanning Tree/Link Aggregation (Option-23): STP Configuration BPDU, STP TCN BPDU, RST BPDU, MST BPDU, LACPDU, Marker PDU, Marker Response PDU IPv4/IPv6: IP Destination/Source Address independently set to Fixed, Increment, Decrement, or Random TCP/UDP: Either Destination Port Number or Source Port Number set to Increment or Random Data Field: Set any parts of data field as All 0, All 1, Alternate 1/0 (Each Bit, Each 2 Bits, Each 4 Bits, Each 1 byte, Each 2 bytes), Increment, Decrement, or Random Only Data Field 1 settable to Programmable, Single PRBS9, Time Stamp*3, Sequence Number*3,*9, Hardware Random Pattern*3. Test Frame. settable Flow ID number when Test Frame used Programmable Header Pattern: One user-defined pattern settable Supported by Ethernet OAM (Option-28) : CCM, LBR, LBM, LTR, LTM, AIS, LCK, TST, APS, MCC, LMR, LMM, 1DM, DMR, DMM, EXR, EXM, VSR, VSM Each captured frame can be sent as Tx Stream.			
Frame Size	48 bytes to 10,000 bytes, settable as Auto, Fixed, Increment*4, or Random*4			
Error Insertion	Ethernet	FCS Error, Undersize, Oversize, Fragment, Oversize & FCS Error		
	IP	Dribble Bit Error, Alignment Error, Collision	Line Error (8B/10B Code Error, Running Disparity Error) Line Error (XGMII)	
	TCP/UDP	IPV4 Header Checksum Error		
	Data (Option-11)	TCP/UDP Checksum Error		
Unframe BER Setting	PRBS Error: Single PRBS9, PRBS23 (Cross), PRBS31 (Cross)		Test Pattern: All 0, All 1, User 16, PRBS23, PRBS31 Test Pattern: All 0, All 1, User 16, PRBS23, PRBS31, CJPAT, CRPAT	
	Error Insertion: Bit All			
Cross PRBS Error Setting	Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 9.9E-3)		Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 2.0E-3)	
	Test Pattern: Single, PRBS23, PRBS31			
Fragment Tool	Error Insertion: Cross PRBS Error			
	Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 9.9E-3)		Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 2.0E-3)	
Fragment Tool	Stream ID: 1 to 255, All, MTU: 1 byte to 9936 bytes			
	Number of datagrams: 1 to 127 Initial Identification: 0x0000 to 0xffff (IPv4), 0x00000000 to 0xffffffff (IPv6), Increment Identification: On/Off			

Model	MU120131A	MU120132A	MU120138A
Measurement Function			
Counter	Ethernet	Transmitted/Received Frame Count, Transmitted/Received Frame Rate, Transmitted/Received Bit Rate, Transmitted/Received Byte Count, Transmitted/Received Rate, FCS Error, Undersize, Fragment, Oversize, Oversize & FCS Error, Line Error, MAC Control Frame, Transmitted/Received ARP Request, Transmitted/Received ARP Reply, Frequency, Frequency Difference, Link Failed	
		Dribble Bit Error, Alignment Error, Collision, PoE Alarm (Module Option-02)	Byte Alignment Error, Preamble CRC Error
	Ethernet OAM (Option-28)	LOC, AIS, RDI (shared resolution: 0.1 ms)	
	IPv4	Transmitted/Received IPv4 Packet Count, Transmitted/Received IPv4 Packet Rate, Transmitted/Received Ping Request, Transmitted/Received Ping Reply, IP Header Checksum Error	
	IPv6 (Option-12)	Transmitted/Received IPv6 Packet Count, Transmitted/Received IPv6 Packet Rate, Transmitted/Received ICMPv6 (NS) Count, Transmitted/Received ICMPv6 (NA) Count, Transmitted/Received ICMPv6 (Echo Request) Count, Transmitted/Received ICMPv6 (Echo Reply) Count	
	TCP/UDP	Received TCP Packet Count, Received TCP Packet Rate, Received UDP Packet Count, Received UDP Packet Rate, TCP Checksum Error *5, UDP Checksum Error*5	
	Data	Capture Trigger, Capture Filter, User-Defined 1 Count/Rate, User-Defined 2 Count/Rate, QoS 0 to 7 Frame Count/Rate QoS Counter Setting: QoS target is IPv4 (ToS) or VLAN tag (Priority) .	
	Packet BER Test (Option-11)	Transmitted/Received Test Frame Count, Sequence Error, Received PRBS Error Frame Count/Rate, Received PRBS Error Bit Count/Rate	
	Unframed BER Test	Bit Error Count/Rate, Pattern Sync. Loss Count/Second	
	LFS (Module Option-03)	—	Transmitted/Received RF Signal Transmitted/Received LF Signal
Multi-flow Counter	(All Ports) settable as up to 16 bits 4 filters to count each value at a special bit in frames. (Max 255 values) 255 flow/unit counters are supported for real time count. Flow count item: Transmitted/Received Frame Count, Transmitted/Received Frame Rate, Transmitted/Received Bit Rate, Transmitted/Received Byte Count, Transmitted/Received Rate, Latency, Sequence Error		
Latency	Displayed when Test Frames received. Result includes 1s sampling value, max, min, avg. and number of samples		
Frame Arrival Time/Latency Distribution	32 counters display result. Resolution: Frame Arrival Time: 1 µs, 10 µs, 100 µs, 1 ms, 10 ms, 100 ms, 1 s Latency Distribution: 50 ns, 100 ns, 1 µs, 10 µs, 100 µs, 1 ms, 10 ms, 100 ms		
Custom Counter	Frame Loss, Frame Loss Rate, Received bit Rate, Received Average Frame Size (byte), Service Disruption Time		
Capture	Capture Buffer*6	16 Mbytes/port	256 Mbytes/port
	Preamble Capture	On/Off	
	Capture Filter/Trigger*6	At following conditions for each port, Capture Filter/Trigger condition settings: Condition: 128-bit pattern 1 to 4, Error Only capture trigger set to following: Traffic Over, Latency Over, External Trigger, Manual Trigger	
	Decode Protocol	Ethernet (Type II, IEEE802.3, Mac Control), VLAN, MPLS, LLC, LACP, BPDU (STP, RST, MST), ARP, Ethernet OAM, IP, IPv6 (include Extended Header), IPX, OSINL, IS-IS, IGMP (include IGAP), ICMP, ICMPv6 (include NDP, MLD, MLDA) TCP, UDP, OSPF, OSPFv3, DVMRP, LDP (CR-LDP), BGP4, RIP, DHCP, RSVP (RSVP-TE), BGP4+, PIM-SMv2, PPP (include LCP, IPCP, IPV6CP, OSINLCP, MPLSPP), CiscoHDLC, MAPOS, NSP, SSP, Test Frame, Preamble (include E-PON frame), OAM (IEEE802.3), MPCP, EoPMLS	
Extended Decode Protocol	MD1230B includes Ethereal®/Wireshark® Convert Function		
Protocol Emulation	Ethernet OAM (Option-28) *7, ARP, ICMP, ICMPv6 (Option-12), IGMPv2, IGMPv3, IGAP (Option-14), MLD (Option-12), MLDv2 (Option-12), MLDA (Option-22)*8		
Auto Negotiation Analysis (Option-15)	—	10B Code Data Transmitted, Auto Negotiation Sequence Capture, Link Timer Value Variable functions	—
Link Fault Signalling (Module Option-03)	—	—	LF, RF, User-Defined Signal Tx XGMII Signal Capture
Application Traffic Monitor (Option-20)	Support 1 ms traffic monitoring at 4 ports (4 flows max.)		—
RFC2544 Automatic Test	Following 6 types of tests supported with one layer VLAN tags. (MD1230B supports continuous tests [1] to [5]) [1] Throughput, [2] Latency, [3] Frame loss rate, [4] Back-to-back frames, [5] System recovery, [6] Reset		
RFC2889 Automatic Test (Option-10)	Following 10 types of tests supported with one layer VLAN tags: [1] Fully meshed throughput, frame loss, and forwarding rate [6] Forward pressure and maximum forwarding rate [2] Partially meshed one-to-many/many-to-one [7] Address caching capacity [3] Partially meshed multiple devices [8] Address learning rate [4] Partially meshed unidirectional traffic [9] Error-frame filtering [5] Congestion control [10] Broadcast frame forwarding and latency		
Laser Safety	—	IEC 60825-1: 2007: CLASS 1 21CFR1040.10*11	IEC 60825-1: 2007: CLASS 1M (SFP+ 10GBASE-SR)*10 IEC 60825-1: 2007: CLASS 1 (SFP+ 10GBASE-LR/ER) 21CFR1040.10*11

- *1: Supports link test only in 1000BASE-T half-duplex mode
- *2: VLAN tag and MPLS labels cannot both be used simultaneously.
- *3: When a sequence number or time stamp or hardware random pattern is used, the checksum field of the TCP/UDP packet contains an error code.
- *4: Increment and Random settings can be specified for the frame size only when none is selected as the protocol.
- *5: Packet fragments in the IP layer are not counted as error packets.
- *6: Sometimes, when using the capture filter, captured data may be smaller than the memory buffer, depending on the frame size.
- *7: Possible at port setting screen
- *8: Requires IPv6 Expansion (Option-12)
- *9: Sequence number is continuous in each Flow ID.

- *10: Warning: It may be dangerous to look directly into the laser light when monitoring laser output using optical equipment from a distance of less than 100 mm.
- *11: Excludes deviations caused by conformance to Laser Notice No. 50 dated June 24, 2007.

Safety measures for laser products

This product complies with optical safety standards in 21CFR1040.10 and IEC 60825-1; the following descriptive labels are affixed to the product.



MU120131A 10/100/1000BASE-T 12 Ports



MU120132A 1000BASE-X(SFP) 8 Ports



MU120138A 10GBASE-R (SFP+) 4 Ports

• Power Protocol Module Specifications

Model	MU120121A	MU120122A
Name	10/100/1000M Ethernet Module	Gigabit Ethernet Module
Specification	Electrical: 10BASE-T, 100BASE-TX, 1000BASE-T	Electrical: 10BASE-T, 100BASE-TX, 1000BASE-T Optical: 1000BASE-SX/LX/LE/LR (depends on SFP Module)
Connector	RJ-45 (Auto MDI/MDI-X)	SFP (LC), RJ-45 (Auto MDI/MDI-X)
Number of Ports	4	SFP: 2, RJ-45: 2
Bit Rate	10, 100, 1000 Mbit/s	
Duplex Mode	Full/Half ^{*1}	Electrical: Full/Half ^{*1} , Optical: Full
Auto Negotiation	On/Off	
Flow Control	On/Off	
LED	Tx/Collision, Rx/Error, 10M, 100M, 1000M, Duplex	Electrical: Tx/Collision, Rx/Error, 10M, 100M, 1000M, Duplex Optical: Link, Tx, Rx, Error
Clock Variation	On/Off, Resolution 1 ppm, -100 to +100 ppm Clock Accuracy: ±4 ppm	
Clock Measurement	Without 10BASE-T, Accuracy: ±4 ppm	
Mode	Normal, Monitor, Through (port 1 and port 2, port 3 and port 4), Address Swap, Traffic Impairment Emulator (Option-17) ^{*2}	
Link Up/Down	Manual On/Off	
Frame Generation (Tx Stream)		
Streams	256/Port	
Stream Setting	Stream Transport Mode: Continuous, Continuous Burst, Stop after this Stream, Next Stream, Jump to Stream, Jump to Stream for Count (Loop Count: 1 to 16,000,000)	
Frames per Burst	1 to 16,777,215	
Bursts per Stream	1 to 1,099,511,627,775	
Gap Setting	Inter Frame Gap	Electrical: 1000BASE-T: Resolution of 8 ns, 80 ns to 120 s settable as Fixed or Random 100BASE-TX: Resolution of 80 ns, 800 ns to 1200 s settable as Fixed or Random 10BASE-T: Resolution of 800 ns, 8 μs to 12000 s settable as Fixed or Random Optical: Resolution of 8 ns, 64 ns to 120 s settable as Fixed or Random
	Inter Burst Gap	Electrical: 1000BASE-T: Resolution of 8 ns, 80 ns to 120 s settable as Fixed, 100BASE-TX: Resolution of 80 ns, 800 ns to 1200 s settable as Fixed, 10BASE-T: Resolution of 800 ns, 8 μs to 12000 s settable as Fixed
	Inter Stream Gap	Optical: Resolution of 8 ns, 64 ns to 120 s settable as Fixed
Frame Setting	Preamble Size: 4 bytes to 255 bytes	
	Preamble Size: Electrical: 4 bytes to 255 bytes, Optical: 2 bytes to 255 bytes	
Frame Setting	MAC Address: Fixed, Increment, Decrement, or Random (Changeable part specified in 4-bit units)	
	VLAN tag ^{*3} Up to 10 layer VLAN tags appended. VLAN ID settable to Increment, Decrement, or Random	
Frame Setting	MPLS label ^{*3} Up to 10 MPLS labels appended. Fixed setting	
	Protocol Editing: None, ARP, IPv4, IGMP/IPv4, ICMP/IPv4, TCP/IPv4, UDP/IPv4, RIP/UDP/IPv4, DHCP/UDP/IPv4, IPv6, IPX, IS-IS, MAC Control Frame (Pause Frame)	
Frame Setting	Support by IPv6 Expansion (Option-12): ICMPv6/IPv6, TCP/IPv6, UDP/IPv6, IPv6 over IPv4, ICMPv6/IPv6 over IPv4, TCP/IPv6 over IPv4, UDP/IPv6 over IPv4	
	Supported by PIM-SMv2 Protocol (Option-21): PIM Register Message	
Frame Setting	Supported by MLDA Protocol (Option-22): ICMPv6 MLDA Type Message	
	Supported by Spanning Tree/Link Aggregation (Option-23): STP Configuration BPDU, STP TCN BPDU, RST BPDU, MST BPDU, LACPDU, Marker PDU, Marker Response PDU	
Frame Setting	IPv4/IPv6: IP Destination/Source Address independently set to Fixed, Increment, Decrement, or Random	
	TCP/UDP: Either Destination Port Number or Source Port Number set to Increment or Random	
Frame Setting	Data Field: Set any parts of data field as All 0, All 1, Alternate 1/0 (Each Bit, Each 2 Bits, Each 4 Bits, Each 1 byte, Each 2 bytes), Increment, Decrement, or Random	
	Only Data Field 1 settable to Programmable, Single PRBS9, Time Stamp ^{*4} , Sequence Number ^{*4} , Hardware Random Pattern ^{*4} , Test Frame. settable Flow ID number when Test Frame used.	
Frame Setting	Programmable Header Pattern: One user-defined pattern settable	
	Supported by Ethernet OAM (Option-28): CCM, LBR, LBM, LTR, LTM, AIS, LCK, TST, APS, MCC, LMR, LMM, 1DM, DMR, DMM, EXR, EXM, VSR, VSM	
Frame Setting	Each captured frame can be sent as Tx Stream.	
	Frame Size: 48 bytes to 10,000 bytes, settable as Auto, Fixed, Increment ^{*5} , or Random ^{*5}	
Error Insertion	Ethernet	FCS Error, Undersize, Oversize, Fragment, Oversize & FCS Error
	IP	Electrical: Dribble Bit Error, Alignment Error, Collision, Optical: Line Error (8B/10B Code Error, Running Disparity Error)
	TCP/UDP	IPv4 Header Checksum Error
	Data (Option-11)	TCP/UDP Checksum Error
Unframed BER Setting	PRBS Error	
	Test Pattern (Electrical): All 0, All 1, User 16, PRBS23, PRBS31	
Unframed BER Setting	Test Pattern (Optical): All 0, All 1, User 16, PRBS23, PRBS31, CJPAT, CRPAT	
	Error Insertion: Bit All	
Fragment Tool	Insertion Timing: Single, Rate (1.0E-9, 1.0E-8, 1.0E-7, 1.0E-6, 1.0E-5, 1.0E-4, 1.0E-3), Programmable Rate (1.0E-10 to 9.9E-3)	
	Stream ID: 1 to 255, All, MTU: 1 byte to 9936 bytes	
Fragment Tool	Number of datagrams: 1 to 127	
	Initial Identification: 0x0000 to 0xffff (IPv4), 0x00000000 to 0xffffffff (IPv6)	
Fragment Tool	Increment Identification: On/Off	



MU120121A 10/100/1000BASE-T 4 Ports



MU120122A 10/100/1000BASE-T, X (SFP) -2 pairs of ports

Model	MU120121A	MU120122A
Measurement Function		
Counter	Ethernet	Transmitted/Received Frame Count, Transmitted/Received Frame Rate, Transmitted/Received Bit Rate, Transmitted/Received Byte Count, Transmitted/Received Rate, FCS Error, Undersize, Fragment, Oversize, Oversize & FCS Error, Line Error, MAC Control Frame, Transmitted/Received ARP Request, Transmitted/Received ARP Reply, Transmitted/Received Protocol Frame
		Dribble Bit Error, Alignment Error, Collision Electrical: Dribble Bit Error, Alignment Error, Collision Optical: Byte Alignment Error
	Ethernet OAM (Option-28)	LOC, AIS, RDI (shared resolution: 0.1 ms)
	IPv4	Transmitted/Received IPv4 Packet Count, Transmitted/Received IPv4 Packet Rate, Transmitted/Received Ping Request, Transmitted/Received Ping Reply, IP Header Checksum Error
	IPv6 (Option-12)	Transmitted/Received IPv6 Packet Count, Transmitted/Received IPv6 Packet Rate, Transmitted/Received ICMPv6 (NS) Count, Transmitted/Received ICMPv6 (NA) Count, Transmitted/Received ICMPv6 (Echo Request) Count, Transmitted/Received ICMPv6 (Echo Reply) Count
	TCP/UDP	Received TCP Packet Count, Received TCP Packet Rate, Received UDP Packet Count, Received UDP Packet Rate, TCP Checksum Error ⁶ , UDP Checksum Error ⁶
	Data	Capture Trigger, Capture Filter, User-Defined 1 Count/Rate, User-Defined 2 Count/Rate, QoS 0 to 7 Frame Count/Rate QoS Counter Setting: QoS target is IPv4 (ToS) or VLAN tag (Priority) .
	Packet BER Test (Option-11)	Transmitted/Received Test Frame Count, Sequence Error, Received PRBS Error Frame Count/Rate, Received PRBS Error Bit Count/Rate
	Unframed BER Test	Bit Error Count/Rate, Pattern Sync. Loss Count/Second
	Traffic Impairment Emulator (Option-17)	(Ports 1 and 2 only) Impairment Filter Frame/Byte, Lost Frame, Unavoidably Dropped Frame, Passage Delay (0.001 ms units)
Multi-flow Counter	(Port 1, 2 only) settable as up to 16 bits filter to count each value at a special bit in frames. (Max 65,536 values) 32 of 65,536 counters are supported for real time count. Flow count item: Transmitted/Received Frame Count	
Latency	Displayed when Test Frames received. Result includes 1s sampling value, max, min, avg. and number of samples	
Frame Arrival Time/Latency Distribution	32 counters display result Resolution: Frame Arrival Time: 1 µs, 10 µs, 100 µs, 1 ms, 10 ms, 100 ms, 1 s Latency Distribution: 50 ns, 100 ns, 1 µs, 10 µs, 100 µs, 1 ms, 10 ms, 100 ms	
Custom Counter	Frame Loss, Frame Loss Rate, Received bit Rate, Received Average Frame Size (byte), Service Disruption Time	
Capture	Capture Buffer ⁷	64 Mbytes/port
	Preamble Capture	On/Off
	Capture Filter/Trigger ⁷	At following conditions for each port, Capture Filter/Trigger condition settings: Condition: 128-bit pattern × 4, Error Only capture trigger set to following: Traffic Over, Latency Over, External Trigger, Manual Trigger
	Decode Protocol	Ethernet (Type II, IEEE802.3, Mac Control), VLAN, MPLS, LLC, LACP, BPDU (STP, RST, MST), ARP, Ethernet OAM, IP, IPv6 (include Extended Header), IPX, OSINL, IS-IS, IGMP (include IGAP), ICMP, ICMPv6 (include NDP, MLD, MLDA) TCP, UDP, OSPF, OSPFv3, DVMRP, LDP (CR-LDP), BGP4, RIP, DHCP, RSVP (RSVP-TE), BGP4+, PIM-SMv2, PPP (include LCP, IPCP, IPV6CP, OSINLCP, MPLS), CiscoHDLC, MAPOS, NSP, SSP, Test Frame
Extended Decode Protocol	MD1230B includes Ethereal®/Wireshark® Convert Function	
Protocol Emulation	Ethernet OAM (Option-28) ⁸ , ARP, ICMP, OSPF (Option-07), BGP-4, ICMPv6 (Option-12), OSPFv3 (Option-18) ⁹ , BGP4+ (Option-19) ⁹ , IGMPv2, IGMPv3, IGAP (Option-14), MLD (Option-12), MLDv2 (Option-12), MLDA (Option-22) ⁹ , PIM-SMv2 (Option-21) ¹⁰ , MPLS (LDP/CR-LDP) (Option-08), MPLS (RSVP-TE) (Option-09), PPPoE (Option-26)	
Auto Negotiation Analysis (Option-15)	—	10B Code Data Transmitted, Auto Negotiation Sequence Capture, Link Timer Value Variable functions
Application Traffic Monitor (Option-20)	Support 1 ms traffic monitoring at 4 ports (4 flows max.)	
Traffic Impairment Emulator (Option-17)	Following effects can be added (only using full duplex mode) Frame Loss, Overwrite/Error ¹¹ , Delay, Line Error Delay: Fixed Delay: 500-ms range: 0.01 ms to 512 ms (Step: 0.01 ms), ±256 ns (guaranteed bandwidth: 1000 Mbps) 5-s range: 0.1 ms to 5120.0 ms (Step: 0.1 ms), ±2560 ns (guaranteed bandwidth: 100 Mbps) 50-s range: 1 ms to 51200 ms (Step: 1 ms), ±25600 ns (guaranteed bandwidth: 10 Mbps) Delay Variation: Uniform, Normal, Exponential, User defined	
RFC2544 Automatic Test	Following 6 types of tests supported with one layer VLAN tags. (MD1230B supports continuous tests [1] to [5]) [1] Throughput, [2] Latency, [3] Frame loss rate, [4] Back-to-back frames, [5] System recovery, [6] Reset	
RFC2889 Automatic Test (Option-10)	Following 10 types of tests supported with one layer VLAN tags: [1] Fully meshed throughput, frame loss, and forwarding rate [2] Partially meshed one-to-many/multi-to-one [3] Partially meshed multiple devices [4] Partially meshed unidirectional traffic [5] Congestion control	[6] Forward pressure and maximum forwarding rate [7] Address caching capacity [8] Address learning rate [9] Error-frame filtering [10] Broadcast frame forwarding and latency
Laser Safety	—	IEC 60825-1: 2007: CLASS 1 21CFR1040.10 ¹²

*1: Supports link test only in 1000BASE-T half-duplex mode.

*2: Port 1 and 2 can be selected only for the Traffic Impairment Mode when Impairment is chosen at the Setup Utility.

*3: VLAN tag and MPLS labels cannot be used simultaneously.

*4: When a sequence number or time stamp or hardware random pattern is used, the checksum field of the TCP/UDP packet contains an error code.

*5: Increment and Random settings can be specified for the frame size only when none is selected as the protocol.

*6: Fragmented packets in the IP layer are not counted as error packets.

*7: Sometimes, when using the capture filter, captured data may be smaller than the memory buffer, depending on the Frame size.

*8: Possible at port setting screen

*9: Requires IPv6 Expansion (Option-12)

*10: Requires IPv6 Expansion (Option-12) when using IPv6 addresses.

Option-21 only supports IPv4 addresses.

*11: Overwrite and Error cannot be used simultaneously.

*12: Excludes deviations caused by conformance to Laser Notice No. 50 dated June 24, 2007.

Safety measures for laser products

This product complies with optical safety standards in 21CFR1040.10 and IEC 60825-1; the following descriptive labels are affixed to the product.





Ordering Information

Please specify the model/order number, name and quantity when ordering.
The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name
Main Frame	
MD1230B	Data Quality Analyzer
Standard Accessories	
	Power Cord*1: 1 pc
F0113	Fuse, 15 A*1: 1 pc
B0329G	Front Cover (for 3/4MW4U)*1: 1 pc
B0500A	Side Cover*1: 1 pc
Z0847A	MD1230/MP1590 Family Software CD*1, *2: 1 pc
Plug-in Modules	
MU120121A	10/100/1000M Ethernet Module*11
MU120122A	Gigabit Ethernet Module*3, *11
MU120131A	10/100/1000M Ethernet Module
MU120132A	Gigabit Ethernet Module*3
MU120138A	10 Gigabit Ethernet Module*4
Options	
MD1230B-01	RS-232C Control
MD1230B-02	GPIB Control
MD1230B-03	Ethernet Control
MD1230B-07	OSPF Protocol
MD1230B-08	MPLS (LDP/CR-LDP) Protocol
MD1230B-09	MPLS (RSVP) Protocol
MD1230B-10	RFC2889 Benchmarking Test
MD1230B-11	Packet BER Test
MD1230B-12	IPv6 Expansion
MD1230B-14	IGAP Protocol
MD1230B-15	Auto Negotiation Analysis
MD1230B-17	Traffic Impairment Emulator*6
MD1230B-18	OSPFv3 Protocol*7
MD1230B-19	BGP4+ Protocol*7
MD1230B-20	Application Traffic Monitor
MD1230B-21	PIM-SMv2 Protocol
MD1230B-22	MLDA Protocol*7
MD1230B-23	Spanning Tree/Link Aggregation
MD1230B-28	Ethernet OAM
MU120131A-01	Clock Measurement
MU120131A-02	PoE
MU120132A-01	Clock Measurement
MU120138A-01	Clock Measurement
MU120138A-03	Link Fault Signalling

- *1: Supplied with main frame
- *2: CD includes installer, release notes and operation manual and cannot be purchased separately.
- *3: Requires SFP modules (sold separately).
In addition, operation with non-Anritsu modules not guaranteed.
- *4: Requires SFP+ module (sold separately).
In addition, operation with non-Anritsu modules not guaranteed
- *5: MD1230B-03 not required
- *6: Only ports 1 and 2 of the MU120121A/122A support the MD1230B-17 Traffic Impairment Emulator option. Moreover, only MU120121A/122A models shipped after March 7, 2008 with the "Supports Opt.17" sticker support the option.
- *7: Requires separate MD1230B-12
- *8: SFP modules sold as single units.
Two can be mounted in MU120122A and eight in MU120132A.
- *9: SFP+ modules sold as single units. Four can be mounted in MU120138A.
- *10: Required for synchronizing time between several units. MD1230B use BNC connectors; J0775B/D is required for connecting BNC connectors.
- *11: Custom-made product
- *12: Windows 2000, XP are supported.
- *13: Windows 2000, XP, 7 are supported.

Model/Order No.	Name
Software	
MX123001A	Data Quality Analyzer Control Software*5, *13
MX123001A-05	Data Quality Analyzer Control Software (5 licenses)*5, *13
MX123001A-08	Data Quality Analyzer Control Software (8 licenses)*5, *13
Software Options	
MX123001A-07	RS-232C Control*12
MX123001A-09	GPIB Control*12
MX123001A-10	Ethernet Control
Optional Accessories	
G0181A	SFP SX 850 nm*8
G0182A	SFP LX 1310 nm*8
G0183A	SFP LE 1310 nm*8
G0184A	SFP LR 1550 nm*8
G0238A	SFP+ SR 850 nm*9
G0239A	SFP+ LR 1310 nm*9
G0271A	SFP+ ER 1550 nm*9
J1049A	Fixed Optical Attenuator (SC, 5 dB)
J1049B	Fixed Optical Attenuator (SC, 10 dB)
J1049C	Fixed Optical Attenuator (SC, 15 dB)
J1271	Optical Fiber Cord (Duplex, SM, LC-LC connector), 2 m
J1272	Optical Fiber Cord (Duplex, SM, LC-SC connector), 2 m
J1273	Optical Fiber Cord (Duplex, GI, LC-LC connector), 2 m
J1274	Optical Fiber Cord (Duplex, GI, LC-SC connector), 2 m
J0775B	Coaxial Cable (BNC-P620 • 3C-2WS • BNC-P620, 75 Ω), 0.5 m*10
J0775D	Coaxial Cable (BNC-P620 • 3C-2WS • BNC-P620, 75 Ω), 2 m*10
J0008	GPIB Cable, 2 m
J1109B	LAN Cable (CAT5, cross), 5 m
J1110B	LAN Cable (CAT5, straight), 5 m
J1275	LAN Cable (CAT5E, straight), 1 m
J1275B	LAN Cable (CAT5E, straight), 5 m
J1275C	LAN Cable (CAT5E, cross), 1 m
J1275D	LAN Cable (CAT5E, cross), 5 m
Z0321A	Keyboard (PS/2)
Z0541A	USB Mouse
B0336C	Carrying Case (3/4MW4U, 350D)
B0530	Carrying Case caster for B0336C
B0533	Carrying Case
B0448	Soft Case
B0593A	Blank Panel
Z0849A	MD1230 /MP1590 Family Manual CD
W1927AE	MD1230A/B Operation Manual
W1928AE	MX123001A Control Software Operation Manual
W1929AE	MD1230A Remote Control Operation Manual
W2134AE	Application Traffic Monitor Operation Manual
W1931AE	Ethernet Module Operation Manual

• Maintenance Service

Model/Order No	Name
Maintenance Service	
***-ES210	2 Years Extended Warranty Service
***-ES310	3 Years Extended Warranty Service
***-ES510	5 Years Extended Warranty Service

*: Extends standard 1-year warranty at purchase to 2, 3, or 5 years.
Must be purchased separately when purchasing new Anritsu product.
(Cannot be purchased midway through standard 1-year warranty, at standard warranty expiry, or as combination of several multi-year contracts.)

***-ES210: MD1230B-ES210, MU120121A-ES210, MU120122A-ES210, MU120131A-ES210, MU120132A-ES210, MU120138A-ES210

***-ES310: MD1230B-ES310, MU120121A-ES310, MU120122A-ES310, MU120131A-ES310, MU120132A-ES310, MU120138A-ES310

***-ES510: MD1230B-ES510, MU120121A-ES510, MU120122A-ES510, MU120131A-ES510, MU120132A-ES510, MU120138A-ES510



B0336C Carrying Case



B0533 Carrying Case



B0448 Soft Case

● **United States**

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

● **Canada**

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

● **Brazil**

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

● **Mexico**

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

● **United Kingdom**

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

● **France**

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

● **Germany**

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

● **Italy**

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

● **Sweden**

Anritsu AB

Kistagången 20B, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

● **Finland**

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

● **Denmark**

Anritsu A/S (Service Assurance)

Anritsu AB (Test & Measurement)

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

● **Russia**

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.

Russia, 125009, Moscow

Phone: +7-495-363-1694

Fax: +7-495-935-8962

● **United Arab Emirates**

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

● **India**

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

● **Singapore**

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

● **P.R. China (Shanghai)**

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

● **P.R. China (Hong Kong)**

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

● **Japan**

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

● **Korea**

Anritsu Corporation, Ltd.

502, 5FL H-Square N B/D, 681
Sampyeong-dong, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

● **Australia**

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

● **Taiwan**

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

Please Contact: