

# High Load Checkweigher


for large cases and cartons



Checkweigher for Specific Applications


External Dimensions

KWS5888BFNN  
KWS5888BPNN

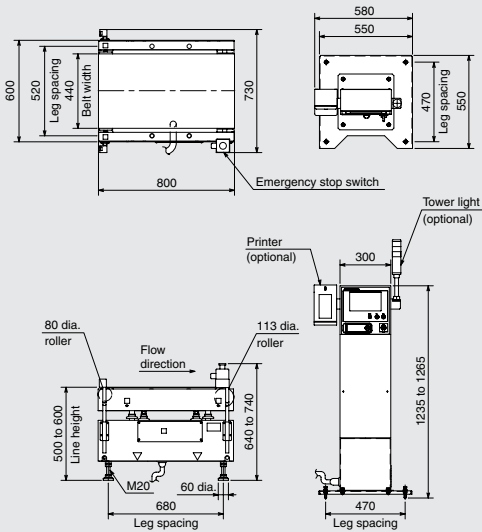

Units: mm

KWS5989BFNN  
KWS5989BPNN

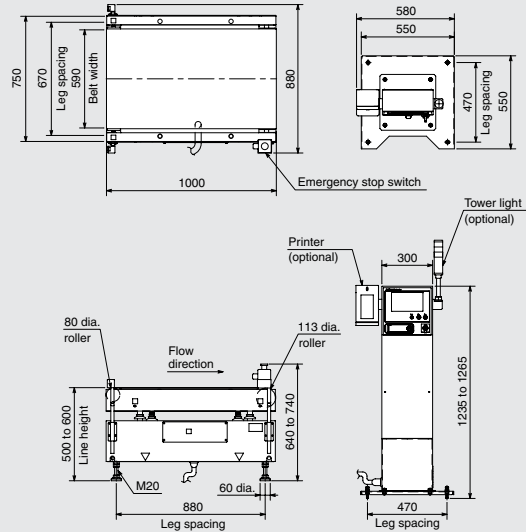

Units: mm

Specifications



Model	KWS5888BFNN KWS5888BPNN	KWS5989BFNN KWS5989BPNN
Weighing range	35 g to 35 kg	60 g to 60 kg
Scale interval	2 g	
Maximum speed <sup>1</sup>	40 products/min	35 products/min
Maximum accuracy (3σ) <sup>1</sup>	±5 g	
Display	8.5-inch wide color TFT LCD	
Operation method	Touch panel (Start, Stop, and Home are direct push buttons)	
Indication range	35180 g	60450 g
Preset memory	Maximum 200	
Classification	2 or 3	
Product size <sup>2</sup>	Width	200 to 500 mm
	Length	300 to 700 mm
	Height	5 to 1500 mm
Belt speed	15 to 42 m/min	
Power requirements <sup>3</sup>	200 Vac to 240 Vac +10% -15%, single phase, 50/60 Hz, 300 VA, rush current 40 A (typ.) (25 ms or less)	
Mass	130 kg	150 kg
Environmental conditions	0°C to 40°C (variation not to exceed 5°C/h to maintain accuracy), relative humidity 30% to 85%, non-condensing	
Protection class	IP30	
Exterior	F type: painted, P type: stainless (SUS304)	

1: Depends on the product to be weighed and the rejector.

2: The size of products to be weighed depends on the rejector; select a checkweigher together with a rejector. Consult us about semi-transparent and transparent products.

3: 100 Vac to 115 Vac is also available as an option.

Note: The noise level of the checkweighers does not exceed 70 dB(A).



ANRITSU INFIVIS INC. <https://www.anritsu.com/infivis>

1001 Cambridge Drive Elk Grove Village, IL 60007-2453  
Phone (847) 419-XRAY (9729) Fax (847) 537-8266

© ANRITSU INFIVIS CO., LTD. 2014

ISO14001 CERTIFICATE No.JQA-EM0210  
ISO 9001 CERTIFICATE No.JQA-0316

- Some products shown in this catalog may not be available in your country or region. Contact our sales representatives for details.
- To ensure proper operation, read the Operation Manual before using the machine.
- In addition to daily inspection, a full maintenance inspection should be completed annually.

Specifications are subject to change without notice. No part of this catalog may be reproduced without our permission.