Anritsu
Advancing beyond



XR75 DualX Poultry


All-new 2nd generation design with improved detection and TCO


THE NEW STANDARD IN POULTRY BONE DETECTION

Finding chicken bones with x-ray inspection is hard. Anritsu's 2nd generation poultry x-ray system greatly improves bone detection. It also has been completely re-engineered to better withstand the harsh environment of poultry and meat plants.

- **Enhanced Detection:** Now on Anritsu's proven XR75 platform, this second-generation dual-energy system offers even better bone detection and higher speed than its predecessor.
- **IP69K/Sanitary Design:** The robust, open design promotes thorough drainage and allows accessible high-pressure cleaning. Sloped surfaces, full sealed welds, and sealed hygienic belt minimize harborage points for continuous sanitary operation.
- **Long Life Components:** Newly developed x-ray tube and detector are projected to last at least two years of typical plant operation.
- **XR75 Platform:** Products are easy to set up and operator-adjustable. The interface and electronics are common to Anritsu's other XR75 systems, giving users a shared experience across Anritsu's product lines.

Better Bone Detection






STANDARD FEATURES


- HD imaging w/beryllium tube
- IP69K washdown rating
- Sanitary design
- Longer life tube & detector
- Auto-learn product setup wizard
- Sealed sanitary belt
- Tool-free belt removal
- Image & reject logs
- 10+ software detection tools
- QUICCA capable
- Remote Support capable

Discover what you've been missing...™

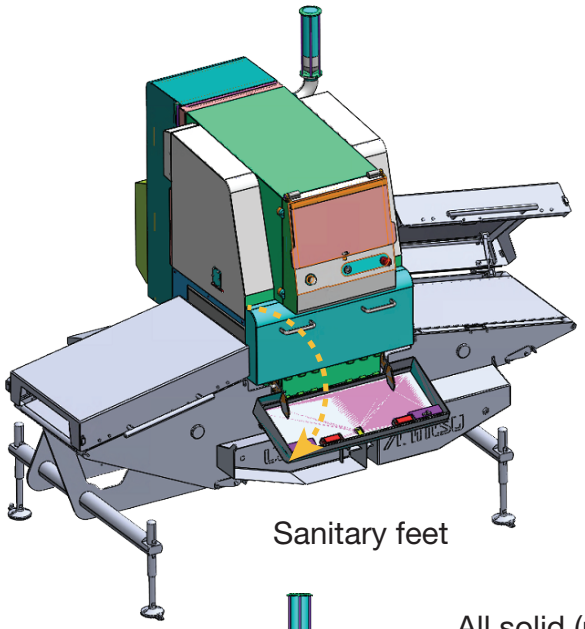

Sanitary feet


Tool-free
belt removal

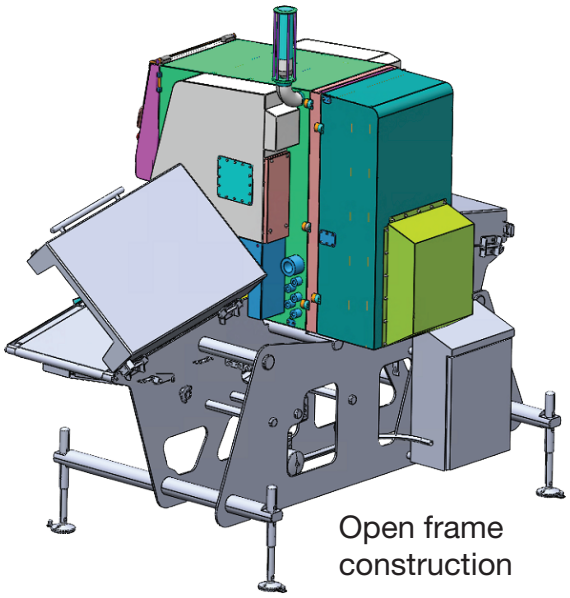



Open frame
construction

All solid (no tubular) members

Angled surfaces

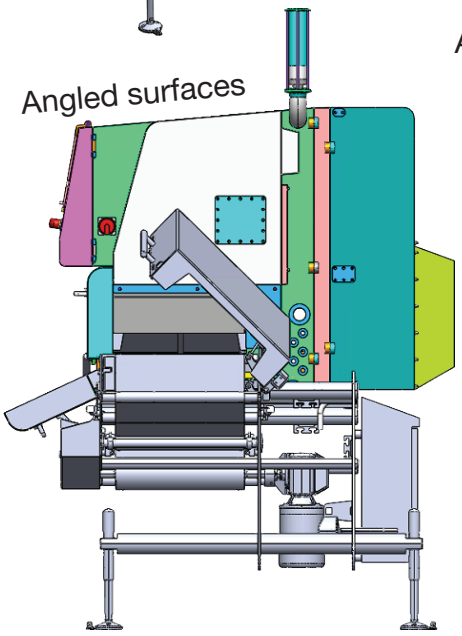


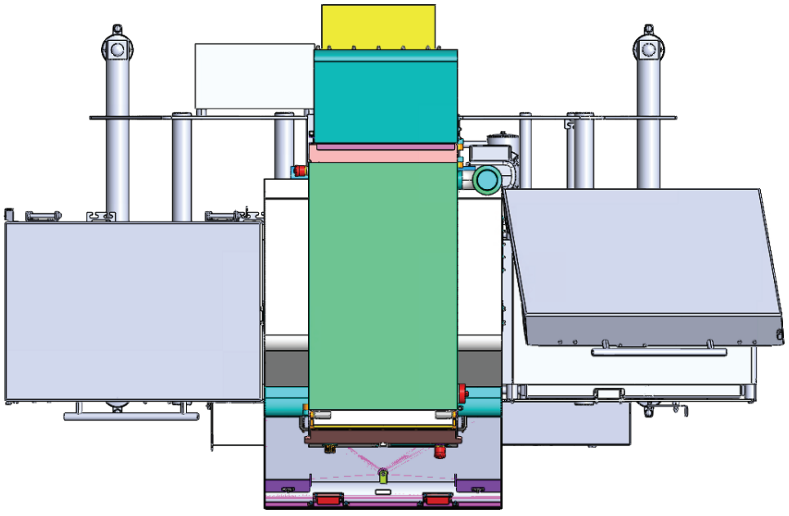

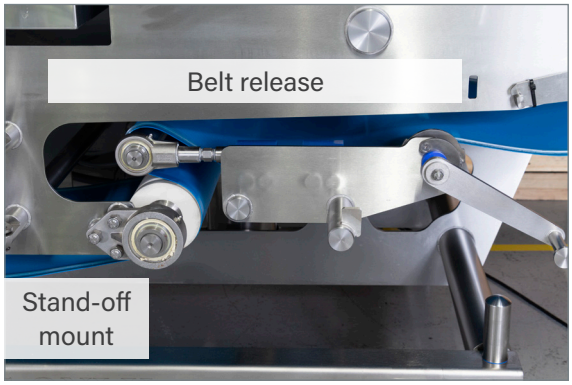

Belt release

Stand-off
mount

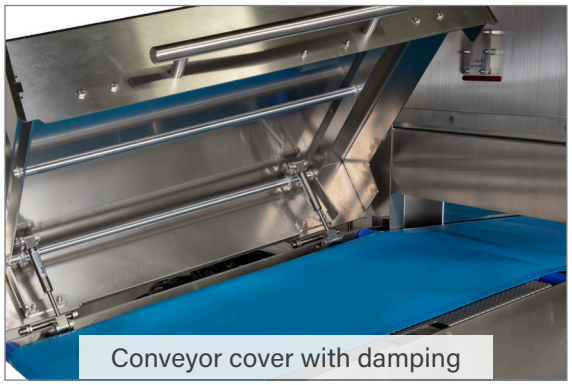


Conveyor cover with damping



Stack light
cage

Anritsu
Advancing beyond

Anritsu - Product Inspection
701 Innovation Dr., Ste. A | Elk Grove Village, IL 60007
+1-847-419-9729(XRAY) | anritsu.com/product-inspection

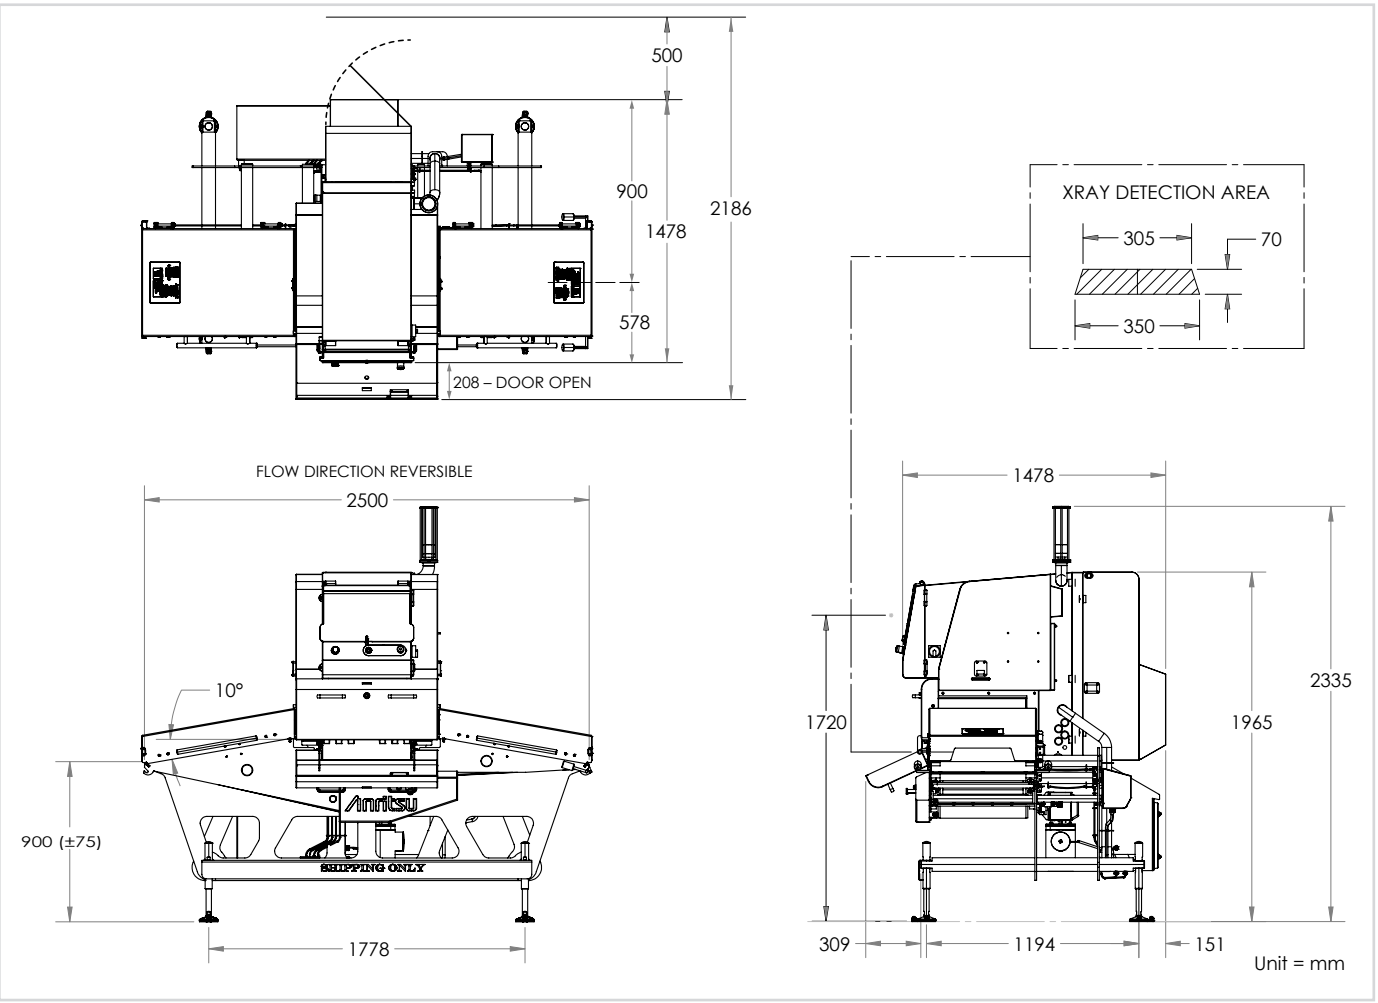

SPECIFICATIONS

Model	KXE7534CWHZE-300000
X-ray output	Tube voltage 25 to 80kV, Tube current 0.4 to 10.0mA, Output 10 to 350W
Product size	Maximum width: 350mm, Maximum height: 70mm
Dimensions	2500mm L x 1478 D x 2335 H
Belt width	482.6mm (19") *(Please note max product width above.)*
Belt speed [1]	15 to 50m/min
Power requirements [2]	200 to 240VAC, single phase, 50/60 Hz, 2.5kVA, inrush current 80A (typ.) (5ms or less)
Water/Pressure	Maximum water pressure 8MPa (equal to IP69K), maximum water temperature 40°C

1. Belt speed can be set individually per product recipe.
2. The inrush current shown above is for 200VAC. It varies with input voltage.

ABOUT ANRITSU

With more food inspection x-ray systems installed globally than any other provider, Anritsu offers the best combination of performance, reliability and price.

Founded in 1895, Anritsu is a billion-dollar global powerhouse based in Japan with a legacy of innovation and meticulous engineering in electronics, telecom and testing.

FULL SOLUTION PROVIDER

X-RAY SYSTEMS | CHECKWEIGHERS | METAL DETECTORS



Anritsu
Advancing beyond

Anritsu - Product Inspection
701 Innovation Dr., Ste. A | Elk Grove Village, IL 60007
+1-847-419-9729(XRAY) | anritsu.com/product-inspection