


## Network Master Pro MT1000A / Network Master Flex MT1100A Supported Bit Rates List

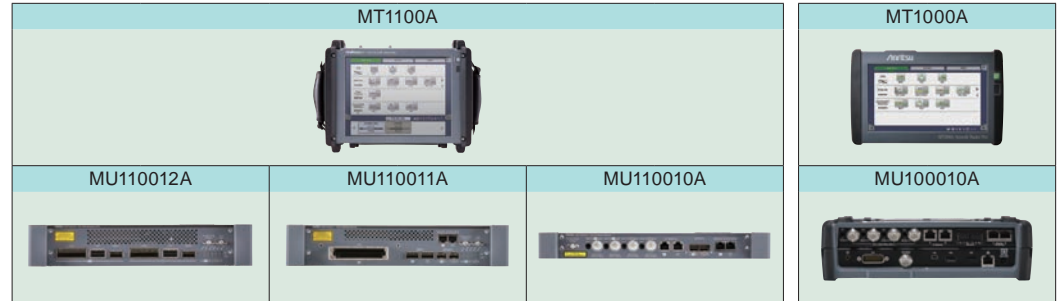

Supported Protocol	Physical Bit Rate (Mbps)	MU110012A		MU110011A		MU110010A		MU100010A	
		Physical Interface	OTN-Mapped Client	Physical Interface	OTN-Mapped Client	Physical Interface	OTN-Mapped Client	Physical Interface	OTN-Mapped Client
OTU4	111,809.974	✓		✓					
100GBASE-xx	103,125.000	✓	✓	✓	✓				
OTU3e2	44,583.356	✓		✓					
OTU3e1	44,570.975	✓		✓					
OTU3	43,018.414	✓		✓					
40G Ethernet	41,250.000	✓	✓	✓	✓				
STM-256/OC-768	39,813.120		✓	✓	✓				
OTU2f	11,317.642			✓		✓		✓	
OTU1f	11,270.089			✓		✓		✓	
OTU2e	11,095.728			✓		✓		✓	
OTU1e	11,049.107			✓		✓		✓	
OTU2	10,709.225			✓		✓		✓	
FC10G	10,518.750			✓	✓	✓	✓	✓	✓
10GBASE-xx	10,312.500		✓	✓	✓	✓	✓	✓	✓
CPRI Option 8	10,137.600		✓	✓	✓	✓		✓	
STM-64/OC-192	9,953.280		✓	✓	✓	✓	✓	✓	✓
CPRI Option 7	9,830.400		✓	✓	✓	✓	✓	✓	✓
FC8G	8,500.000		✓	✓	✓	✓	✓	✓	✓
CPRI Option 6	6,144.000		✓	✓	✓	✓	✓	✓	✓
OBSAI 8x	6,144.000			✓		✓		✓	
CPRI Option 5	4,915.200		✓	✓	✓	✓	✓	✓	✓
FC4G	4,250.000		✓	✓	✓	✓	✓	✓	✓
CPRI Option 4	3,072.000		✓	✓	✓	✓	✓	✓	✓
OBSAI 4x	3,072.000			✓		✓		✓	
OTU1	2,666.057			✓		✓		✓	
STM-16/OC-48	2,488.320		✓	✓	✓	✓	✓	✓	✓
CPRI Option 3	2,457.600		✓	✓	✓	✓	✓	✓	✓
FC2G	2,125.000		✓	✓	✓	✓	✓	✓	✓
OBSAI 2x	1,536.000			✓		✓		✓	
1000BASE-xx	1,250.000		✓	✓	✓	✓	✓	✓	✓
CPRI Option 2	1,228.800		✓	✓	✓	✓	✓	✓	✓
FC1G	1,062.500		✓	✓	✓	✓	✓	✓	✓
OBSAI 1x	768.000			✓		✓		✓	
STM-4/OC-12	622.080		✓	✓	✓	✓	✓	✓	✓
CPRI Option 1	614.400		✓	✓	✓	✓	✓	✓	✓
STM-1/OC-3	155.520		✓	✓	✓	✓	✓	✓	✓
100BASE-xx	125.000			✓		✓		✓	
E4	139.264					✓		✓	
DS3	44.736					✓		✓	
E3	34.368					✓		✓	
10BASE-xx	12.500			✓		✓		✓	
E1	2.048					✓		✓	
DS1	1.544					✓		✓	