

Digital Broadcast Analysis Options

For Anritsu MT8213E Cell Master and MS2712E/MS2713E Spectrum Master Instruments



Introduction


Anritsu's compact handheld Cell Master and Spectrum Master products can now be configured with a full suite of digital broadcast analysis options for both ISDB-T/ISDB-Tmm and DVB-T/H technologies and provide the broadcast professional the performance needed for the most demanding measurements in harsh RF and physical environments. Whether it is for spectrum monitoring, broadcast proofing, transmitter acceptance, or regulatory compliance, the Cell Master and Spectrum Master are ideal instruments for making fast and reliable measurements.

Cell Master MT8213E Base Station Analyzer Options


- MT8213E-0030: ISDB-T / ISDB-Tmm Digital Video Measurements
- MT8213E-0032: ISDB-T Measurements
- MT8213E-0079: ISDB-T BER Measurements
- MT8213E-0064: DVB-T/H Digital Video Measurements
- MT8213E-0057: DVB-T/H BER Measurements
- MT8213E-0078: DVB-T/H SFN Measurements

Spectrum Master MS2712E/MS2713E Spectrum Analyzer Options

- MS2712E-0030, MS2713E-0030: ISDB-T / ISDB-Tmm Digital Video Measurements
- MS2712E-0032, MS2713E-0032: ISDB-T Measurements
- MS2712E-0079, MS2713E-0079: ISDB-T BER Measurements
- MS2712E-0064, MS2713E-0064: DVB-T/H Digital Video Measurements
- MS2712E-0057, MS2713E-0057: DVB-T/H BER Measurements
- MS2712E-0078, MS2713E-0078: DVB-T/H SFN Measurements

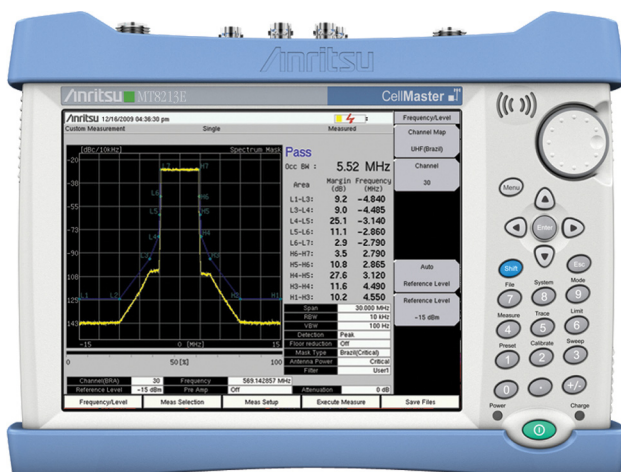

Cell Master™ MT8213E Base Station Analyzer
Compact Size: 273 mm x 199 mm x 91 mm Lightweight: 3.71 kg
For full specifications and functionality, refer to the
MT8213E Technical Data Sheet 11410-00485

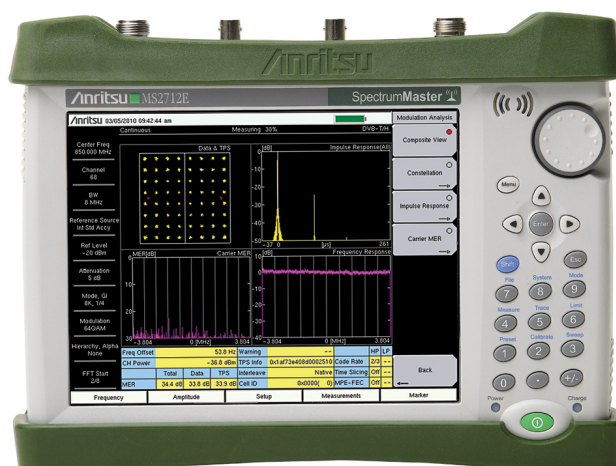

Spectrum Master™ MS2712E Spectrum Analyzer
Compact Size: 273 mm x 199 mm x 91 mm Lightweight: 3.45 kg
For full specifications and functionality, refer to the
MS2712/13E Technical Data Sheet 11410-00511

Table of Contents

Definitions.	3
ISDB-T/ISDB-Tmm Measurements (Options 30, 79).	4
ISDB-T/ISDB-Tmm Digital Video Measurements (Option 30)	6
ISDB-T BER Measurements (Option 79)	9
ISDB-T Single Frequency Network (SFN) Measurements (Option 32)	10
DVB-T/H Measurements (Options 64, 57, 78)	12
DVB-T/H Digital Video Measurements (Option 64).	13
DVB-T/H BER Measurements (Option 57)	16
DVB-T/H Single Frequency Network (SFN) Measurements (Options 78).	18
Digital Broadcast Analysis Options Ordering Information	20

Definitions

	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Warm-Up Time	After 10 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Over the 23 °C ± 5 °C temperature range.
Reference Signal	When using internal reference signal.
Typical Performance	Typical specifications that are not in parenthesis are not tested and not warranted. They are generally representative of characteristic performance. Typical specifications in parentheses () represent the mean value of measured units and do not include any guard-bands or uncertainties. They are not warranted.
Uncertainty	A coverage factor of x1 is applied to the measurement uncertainties to facilitate comparison with other industry handheld analyzers.
Calibration Cycle	Calibration is within the recommended 12 month period (residual specifications also require calibration kit calibration cycle adherence). All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com



ISDB-T/ISDB-Tmm Measurements (Options 30, 79)

Measurements		
ISDB-T RF (Option 30)	ISDB-T Signal Analysis (Option 30)	ISDB-T BER Analysis (Option 79)
Signal Power Channel Power Termination Voltage Open Terminal Voltage Field Strength Spectrum Monitor Channel Power Zone Center Channel Zone Center Frequency Spectrum Mask Mask (Standard A) Japan Mask (Standard B) Japan Mask (Critical) Brazil Mask (Sub-critical) Brazil Mask (Non-critical) Brazil Phase Noise Spurious Emissions	Constellation (w/zoom) Layer A, B, C, TMCC Sub-carrier MER Delay Profile (w/zoom) Frequency Response Measured Data Frequency Frequency Offset MER (Total, Layer A/B/C, TMCC, AC1) Modulation Type (Layer A/B/C) Mode, GI Sub-carrier MER w/marker Delay w/marker Frequency Response w/marker	Layer A, Layer B, Layer C BER and Error Count per Layer Before RS Before Viterbi PER and Error Count per Layer MPEG Bit Rate per Layer TMCC Information per Layer Modulation Code Rate Interleave Segments Channel Power Mode, GI Signal Sync Status ASI Out
ISDB-Tmm RF (Option 30)	ISDB-Tmm Signal Analysis (Option 30)	Does Not Apply
Signal Power Signal Level Termination Voltage Open Terminal Voltage Field Strength Spectrum Monitor Phase Noise	Constellation Total Layer A, B, C, TMCC (all w/zoom) Sub-carrier MER Delay Profile (w/zoom) Frequency Response Measured Data Frequency Frequency Error Clock Error MER (Total, Layer A/B/C, TMCC, AC1, Super Segment) Modulation Layer A/B/C (13-segment Super Segment Per Segment (1-segment Super Segment) Mode, GI Sub-carrier MER w/marker Delay w/marker Frequency Response w/marker	

Measurement Modes

Custom	User specified measurement and setup parameters
Easy (ISDB-T only)	User specified measurements. Some setup parameters are automatically set or detected
Batch	User specified measurements and channels for automatic measurement, and display and storage of results

Setup Parameters (ISDB-T)

Channel Map	UHF (Japan), UHF (Brazil), IF (37.15 MHz), None
Channel Setting Range	13 to 62 (Japan) Center Frequency = ((Channel number - 13) x 6 + 473.142857) MHz 14 to 69 (Brazil) Center Frequency = ((Channel number - 14) x 6 + 473.142857) MHz
Frequency Range	35 MHz to 806 MHz
Setting Resolution	1 Hz
Bandwidth	6 MHz, 8 MHz
Mode	Mode 2, Mode 3 Manual setting or setting by automatic detection
Guard Interval (GI)	1/4, 1/8, 1/16 Manual setting or setting by automatic detection
Modulation Scheme	QPSK, 16 QAM, 64 QAM Manual setting or setting by automatic detection
Spectrum Reverse	On, Off
Partial Reception	Recognized when Layer A segment count is 1
One-Seg (Not available in Option 32)	On: synchronizes with single segment transmission (Bandwidth 6 MHz only) Off: synchronizes with normal 13 segment signal
Maximum Level Setting	+20 dBm (Preamp Off), -10 dBm (Preamp On)
Reference Level Setting	-25 dBm to +20 dBm/5 dBm steps (Preamp Off), -50 dBm to -10 dBm/10 dB steps (Preamp On)



ISDB-T/ISDB-Tmm Measurements (Options 30, 79) (continued)

Setup Parameters (ISDB-Tmm)

Channel Map	ISDB-Tmm, ISDB-Tmm IF, None
Center Frequency Setting Range	ISDB-Tmm Center Frequency = $214.714285 + (0.428571 \times (n-16))$ MHz (n = 0 to 32) ISDB-Tmm IF Center Frequency = $37.15 - (0.428571 \times (n-16))$ MHz (n = 0 to 32) None Center Frequency = 35 MHz to 800 MHz
Setting Resolution 1 Hz	1 Hz
Mode	Mode 1, Mode 2, Mode 3
Guard Interval (GI)	1/4, 1/8, 1/16
TMCC Setup	Super Segment Number, Super Segment Type, Segment Number, Sub Channel, Demodulation Mode, Modulation Scheme
Super Segment Number	1, 3, 4, 5
Super Segment Type	13-segment, 1-segment
Segment Number	1 to 14 for 1-segment Super Segment
Sub Channel	0 to 41 for 1-segment Super Segment
Demodulation Mode	Standard, Advanced, Tx Optimized
Modulation Scheme	QPSK, 16QAM, 64QAM
Spectrum Reverse	On, Off
Maximum Level Setting	+20 dBm (Preamp Off), -10 dBm (Preamp On)
Reference Level Setting	-25 dBm to +20 dBm/5 dB steps (Preamp Off), -50 dBm to -10 dBm/10 dB steps (Preamp On)



ISDB-T/ISDB-Tmm Digital Video Measurements (Option 30)

Field Strength, Terminal Voltage, Channel Power, Signal Level (ISDB-T Signal, 1 Channel Input)

Input Level Range	+20 dBm to DANL (Preamp Off) -20 dBm to DANL (Preamp On)
Resolution	0.1 dB
Accuracy	Average count 10, VSWR ≤ 1.5 , 50 Ω ± 2.0 dB, typical (+20 dBm to -10 dBm), ± 2.0 dB (-10 dBm to -60 dBm) (Preamp Off) ± 2.0 dB (-10 dBm to -84 dBm) (Preamp On)
Displayed Average Noise Level (DANL)	RF input 50 Ω terminated, Average count 50, +20 °C to +30 °C, 5.6 MHz bandwidth ≤ -70 dBm (Preamp Off) ≤ -90 dBm (Preamp On)
Unit	dBm, dB μ V, dB μ V(emf), dB μ V/m
Antenna Correction Table	Antenna level correction data table for measuring field strength save in instrument
Bandwidth Setting	Auto (determined by TMCC), 33/13/1 segment (ISDB-Tmm only)
Single Segment Target	0 to 32 (ISDB-Tmm only)
Impedance	50 Ω , 75 Ω (requires 12N50-75B, 50 Ω to 75 Ω matching pad)
Measurement Mode	Single, Continuous, Average, Moving average, Max hold, Average count 1 to 100

Spectrum Monitor

Horizontal Display Range	1, 3, 5, 11, 31, 51 channels (ISDB-T), 18 MHz span (ISDB-Tmm)
Vertical Display Range	100 dB between -150 dBm to +20 dBm
Channel Power Measurement	Channel Zone Marker measures channel power at RF In (ISDB-T only)
Resolution	0.1 dB
Measurement Mode	Single, Continuous

Modulation Analysis (ISDB-T Signal, 1 Channel Input)

Frequency Lock Range	± 90 kHz
Input Range	+20 dBm to (DANL + 20) dBm (Preamp Off) -20 dBm to (DANL + 20) dBm (Preamp On)
Displayed MER	Total, Layer A, Layer B, Layer C, TMCC, AC1 (ISDB-T and 13-segment super segments in ISDB-Tmm) Super Segment 1 to 5 (ISDB-Tmm) All Segments (1-segment Super Segment in ISDB-Tmm)
Resolution	0.1 dB
Residual MER	Total, Mode 3, GI 1/8, 64 QAM, Average count 10, internal attenuator 0 dB ≥ 42 dB, typical (Preamp Off, Reference level -20 dBm, -20 dBm input) ≥ 37 dB, typical (Preamp On, Reference level -50 dBm, -50 dBm input)
Interference Wave Effect	Total, Mode 3, GI 1/8, 64 QAM, Average count 10, ± 2 channels (± 12 MHz), 0 dBm interference wave ≥ 30 dB, typical (Preamp Off, -35 dBm input)
Constellation Display	All (ISDB-Tmm), Layer A, Layer B, Layer C, TMCC
Sub-carrier MER Display Range	± 2.785 MHz from center frequency (Bandwidth 6 MHz) (ISDB-T) ± 3.714 MHz from center frequency (Bandwidth 8 MHz) (ISDB-T) Sub-carrier number from 0 to maximum 14256 dependent on number of active segments (ISDB-Tmm)
Sub-carrier MER Marker	Reads sub-carrier number, offset frequency, MER
Frequency	Measures center frequency of modulated signal
Unit	Hz, ppm
Clock Error	Measures FFT clock error (ISDB-Tmm only)
Unit	Hz, ppm
Frequency Resolution	0.1 Hz
Frequency Accuracy	-20 dBm, MER > 40 dB, Preamp Off, Average count 10, Mode 3, GI 1/8, 64 QAM $\pm ((\text{measurement frequency} \times \text{reference frequency accuracy}) \pm 0.3)$ Hz (Refer to the product technical data sheet for the reference frequency accuracy.)
Measurement Mode	Single, Continuous, Average, Moving average, Overwrite (Constellation only) Average count 1 to 100

Delay Profile (ISDB-T Signal, 1 Channel Input)

Frequency Lock Range	± 90 kHz
Input Range	+20 dBm to (DANL + 20) dBm (Preamp Off) -20 dBm to (DANL + 20) dBm (Preamp On)
Horizontal Axis	Delay Time, maximum level signal displayed at 0 μ s
Display Range	Full display: $-1/24$ of valid symbol length to $7/24$ of valid symbol length Zoom display: arbitrary 24.6 μ s width within full display range
Valid Range	0.12 μ s to Guard Interval length (Bandwidth 6 MHz) (ISDB-T and ISDB-Tmm) 0.09 μ s to Guard Interval length (Bandwidth 8 MHz) (ISDB-T only)
Resolution	0.12 μ s (Bandwidth 6 MHz) (ISDB-T and ISDB-Tmm) 0.09 μ s (Bandwidth 8 MHz) (ISDB-T only)
Vertical Axis	Relative level, displays maximum level signal at 0 dB
Vertical Axis Display Range	5 dB, 10 dB, 25 dB, 50 dB selectable
Display Resolution	0.1 dB
Marker	Reads Delay time, Distance and Relative level from 0 μ s response
Measurement Mode	Single, Continuous, Average, Moving average, Average count 1 to 100


ISDB-T/ISDB-Tmm Digital Video Measurements (Option 30) (continued)

Frequency Response (ISDB-T Signal, 1 Channel Input)

Frequency Lock Range	±90 kHz
Input Range	+20 dBm to (DANL + 20) dBm (Preamp Off) -20 dBm to (DANL + 20) dBm (Preamp On)
Horizontal Axis	Frequency, displays center frequency as 0 MHz
Display Range	±2.785 MHz (Bandwidth 6 MHz) ±3.714 MHz (Bandwidth 8 MHz) (ISDB-T only)
Valid Range	±2.74 MHz (Mode 2), ±2.76 MHz (Mode 3) (Bandwidth 6 MHz)
Resolution	1 kHz
Vertical Axis	Relative level, displays average value of frequency response as 0 dB
Vertical Axis Display Range	5 dB, 10 dB, 25 dB, 50 dB selectable
Display Resolution	0.1 dB
Measurement Mode	Single, Continuous, Average, Moving average, Average count 1 to 100

Spectrum Mask (ISDB-T Signal, 1 Channel Input)

Input Level Range	+20 dBm to -15 dBm
Resolution Bandwidth	10 kHz
Video Bandwidth	300 Hz
Detection	Peak
Selectable Masks	Channel Map UHF (Japan) (ISDB-T only) Standard A (according to ARIB STD-B31) (ISDB-T only) Standard B (according to ARIB STD-B31) (ISDB-T only) Channel Map UHF (Brazil) (ISDB-T only) Critical (according to ABNT NBR 15601) (ISDB-T only) Sub-critical (according to ABNT NBR 15601) (ISDB-T only) Non-critical (according to ABNT NBR 15601) (ISDB-T only) ARIB STD-B46 (ISDB-Tmm only)
Measurement Points (ISDB-T only)	4001 (Standard A) 6001 (Standard B, Critical, Sub-critical, Non-critical)
Pass/Fail Judgement	The measured waveform is compared with the standard mask. Pass or Fail indicated accordingly
Margin	Displays frequency and minimum value of the difference between the measured waveform and mask standard line between each break point of the mask standard line
Floor Reduction	Deducts the floor noise from the measured spectrum waveform and displays the result
Antenna Power	For Standard B only Settable when antenna power is >0.025 W and ≤2.5 W Mask automatically adjusted for set antenna power For antenna power ≤0.025 W, standard line "≤0.025 W" is displayed For antenna power >2.5 W, standard line ">2.5 W" is displayed For antenna power = 0.25 W, standard line "0.25 W" is displayed
Filter Selection	Default, User 1, User 2, User 3 (Critical, Sub-critical, Non-critical only) User memories can be used to download specific transmitter output filter characteristics to compensate measured data
Selectable Displayed Trace	Filter Data, Corrected Data, Uncorrected Data (Critical, Sub-critical, Non-critical only)
Marker Function	Relative level and offset frequency of measured waveform
Occupied Frequency Bandwidth	Displays the frequency bandwidth in which 99 % of the total power is received
Resolution	0.01 MHz
Measurement Mode	Single



ISDB-T/ISDB-Tmm Digital Video Measurements (Option 30) (continued)

Phase Noise (ISDB-T Signal, 1 Channel Input)

Frequency Lock Range	±2 kHz
Input Level Range	+20 dBm to -10 dBm
Horizontal Axis Range	100 kHz to 6 MHz
Vertical Axis Range	-40 dBc/Hz to -140 dBc/Hz
Marker	Frequency, phase noise, integrated phase noise between two arbitrary points
Fixed Point Display	Displays phase noise at offset frequencies 1 kHz, 10 kHz, 100 kHz
	Displays integrated phase noise from 100 Hz to 6 MHz (ISDB-T), 100 Hz to 16 MHz (ISDB-Tmm)
Residual Phase Noise	-10 dBm input power, Average count 10
	-100 dBc/Hz (10 kHz offset)
	-105 dBc/Hz (100 kHz offset)
	-115 dBc/Hz (1 MHz offset)
Frequency Accuracy	-10 dBm input power, Average count 10
	$\pm((\text{measurement frequency} \times \text{reference frequency accuracy}) \pm 0.20) \text{ Hz}$
	(Refer to the product technical data sheet for the reference frequency accuracy.)
Frequency Resolution	0.01 Hz
Measurement Mode	Single, Continuous, Average, Average count 1 to 100
Vertical Axis Display Range	5 dB, 10 dB, 25 dB, 50 dB selectable
Display Resolution	0.1 dB
Marker	Delay time, Distance and Relative level read with marker function
Measurement Mode	Single, Continuous, Average, Moving average, Average count 1 to 100

Spurious Emissions (ISDB-T Signal, 1 Channel Input)

Input Level Range	+20 dBm to 0 dBm
Search Range	5 MHz to 5 x input signal frequency
Search Conditions	RBW 10 kHz (5 MHz to 30 MHz), 100 kHz (30 MHz to 1 GHz), 1 MHz (1 GHz to 4 GHz)
	Detection mode RMS
Measurement Method	5 MHz to 1 GHz, and > 1 GHz (input signal frequency x 5)
	High-pass filter required to attenuate input signal for measuring >1 GHz
Results Display	Frequency, Absolute level, Relative level, RBW and Detection mode for five spurious
Measurement Mode	Single

Batch Measurement Mode

Function	Specifies measurement items and channels for continuous measurement and saves each measurement result to JPEG file
Channel Setting Range (ISDB-T only)	UHF (Japan) 13 to 62
	UHF (Brazil) 14 to 69
Maximum Number of Channels (ISDB-T only)	10
Segment Setting Range (ISDB-Tmm only)	0 to 32
Maximum Number of Segments (ISDB-Tmm only)	1
Measured Item	Field strength, Channel power, MER, Frequency error, Spectrum mask evaluation, Occupied frequency bandwidth



ISDB-T BER Measurements (Option 79)

These specifications become effective when Option 79 is installed in the Cell Master or Spectrum Master. Option 79 can be used only when Option 30 is also installed. Operating temperature when Option 79 is installed is restricted to 0 °C to 40 °C

BER

Hierarchy Layers	Layer A, Layer B, Layer C
BER Measurement Display per Layer	Rate: x.xxE-yy x.xx: Mantissa, resolution 0.01 yy: Exponent, resolution 1 Before Viterbi, Before RS Error Count: Displays total number of errors Before Viterbi, Before RS
PER Measurement Display per Layer	Rate: x.xxE-yy x.xx: Mantissa, resolution 0.01 yy: Exponent, resolution 1 Error Count: Displays total number of packet errors
TMCC Information Display per Layer	Modulation: QPSK, 16 QAM, 64 QAM Code Rate: 1/2, 2/3, 3/4, 5/6, 7/8 Interleave: 0, 4, 8, 16 (Mode 1); 0, 2, 4, 8 (Mode 2); 0, 1, 2, 4 (Mode 3) Number of segments: 1 to 13. If layer is unused, *** is displayed
MPEG TS Bit Rate per Layer	Unit: kbps or Mbps Resolution: 2 decimal places
Channel Power Indication	Current, Maximum, Moving average, Minimum Unit: dBm Resolution: 0.1 dB
Real Time Monitor Indication	Signal Sync: Locked, Unlocked Mode: 1, 2, 3 GI: 1/4, 1/8, 1/16, 1/32
Elapsed Measurement Time Indication	hh: mm: ss, hh: hour, mm: minute, ss: second
Spectrum Reverse	On, Off Selection not available in Easy mode: defaults to Off
ASI Output Connector	BNC-J 75 Ω
ASI Output Level	800 mV _{p-p} (nominal)
Measurement Mode	Continuous: Measurement of up to 10 ¹² bits unless measurement is manually stopped. Measurement stops automatically after 10 ¹² bits measured



ISDB-T Single Frequency Network (SFN) Measurements (Option 32)

Field Strength, Terminal Voltage, Channel Power (ISDB-T Signal, 1 Channel Input)

Input Level Range	+20 dBm to DANL (Preamp Off)–20 dBm to DANL (Preamp On)
Resolution	0.1 dB
Accuracy	Average count 10, VSWR ≤ 1.5 , 50 Ω ± 2.0 dB, typical (+20 dBm to –10 dBm) ± 2.0 dB (–10 dBm to –60 dBm) (Preamp Off) ± 2.0 dB (–10 dBm to –84 dBm) (Preamp On)
Displayed Average Noise Level (DANL)	RF input 50 Ω terminated, Average count 50, +20 °C to +30 °C, 5.6 MHz bandwidth ≤ -70 dBm (Preamp Off) ≤ -90 dBm (Preamp On)
Unit	dBm, dB μ V, dB μ V(emf), dB μ V/m
Antenna Correction Table	Antenna level correction data table for measuring field strength saved in instrument
Impedance	50 Ω , 75 Ω (requires 12N50-75B, 50 Ω to 75 Ω matching pad)
Measurement Mode	Single, Continuous

Delay Profile (ISDB-T Signal, 1 Channel Input)

Frequency Lock Range	± 90 kHz
Input Range	+20 dBm to (DANL + 10) dBm (Preamp Off) –20 dBm to (DANL + 10) dBm (Preamp On)
Horizontal Axis	Delay Time, maximum level signal displayed at 0 μ s
Display Range	Full display: ± 1008 μ s Zoom display: arbitrary 74 μ s width within full display range
Resolution	0.12 μ s
Vertical Axis	Relative level, displays maximum level signal at 0 dB
Vertical Axis Display Range	5 dB, 10 dB, 20 dB, 40 dB selectable
Resolution	0.1 dB
Marker	Reads Delay time, Relative level (DU ratio), absolute power and either field strength (dB μ V/m) or termination voltage (dB μ V)
Marker Mode	Main wave to center of zoom, path wave to center of zoom, peak search When Active Marker on Zoom graph Normal: Reads 1-point marker Zone: Reads the maximum value within the 1/10 width zone marker
Measurement Mode	Single, Continuous

Delay Profile: Path Level Estimation

Main Wave Level Accuracy	Mode 3, GI 1/8, VSWR ≤ 1.5 , 50 Ω
2 Wave Model ¹	± 2.5 dB, typical (–10 to –55 dBm, Preamp Off) ± 2.5 dB, typical (–20 to –79 dBm, Preamp On)
3 Wave Model ^{2,3}	± 2.5 dB, typical (–10 to –55 dBm, Preamp Off) ± 2.5 dB, typical (–20 to –79 dBm, Preamp On)
Delayed Wave Level Accuracy	Mode 3, GI 1/8, VSWR ≤ 1.5 , 50 Ω
2 Wave Model ⁴	± 2.5 dB, typical (–10 to –55 dBm, Preamp Off) ± 2.5 dB, typical (–20 to –79 dBm, Preamp On)
3 Wave Model ^{5,3}	± 2.5 dB, typical (–10 to –55 dBm, Preamp Off) ± 2.5 dB, typical (–20 to –79 dBm, Preamp On)
DU ratio Accuracy	Mode 3, GI 1/8, VSWR ≤ 1.5 , 50 Ω
2 Wave Model ⁴	± 1.0 dB, typical (–10 to –55 dBm, Preamp Off) ± 1.0 dB, typical (–20 to –70 dBm, Preamp On)
3 Wave Model ^{5,3}	± 1.0 dB, typical (–10 to –55 dBm, Preamp Off) ± 1.0 dB, typical (–20 to –70 dBm, Preamp On)
Main Wave Level Accuracy with Interference ⁶	± 2.5 dB, typical (–35 dBm, Preamp Off) (Mode 3, GI 1/8, 64 QAM, Reference level –25 dBm, ± 2 channels from desired signal, 0 dBm CW interfering wave)
Sidelobe Suppression	Automatically suppresses the sidelobe centered on the main wave

1. Time difference between main and delayed wave is 5 μ s to 1000 μ s, DU ratio is 3 dB or more.

2. Time difference between main and delayed wave is 5 μ s to 500 μ s, DU ratio is 6 dB or more.

3. When main wave is set to 0 μ s

– Delay time (absolute value) of one delayed wave is different from that of the other by 2 μ s or more.

– When delay time difference between delayed waves is different from delay time (absolute value) by 2 μ s or more.

4. Time difference between main and delayed wave is 5 μ s to 1000 μ s, DU ratio is 3 dB to 20 dB.

5. Time difference between main and delayed wave is 5 μ s to 500 μ s, DU ratio is 6 dB.

6. Time difference between main and delayed wave is 5 μ s to 1000 μ s and DU ratio is 3 dB or more with 2-wave model.

**ISDB-T Single Frequency Network (SFN) Measurements (Option 32)** (continued)**In-band Spectrum**

Input Range	+20 dBm to DANL (Preamp Off) -20 dBm to DANL (Preamp On)
Horizontal Axis	Frequency, center frequency displayed as 0 MHz
Display Range	± 2.785 MHz
Valid Range	± 2.74 MHz (Mode 2), ± 2.76 MHz (Mode 3)
Display Resolution	1 kHz
Vertical Axis	Level, displays average value of frequency response as 0 dB
Vertical Axis Display Range	5 dB, 10 dB, 25 dB, 50 dB selectable
Display Resolution	0.1 dB
Marker	Reads marker frequency and relative level
Delta Marker	Reads relative level, distance and frequency difference
Measurement Mode	Single, Continuous



DVB-T/H Measurements (Options 64, 57, 78)

Measurements			
DVB-T/H RF (Option 30)	DVB-T/H Signal Analysis (Option 64)	DVB-T/H BER Analysis (Option 57)	DVB-T/H SFN Analysis (Option 78)
Signal Power Channel Power Termination Voltage Open Terminal Voltage Field Strength Spectrum Monitor Channel Power Zone Center Channel Zone Center Frequency Shoulder Attenuation Channel Power Zone Center Channel Zone Center Frequency Lower Shoulder Attenuation Upper Shoulder Attenuation	Composite or Individual Views Constellation Impulse Response (w/zoom) Carrier MER (w/zoom) Freq Response (composite view only) Measured Data Mode, GI Modulation Hierarchy Freq Offset Channel Power MER (Total/Data/TPS) TPS Warning Message TPS Info Interleave Type Cell ID Code Rate (HP/LP) Time Slicing (HP/LP) MPE-FEC (HP/LP)	BER Before RS Before Viterbi PER (Packet) Channel Power MER (Quick) Bit Rate TPS Info Length Indicator Mode, GI Modulation Hierarchy Interleave type Cell ID Code Rate Time Slicing MPE-FEC TPS Warning Message ASI Out	Impulse Response (w/zoom) In-band Spectrum Measured Data Channel Power Delay DU ratio Power Field Strength

Setup Parameters

Frequency Range	Specified: 30 MHz to 990 MHz when Channel Map is None Tunable: 30 MHz to 2400 MHz
Setting Resolution	1 Hz
Channel Map	UHF (Australia), UHF (Europe), VHF (Europe), None
Channel	28 to 69 UHF (Australia) Center frequency = ((channel number - 28) x 7 + 529.5) MHz 21 to 69 UHF (Europe) Center frequency = ((channel number - 21) x 8 + 474) MHz 5 to 12 VHF (Europe) Center Frequency = ((channel number - 5) x 7 + 177.5) MHz
Channel Frequency Offset	±166.666 kHz, ±333.333 kHz, ±499.999 kHz, None
Bandwidth	5 MHz, 6 MHz, 7 MHz, 8 MHz (BER measurements not available at 5 MHz and 7 MHz bandwidth)
Mode	2K, 4K, 8K Manual setting or setting by automatic detection
Guard Interval (GI)	1/4, 1/8, 1/16, 1/32 Manual setting or setting by automatic detection
Modulation Scheme	QPSK, 16 QAM, 64 QAM Manual setting or setting by automatic detection
Hierarchy	None, α=1, 2, 4 Manual setting or setting by automatic detection
Spectrum Reverse	On, Off
Maximum Input Level	+20 dBm (Preamp Off) -10 dBm (Preamp On)
Reference Level Setting	-25 dBm to +20 dBm/5 dB steps (Preamp Off) -50 dBm to -10 dBm/10 dB steps (Preamp On)



DVB-T/H Digital Video Measurements (Option 64)

Field Strength, Terminal Voltage, Channel Power (DVB-T/H Signal, 1 Channel Input)

Input Level Range	+20 dBm to DANL (Preamp Off) -20 dBm to DANL (Preamp On)
Resolution	0.1 dB
Accuracy	Channel Map UHF (Europe), Channel 21 to 69, Average count 10, VSWR ≤ 1.5 , 50 Ω ± 2.0 dB, typical (+20 dBm to -10 dBm) ± 2.0 dB (-10 dBm to -60 dBm) (Preamp Off) ± 2.0 dB (-10 dBm to -84 dBm) (Preamp On)
Displayed Average Noise Level (DANL)	Channel Map UHF (Europe), Channel 21 to 69, Bandwidth 8 MHz, RF input 50 Ω terminated, Average count 50, +20 $^{\circ}$ C to +30 $^{\circ}$ C ≤ -69 dBm (Preamp Off) ≤ -89 dBm (Preamp On)
Unit	dBm, dB μ V, dB μ V(emf), dB μ V/m
Antenna Correction Table	Antenna level correction data table for measuring field strength saved in instrument
Impedance	50 Ω , 75 Ω (requires 12N50-75B, 50 Ω to 75 Ω matching pad)
Measurement Mode	Single, Continuous, Average, Moving average, Max hold, Average count 1 to 100

Spectrum Monitor

Horizontal Display Range	1, 3, 5, 11, 31, 51 channels
Vertical Display Range	100 dB between -150 dBm to 20 dBm
Channel Power	Channel Zone Marker measures channel power at RF In
Channel Power Resolution	0.1 dB
Measurement Mode	Single, Continuous

Shoulder Attenuation (DVB-T/H Signal, 1 Channel Input)

Vertical Display Range	100 dB between -150 dBm to 20 dBm
Upper/Lower Shoulder Attenuation	Measured and displayed according to ETSI TR 101 290
Shoulder Attenuation Resolution	0.1 dB
Channel Power	Channel Zone Marker measures channel power at RF In
Channel Power Resolution	0.1 dB
Measurement Mode	Single, Continuous



DVB-T/H Digital Video Measurements (Option 64) (continued)

Modulation Analysis (DVB-T/H Signal, 1 Channel Input)

Frequency Lock Range	±90 kHz
Input Level Range	+20 dBm to (DANL + 20) dBm (Preamp Off) -20 dBm to (DANL + 20) dBm (Preamp On)
Selectable Measurement Views	Composite (comprises Constellation, Impulse Response, Carrier MER, Frequency Response) Individual (Constellation, Impulse Response or Carrier MER)
Center Frequency Offset Accuracy	-20 dBm, MER >40 dB, Preamp Off, Average count 10, Channel Map UHF (Europe), Channel 21 to 69, Mode 8K, GI 1/8, 64 QAM, Hierarchy None $\pm((\text{measurement frequency} \times \text{reference frequency accuracy}) \pm 0.3) \text{ Hz}$ (Refer to the product technical data sheet for the reference frequency accuracy.)
Frequency Offset Resolution	0.1 Hz
Channel Power	Measures channel power at RF In
Channel Power Resolution	0.1 dB
MER Measurement	Total, Data, TPS
MER Resolution	0.1 dB
Residual MER	Total, Average count 10, Channel Map UHF (Europe), Channel 21 to 69, Mode 8K, GI 1/8, 64 QAM, Hierarchy None $\geq 42 \text{ dB}$, typical (Preamp Off, Reference Level -20 dBm, -20 dBm input) $\geq 37 \text{ dB}$, typical (Preamp On, Reference Level -50 dBm, -50 dBm input)
Interference Wave Effect	Total, Average count 10, Channel Map UHF (Europe), Channel 21 to 69, Mode 8K, GI 1/8, 64 QAM, Hierarchy None, ± 2 channels, 0 dBm interference wave $\geq 30 \text{ dB}$, typical (Preamp Off, -35 dBm input)
TPS Information	68 bit TPS data showed in hexadecimal, TPS warning messages
Inner Interleave	Native, In-depth
Cell ID	16 bits displayed in hexadecimal and decimal
Code Rate	HP, LP
Time Slicing	Off, On, HP and LP in hierarchical mode
MPE-FEC	Off, On, HP and LP in hierarchical mode
Constellation Display	Data, TPS
Symbol Decision Annotation	On, Off
Measurement Mode	Single, Continuous, Average, Moving average, Average count 1 to 100


DVB-T/H Digital Video Measurements (Option 64) (continued)

Impulse Response (DVB-T/H Signal, 1 Channel Input)

Frequency Lock Range	±90 kHz
Input Range	+20 dBm to (DANL + 20) dBm (Preamp Off) -20 dBm to (DANL + 20) dBm (Preamp On)
Horizontal Axis	Delay time, maximum level signal displayed at 0 µs
Display Range	Full Display: -1/24 of valid symbol length to 7/24 of valid symbol length (0 µs position Left) -4/24 of valid symbol length to 4/24 of valid symbol length (0 µs position Center) -7/24 of valid symbol length to 1/24 of valid symbol length (0 µs position Right) Zoom Display: Arbitrary x µs width within full display range where x is the following 43.75 µs (Bandwidth 8 MHz) 50.00 µs (Bandwidth 7 MHz) 58.33 µs (Bandwidth 6 MHz) 70.00 µs (Bandwidth 5 MHz)
Valid Range	0 µs to Guard Interval length
Resolution	0.11 µs (Bandwidth 8 MHz) 0.13 µs (Bandwidth 7 MHz) 0.15 µs (Bandwidth 6 MHz) 0.18 µs (Bandwidth 5 MHz)
Vertical Axis	Relative level, displays maximum level signal at 0 dB
Vertical Axis Display Range	5 dB, 10 dB, 25 dB, 50 dB selectable
Resolution	0.1 dB
Marker	Reads Delay time, Distance and Relative level from 0 µs response
Delta Marker	Reads Delay time, Distance and Relative level from reference marker
Measurement Mode	Single, Continuous, Average, Moving average, Average count 1 to 100

Carrier MER (DVB-T/H Signal, 1 Channel Input)

Frequency Lock Range	±90 kHz
Input Range	+20 dBm to (DANL + 20) dBm (Preamp Off) -20 dBm to (DANL + 20) dBm (Preamp On)
Measurement Type	Speed, Accuracy
Horizontal Axis	Frequency offset from center frequency displayed at 0 MHz
Display Range	Full Display: ±3.804 (Bandwidth 8 MHz) ±3.328 (Bandwidth 7 MHz) ±2.853 (Bandwidth 6 MHz) ±2.377 (Bandwidth 5 MHz) Zoom Display: Arbitrary x MHz width within full display range where x is the following Bandwidth 8 MHz Mode 2K: ±0.893 MHz, Mode 4K: ±0.446 MHz, Mode 8K: ±0.223 MHz Bandwidth 7 MHz Mode 2K: ±0.781 MHz, Mode 4K: ±0.391 MHz, Mode 8K: ±0.195 MHz Bandwidth 6 MHz Mode 2K: ±0.670 MHz, Mode 4K: ±0.335 MHz, Mode 8K: ±0.167 MHz Bandwidth 5 MHz Mode 2K: ±0.558 MHz, Mode 4K: ±0.279 MHz, Mode 8K: ±0.140 MHz
Resolution	Carrier spacing (determined by Mode and Bandwidth)
Vertical Axis	MER
Vertical Axis Display Range	20 dB, 30 dB, 40 dB, 50 dB selectable
Resolution	0.1 dB
Marker	Reads carrier number, offset frequency, MER, peak search
Measurement Mode	Single, Continuous, Average, Moving average, Average count 1 to 100

Frequency Response (DVB-T/H Signal, 1 Channel Input)

Frequency Lock Range	±90 kHz
Input Range	+20 dBm to (DANL + 20) dBm (Preamp Off) -20 dBm to (DANL + 20) dBm (Preamp On)
Horizontal Axis	Frequency, displays center frequency as 0 MHz
Display Range	±3.804 (Bandwidth 8 MHz) ±3.328 (Bandwidth 7 MHz) ±2.853 (Bandwidth 6 MHz) ±2.377 (Bandwidth 5 MHz)
Vertical Axis	Relative level, displays average value of frequency response as 0 dB
Vertical Axis Display Range	-40 dB to +10 dB
Measurement Mode	Single, Continuous, Average, Moving average, Average count 1 to 100



DVB-T/H BER Measurements (Option 57)

These specifications become effective when Option 57 is installed in the Cell Master or Spectrum Master. It can be used only when Option 64 is also installed. Operating temperature when Option 57 is installed is restricted to 0 °C to 40 °C

BER

Bit Count Setting

	xE+yy
x	1 to 9, setting resolution 1
yy	6 to 12, setting resolution 1
Range	1E+6 to 1E+12

Service Type

In Service	BER measurement of normal in-service data traffic Simultaneous BER measurement Before Viterbi and Before RS error correction
Out of Service	BER measurement of a PRBS23 data sequence BER measurement point can be selected Before Viterbi, Before RS or After RS

Stream

HP, LP

Result Display

Current	Current measured value is continually updated
Last	Previous measured value is displayed while current measurement is being completed

TS Packet

Measurement point Before RS or After RS
1 + [187] + 16, 4 + [184] + 16 (Out of Service only)

Spectrum Reverse

On, Off

Real Time Monitor Indication

Signal Sync	Locked, Unlocked
TPS Parity	OK, NG
PRBS Sync (PRBS23)	Locked, Unlocked (Out of Service only)

TPS Information

Length Indicator	23, 31, 33
Mode	2K, 4K, 8K
GI	1/4, 1/8, 1/16, 1/32
Modulation	QPSK, 16 QAM, 64 QAM
Hierarchy	None, $\alpha = 1$, $\alpha = 2$, $\alpha = 4$
Inner Interleave	Native, In-depth
Cell ID	0 x 0~0 x FFFF (Hexadecimal, Decimal)
Code Rate	1/2, 2/3, 3/4, 5/6, 7/8 (HP, LP)
Time Slicing	On, Off (HP, LP)
MPE-FEC	On, Off (HP, LP) It is possible to display TPS warning message details

Elapsed Measurement Time Indication

hh: mm: ss: (hh: hour, mm: minute, ss: second)

BER Measurement Display

Rate	x.xx E-yy
x.xx	Mantissa, display resolution 0.01
yy	Exponent, display resolution 1
In Service	Before Viterbi, Before RS
Out of Service	Before Viterbi, Before RS, After RS
Error Count	Displays total number of errors

PER Measurement Display

Rate	x.xx E-yy
x.xx	Mantissa, display resolution 0.01
yy	Exponent, display resolution 1
Error Count	Displays total number of packet errors

MER

Quick	Instant, Maximum, Moving average, Minimum
MER Resolution	0.1 dB
Display Range	< 27 dB
Channel Power at RF In	Instant, Maximum, Moving average, Minimum
Channel Power Resolution	0.1 dB
ASI Output Connector	BNC-J 75 Ω
ASI Output Level	800 mV _{p-p} (nominal)
Measurement Mode	Single, Continuous



DVB-T/H Single Frequency Network (SFN) Measurements (Options 78)

Field Strength, Terminal Voltage, Channel Power (DVB-T/H Signal, 1 Channel Input)

Input Level Range	+20 dBm to DANL (Preamp Off)–20 dBm to DANL (Preamp On)
Resolution	0.1 dB
Accuracy	Channel Map UHF (Europe), Channel 21 to 69, Average count 10, VSWR ≤ 1.5 , 50 Ω ± 2.0 dB, typical (+20 dBm to –10 dBm) ± 2.0 dB (–10 dBm to –60 dBm) (Preamp Off) ± 2.0 dB (–10 dBm to –84 dBm) (Preamp On)
Displayed Average Noise Level (DANL)	Channel Map UHF (Europe), Channel 21 to 69, Bandwidth 8 MHz, RF input 50 Ω terminated, Average count 50, +20 °C to +30 °C ≤ -69 dBm (Preamp Off) ≤ -89 dBm (Preamp On)
Unit	dBm, dB μ V, dB μ V(emf), dB μ V/m
Antenna Correction Table	Antenna level correction data table for measuring field strength saved in instrument
Impedance	50 Ω , 75 Ω (requires 12N50-75B, 50 Ω to 75 Ω matching pad)
Measurement Mode	Single, Continuous

Impulse Response (DVB-T/H Signal, 1 Channel Input)

Frequency Lock Range	± 90 kHz
Input Range	+20 dBm to (DANL + 10) dBm (Preamp Off) –20 dBm to (DANL + 10) dBm (Preamp On)
Horizontal Axis	Delay time, maximum level signal displayed at 0 μ s

Display Range

Full Display	± 896 μ s (Bandwidth 8 MHz) ± 1024 μ s (Bandwidth 7 MHz) ± 1195 μ s (Bandwidth 6 MHz) ± 1434 μ s (Bandwidth 5 MHz)
Zoom Display	Arbitrary x μ s width within full display range where x is the following 66 μ s (Bandwidth 8 MHz) 75 μ s (Bandwidth 7 MHz) 87 μ s (Bandwidth 6 MHz) 105 μ s (Bandwidth 5 MHz)
Resolution	0.11 μ s (33 m) (Bandwidth 8 MHz) 0.13 μ s (37 m) (Bandwidth 7 MHz) 0.15 μ s (44 m) (Bandwidth 6 MHz) 0.18 μ s (52 m) (Bandwidth 5 MHz)
Vertical Axis	Relative level, displays maximum level signal at 0 dB
Vertical Axis Display Range	5 dB, 10 dB, 20 dB, 40 dB selectable
Resolution	0.1 dB
Marker	Reads Delay time, Relative level (DU ratio), absolute power and either field strength (dB μ V/m) or termination voltage (dB μ V)
Marker Mode	Main wave to center of zoom, path wave to center of zoom, peak search When Active Marker on Zoom graph Normal: Reads 1-point marker Zone: Reads the maximum value within the 1/10 width zone marker
Measurement Mode	Single, Continuous



DVB-T/H Single Frequency Network (SFN) Measurements (Options 78) (continued)

Impulse Response: Path Level Estimation

Main Wave Level Accuracy	
2 Wave Model ⁷	Mode 8K, GI 1/8, Bandwidth 8 MHz, VSWR \leq 1.5, 50 Ω ± 2.5 dB, typical (-10 to -55 dBm, Preamp Off) ± 2.5 dB, typical (-20 to -79 dBm, Preamp On)
3 Wave Model ^{8,9}	± 2.5 dB, typical (-10 to -55 dBm, Preamp Off) ± 2.5 dB, typical (-20 to -79 dBm, Preamp On)
Delayed Wave Level Accuracy	
2 Wave Model ¹⁰	Mode 8K, GI 1/8, Bandwidth 8 MHz, VSWR \leq 1.5, 50 Ω ± 2.5 dB, typical (-10 to -55 dBm, Preamp Off) ± 2.5 dB, typical (-20 to -79 dBm, Preamp On)
3 Wave Model ^{11,9}	± 2.5 dB, typical (-10 to -55 dBm, Preamp Off) ± 2.5 dB, typical (-20 to -79 dBm, Preamp On)
DU Ratio Accuracy	
2 Wave Model ¹⁰	Mode 8K, GI 1/8, Bandwidth 8 MHz, VSWR \leq 1.5, 50 Ω ± 1.0 dB, typical (-10 to -55 dBm, Preamp Off) ± 1.0 dB, typical (-20 to -70 dBm, Preamp On)
3 Wave Model ^{11,9}	± 1.0 dB, typical (-10 to -55 dBm, Preamp Off) ± 1.0 dB, typical (-20 to -70 dBm, Preamp On)
Main Wave Level Accuracy with Interference ¹²	Mode 8K, GI 1/8, 64 QAM, Reference level -25 dBm, ± 2 channels from signal, 0 dBm CW interfering wave ± 2.5 dB, typical (-35 dBm, Preamp Off)
Sidelobe Suppression	Automatically suppresses the sidelobe centered on the main wave

In-band Spectrum

Input Range	+20 dBm to DANL (Preamp Off) -20 dBm to DANL (Preamp On)
Horizontal Axis	Frequency, center frequency displayed as 0 MHz
Display Range	± 3.804 MHz (Bandwidth 8 MHz) ± 3.328 MHz (Bandwidth 7 MHz) ± 2.853 MHz (Bandwidth 6 MHz) ± 2.377 MHz (Bandwidth 5 MHz)
Display Resolution	1.116 kHz (Bandwidth 8 MHz) 0.977 kHz (Bandwidth 7 MHz) 0.837 kHz (Bandwidth 6 MHz) 0.698 kHz (Bandwidth 5 MHz)
Vertical Axis	Level, displays average value of frequency response as 0 dB
Vertical Axis Display Range	5 dB, 10 dB, 25 dB, 50 dB selectable
Display Resolution	0.1 dB
Marker	Reads marker frequency and relative level Delta Marker reads relative level, distance and frequency difference
Measurement Mode	Single, Continuous

7. Time difference between main and delayed wave is 5 μ s to 850 μ s, DU ratio is 3 dB or more

8. Time difference between main and delayed wave is 5 μ s to 420 μ s, DU ratio is 6 dB or more

9. When main wave is set to 0 μ s

- Delay time (absolute value) of one delayed wave is different from that of the other by 2 μ s or more

- When delay time difference between delayed waves is different from delay time (absolute value) by 2 μ s or more

10. Time difference between main and delayed wave is 5 μ s to 850 μ s, DU ratio is 3 dB to 20 dB

11. Time difference between main and delayed wave is 5 μ s to 420 μ s, DU ratio is 6 dB

12. Time difference between main and delayed wave is 5 μ s to 850 μ s and DU ratio is 3 dB or more with 2-wave model

Digital Broadcast Analysis Options Ordering Information

For full specifications and functionality of the Cell Master refer to the MT8213E Technical Data Sheet 11410-00485

MT8213E	Description
2 MHz to 6 GHz	Cable and Antenna Analyzer
9 kHz to 6 GHz	Spectrum Analyzer
10 MHz to 6 GHz	Power Meter

Options



MT8213E-0030	ISDB-T / ISDB-Tmm Digital Video Measurements
MT8213E-0079	ISDB-T BER Measurements (requires Option 30)
MT8213E-0032	ISDB-T SFN Measurements



MT8213E-0064	DVB-T/H Digital Video Measurements
MT8213E-0057	DVB-T/H BER Measurements (requires Option 64)
MT8213E-0078	DVB-T/H SFN Measurements

For full specifications and functionality of the Spectrum Master refer to the MS2712/13E Technical Data Sheet 11410-00511

MS2712E	MS2713E	Description
9 kHz to 4 GHz	9 kHz to 6 GHz	Spectrum Analyzer

Options

Options



MS2712E-0009	MS2713E-0009	20 MHz BW Demod
MS2712E-0030	MS2713E-0030	ISDB-T / ISDB-Tmm Digital Video Measurements (requires Option 9)
MS2712E-0079	MS2713E-0079	ISDB-T BER Measurements (requires Options 9 and 30)
MS2712E-0032	MS2713E-0032	ISDB-T SFN Measurements (requires Option 9)



MS2712E-0064	MS2713E-0064	DVB-T/H Digital Video Measurements (requires Option 9)
MS2712E-0057	MS2713E-0057	DVB-T/H BER Measurements (requires Options 9 and 64)
MS2712E-0078	MS2713E-0078	DVB-T/H SFN Measurements (requires Option 9)

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Americas Sales Company
450 Century Parkway, Suite 190
Allen, TX 75013, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.
700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP
Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Ltd.
200 Capability Green
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.
12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.
Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

List Revision Date: 20181114

• Sweden

Anritsu AB
Isafjordsgatan 32C
164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB
Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S
Torveporten 2
2500 Valby, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.
Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Moscow 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.
Representation Office in Spain
Paseo de la Castellana, 141. Planta 5
Edificio Cuzco IV
28046 Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates

Anritsu EMEA Ltd.
Dubai Liaison Office
902 Aurora Tower
P O Box: 500311 - Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited
6th Floor, Indique ETA, No.38/4
Adjacent to EMC2, Doddanekundi, Outer Ring Road
Bengaluru 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.
11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.
Room 2701-2705, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.
Unit 1006-7, 10/F.
Greenfield Tower, Concordia Plaza
No. 1 Science Museum Road
Tsim Sha Tsui East, Kowloon
Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016
Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Ltd.
5FL, 235 Pangyojeok-ro
Bundang-gu, Seongnam-si
Gyeonggi-do 13494, South Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.
Unit 20, 21-35 Ricketts Road
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.
7F, No. 316, Sec. 1, NeiHu Rd, Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817