

Features of MG3700A

MG3700A
Vector Signal Generator

MG3700A Vector Signal Generator

Product Introduction

< Features of MG3700A >



ANRITSU CORPORATION

Features

◆ Various communication systems

◆ Pre-installed Waveform Patterns:

W-CDMA/HSDPA, GSM/EDGE, PDC, PHS, CDMA2000 1x/1xEV-DO, AWGN, *Bluetooth*®, GPS, Digital Broadcast (ISDB-T/BS/CS/CATV), WLAN (IEEE802.11a/11b/11g)

◆ Optional Waveform Patterns:

- TD-SCDMA
- Public Radio System (RCR STD-39, ARIB STD-T61/T79/T86)
- DFS Radar Pattern [for TELEC/FCC]
- DFS(ETSI) Waveform Pattern
- ISDB-Tmm Waveform Pattern

◆ IQproducer (*: Software license is optional)

Waveform generation software

- W-CDMA - AWGN
- 3GPP-LTE/LTE-Advanced (FDD)*
- 3GPP-LTE/**LTE-Advanced (TDD)*** New
- HSDPA/HSUPA* - TDMA* (PDC, PHS, ARIB, etc.)
- CDMA2000 1xEV-DO* - Multi-carrier* - Mobile WiMAX*
- DVB-T/H* - Fading* - XG-PHS*
- WLAN 11ac/a/b/g/n/j/p* - TD-SCDMA*

◆ Arbitral Waveform Generator

IQ sample data files (in ASCII format) programmed by using general EDA (Electronic Design Automation) tools such as MATLAB® can also be converted to waveform patterns for MG3700A. And a custom-made waveform pattern file can be generated arbitrarily.

◆ Performance and functions

◆ Frequency Range 250 kHz to 6 GHz

- 250 kHz to 3 GHz (standard)
- 250 kHz to 6 GHz (option)

◆ Wide vector modulation bandwidth

- 120 MHz (Internal base band generator)
- 150 MHz (External IQ input)

◆ High level accuracy

- +/- 0.5 dB (Absolute level accuracy)
- +/- 0.2 dB typical (Linearity)

◆ Waveform addition function

Two signals, such as wanted signal + interfering signal or wanted signal + AWGN, can be added and outputted.

◆ Built-in BERT Analyzer.

- 1 kbps to 20 Mbps (standard)
- 100 bps to 120 Mbps (option)

◆ 40 Gbytes hard disk is built in.

◆ Large capacity baseband memory.

- 1 Gbytes = 256 Msamples (standard)
- 2 Gbytes = 512 Msamples (option)

◆ High speed waveform transmission by 100Base-TX LAN.

Various communication methods are supported

Pre-installed waveform patterns



W-CDMA, GSM/EDGE, PDC, PHS,
CDMA2000 1x/1xEV-DO, AWGN,
WLAN(IEEE802.11a/b/g),
Bluetooth®, GPS,
Digital Broadcast (ISDB-T/ BS/ CS/ CATV)

Anritsu product

Customer's item



Arbitrary IQ data
-C Language
-MATLAB
-Microwave Office
etc.



TD-SCDMA
Public Radio System
(RCR STD-39, ARIB STD-T61/T79/T86)
DFS Radar Pattern (for TELEC, FCC)
DFS (ETSI) Waveform Pattern
ISDB-Tmm Waveform Pattern



Standard:
W-CDMA, AWGN
Option:
TDMA, Multi-carrier, Mobile WiMAX,
3GPP LTE/LTE-Advanced (FDD),
3GPP LTE/**LTE-Advanced (TDD)**,
DVB-T/H, Fading, XG-PHS,
WLAN IEEE802.11ac/a/b/g/j/n/p
TD-SCDMA

New

Waveform Pattern (option)

Waveform patterns of fixed
parameter

IQproducer



**The waveform patterns
are arbitrarily generated.**

IQ sample data files (in ASCII format)
programmed by using general EDA
(Electronic Design Automation) tools
such as MATLAB® can also be
converted to waveform patterns for
MG3700A. And a custom-made
waveform pattern file can be
generated arbitrarily.

Free Generation of Waveform: EDA tool


Arbitrary waveform generation

For example, simulation result of MATLAB™ and the actual measurement result can be compared.

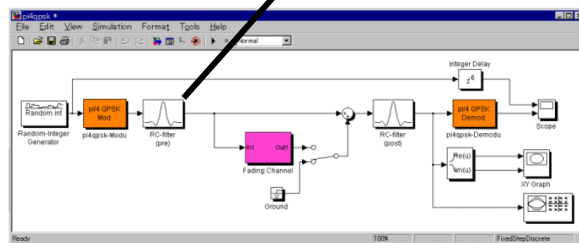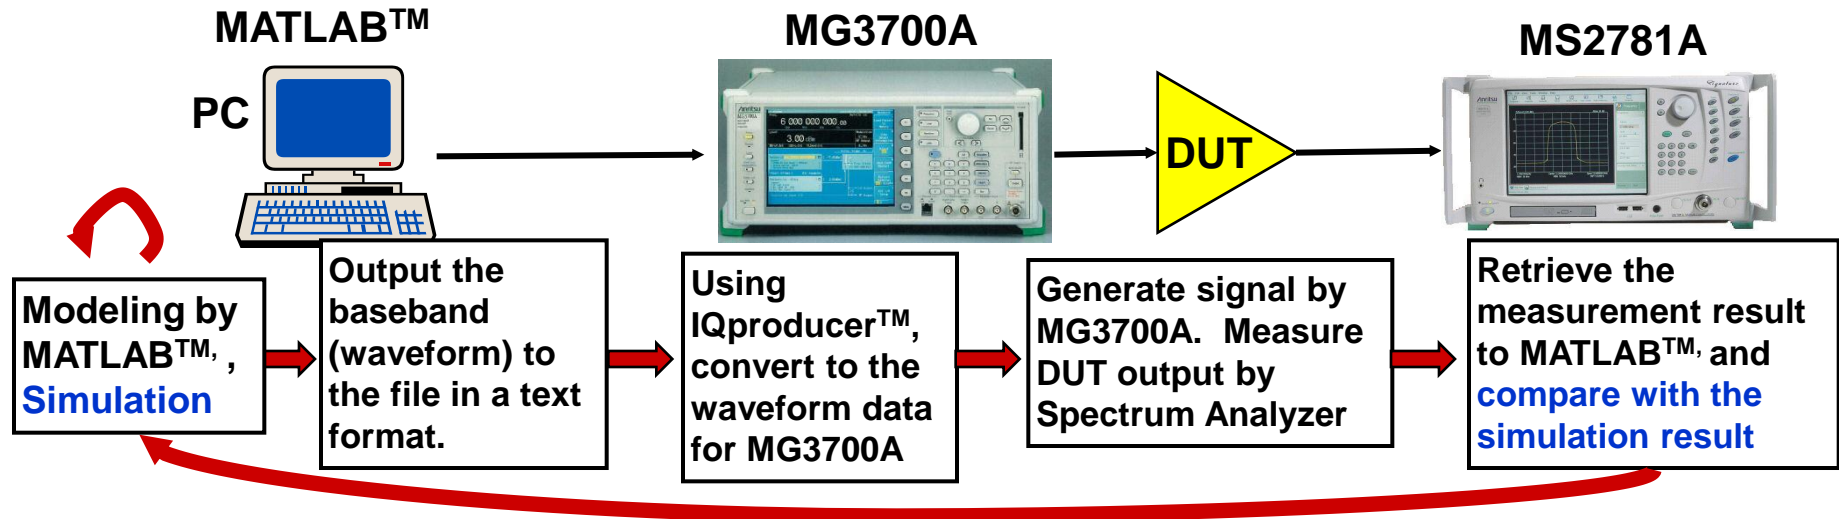


Simulation model in MATLAB

Change parameter while confirming the simulation result

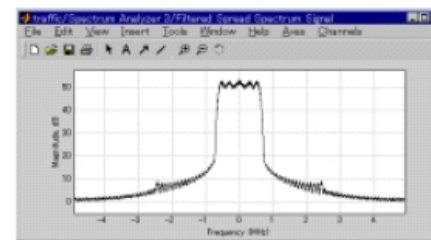


Simulation result

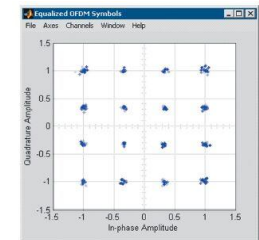

What is arbitrary signal generator (1/2)

Arbitrary waveform SG and real-time SG have different data creation methods in digital



● Arbitrary SG

- Arbitrary waveform SG generates a waveform pattern in the outside PC along the set parameter as a waveform pattern in advance.
- The generated waveform pattern is transferred to HDD of the SG body.
- Signal is output after waveform pattern transfer from HDD to the waveform memory and selection of the desired waveform pattern.

Merit

- Waveform pattern generation enables any signal output.
⇒Easy support for the future communication methods as well as various communication methods such as interfering signal.

Demerit

- Waveform length is limited by the waveform memory .
(Usually, endless output is produced by repeat of fixed waveform pattern.)

● Real-time SG

- When parameter is set on a screen of the SG body by user, the waveform pattern in line with parameter is generated inside SG to output signal.


Merit

- Better operability along with parameter setting/change.


Demerit

- Only the signals of systems supportable by hardware can be generated.
⇒Poor extensibility compared to arbitrary waveform SG


What is arbitrary signal generator (2/2)




•Arbitrary signal generator

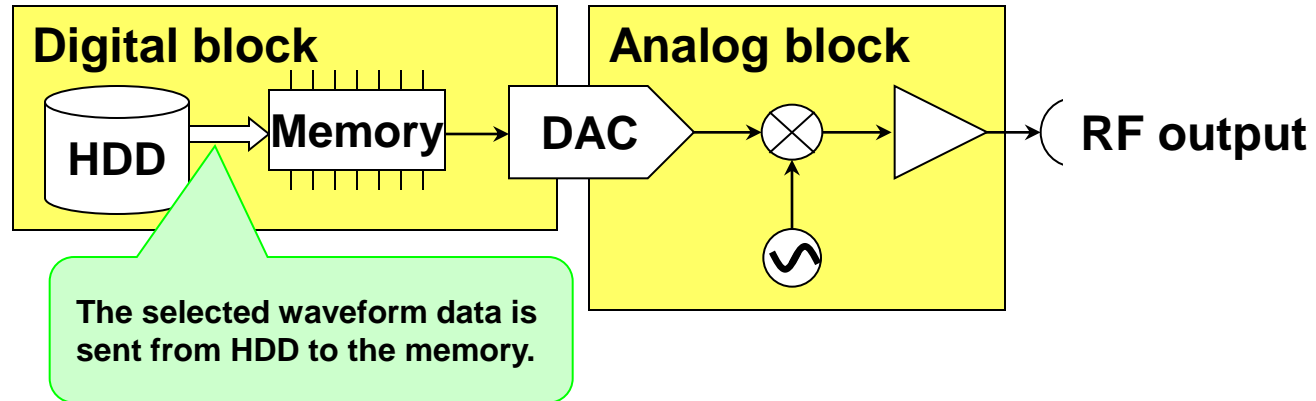

•Real-time signal generator

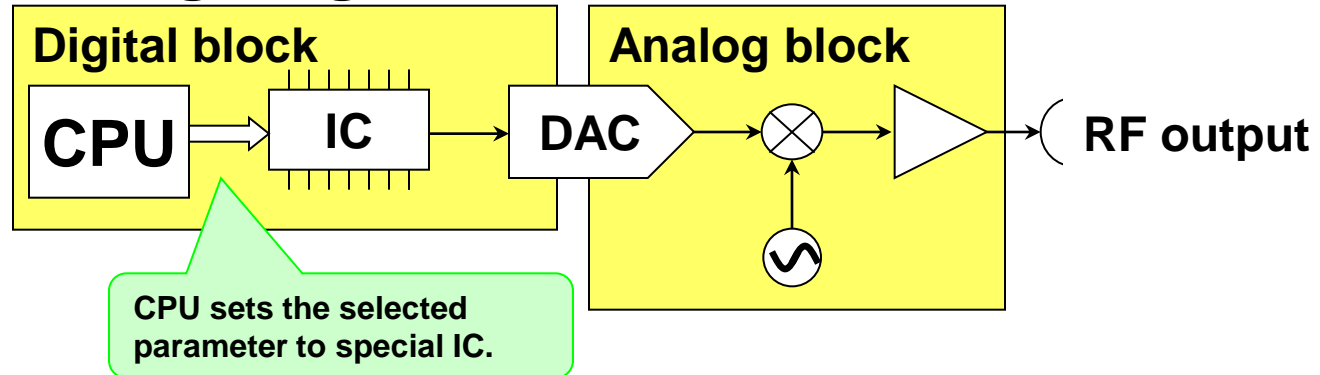

Basic performance

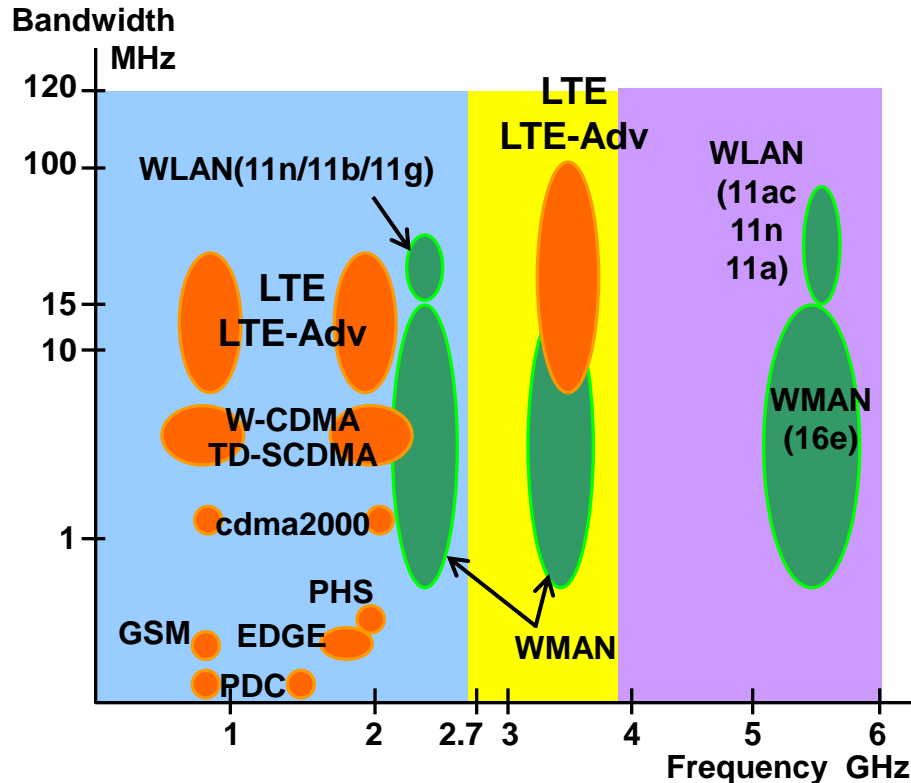

- ◆ **Frequency Range**
250 kHz to 3 GHz (standard)
250 kHz to 6 GHz (option)

Choose either 250 kHz to 3 GHz (standard) or 250 kHz to 6 GHz (option) for the frequency range. A 6 GHz upper frequency is required for the WLAN 5 GHz band frequency and next-generation communication system support.

Realize performances of the frequency of 6GHz and the modulation bandwidth of 120MHz(inside)

Signal generator with hardware capacity to output signals of almost all the present communication methods by single set.





*except UWB

- ◆ **Vector modulation bandwidth:**
150 MHz (Using External IQ input)
120 MHz (Using internal baseband signal generator)

A wider RF modulation bandwidth of 120 MHz is achieved when internal baseband signal generation is used. Furthermore, 150 MHz vector modulation bandwidth is supported for up to 6 GHz frequency when the External IQ input is used.



Basic performance

Wide vector modulation bandwidth

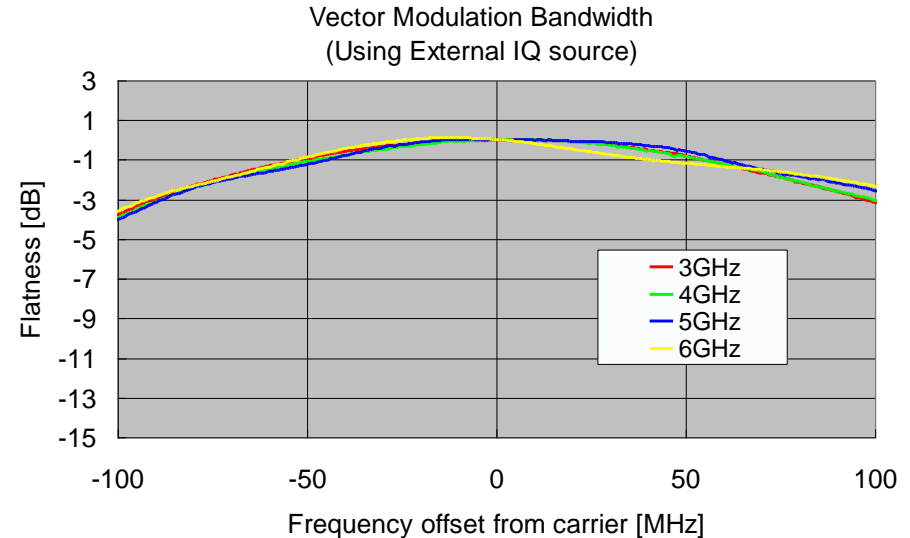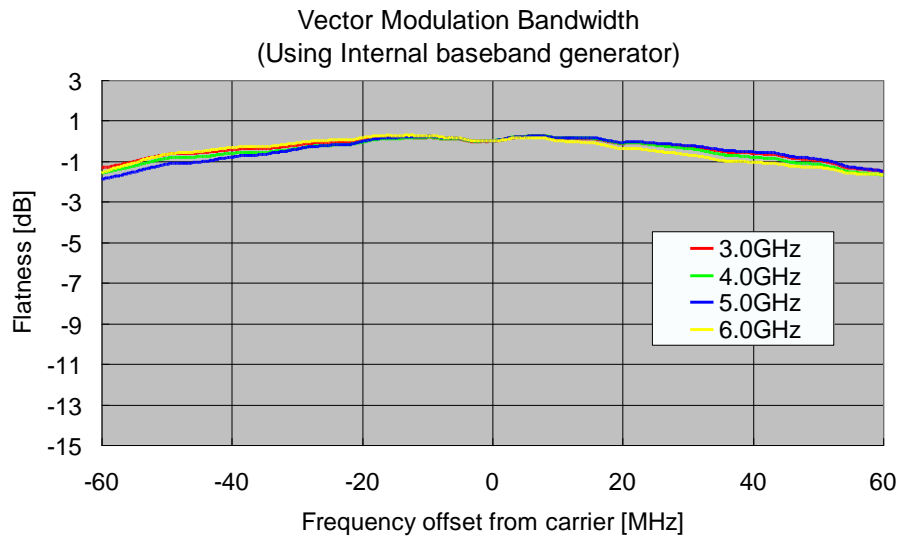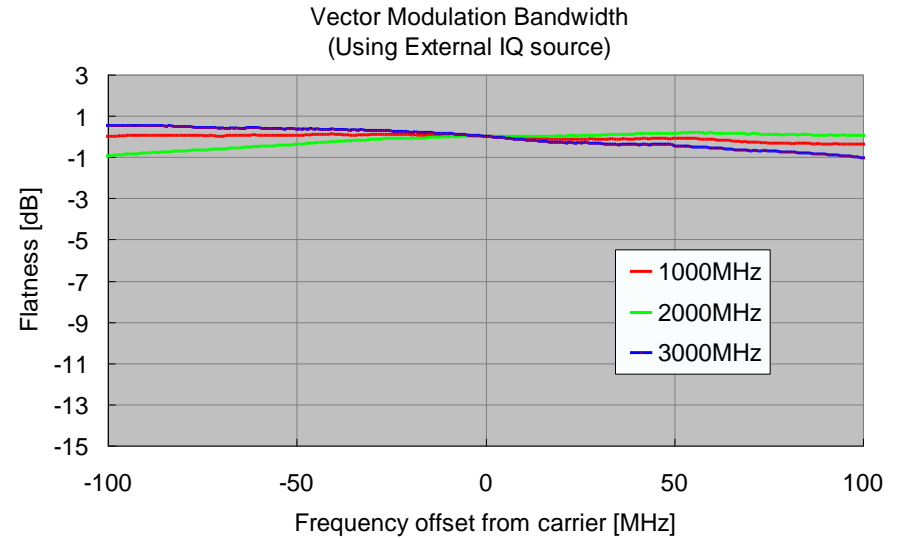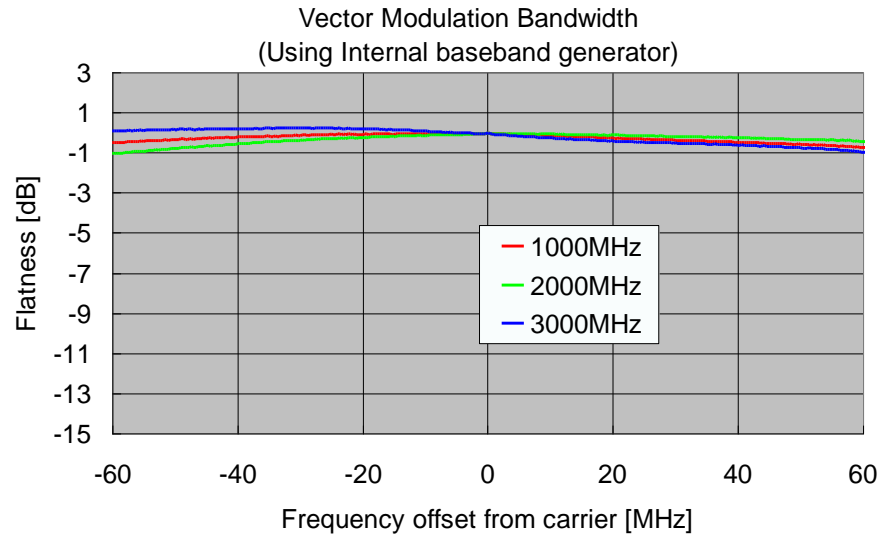


Waveform combine function

MG3700A contains two built-in arbitrary waveform memories, and these two memories can each choose one waveform pattern, respectively. MG3700A can output the signal of either one of the memories, and can also combine and output both signals simultaneously.

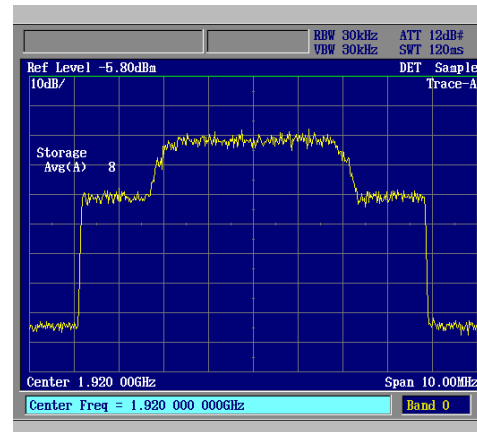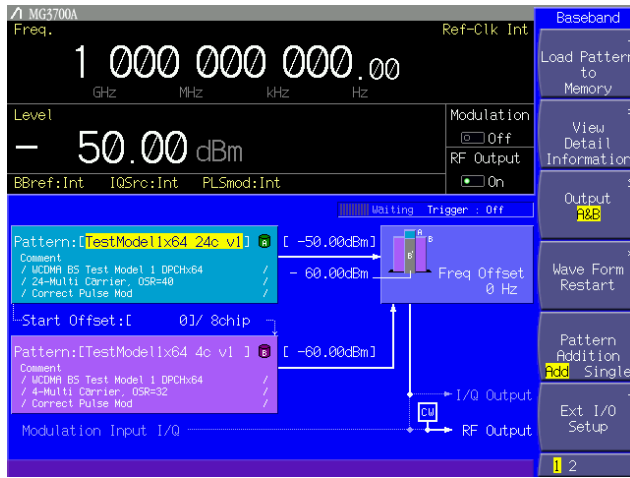

Wanted signal + AWGN

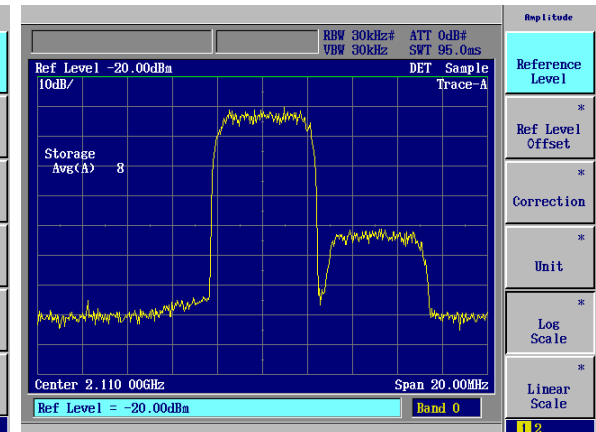

**Wanted signal
+ Interfere signal**

- ◆ The receiving sensitivity test covers measurements using two signals, such as ACS (Adjacent Channel Selectivity) and the blocking characteristic.
- ◆ The waveform combining function enables a single instrument to output a signal such as 'wanted signal + interfering signal' and 'wanted signal + AWGN'.
- ◆ Since S/N adjustment is carried out by digital processing, the level ratio accuracy is excellent.

Waveform combine function

Offset frequency higher limit of each system

Communication system	MG3700A Freq Offset setting range MAX	Standardized frequency offset MAX
ARIB STD-T61 BS/UE	±62911 kHz	±6.25 kHz
ARIB STD-T79 BS/UE	±52416 kHz	±25 kHz
ARIB STD-T86 BS/UE	±36857 kHz	±15 kHz
Bluetooth	±37.9 MHz	-----
CDMA2000	±62.3 MHz	-----
CDMA2000 1xEV-DO	±62.2 MHz	-----
Digital Broadcast (BS)	±43.2 MHz	-----
Digital Broadcast (CATV)	±14.2 MHz	-----
Digital Broadcast (CS)	±48.5 MHz	-----
Digital Broadcast (ISDB-T)	±47.9 MHz	-----
GPS	±51.8 MHz	-----
GSM	±41.4 MHz	-----
PDC	±34.3 MHz	±0.2 MHz
PHS BS/UE	±39.1 kHz	±1.2 MHz
RCR STD-39	±52416 kHz	±25 kHz
TD-SCDMA	±31.9 MHz	-----
W-CDMA BS	±34.944 MHz	±10 MHz
W-CDMA UE	±47.232 MHz	±20 MHz
WLAN IEEE802.11a	±7.7 MHz	±25 MHz
WLAN IEEE802.11b/s	±6.6 MHz	±25 MHz

Waveform combine function

Memory A: Wanted signal

Memory B: Modulated Interferer signal

Level ratio setting is easy.

- Each level setting
- C/N setting

Frequency offset can be set.

- **Output 2 signals of “Wanted signal and modulated interfering signal” by a single set.**
- **Level setting can be made by both each level and C/N**
- **Frequency off –set can be set by direct input.**


**Standard
function**

Characteristic of Waveform combine function

More useful **Combination function !**

Various types of combination file are standard built-in !

W-CDMA_BS, PDC, PHS

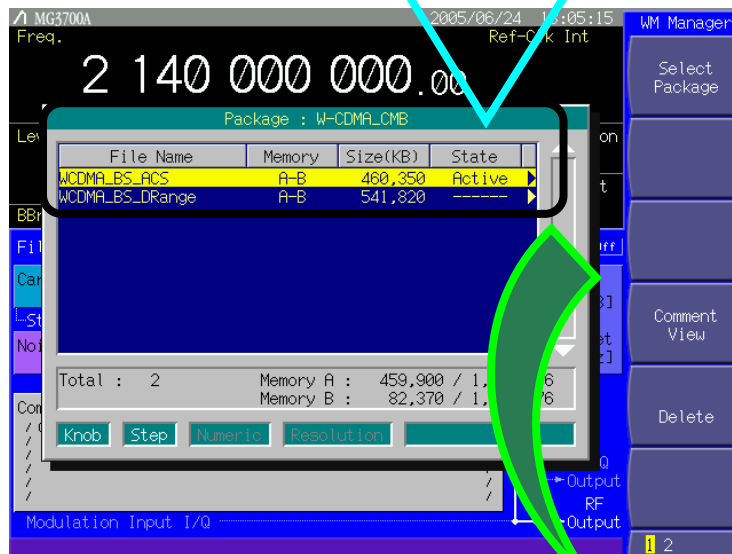


If measurement is performed by combining the waveform patterns of a wanted signal and an interfering signal as in adjacent channel selectivity and blocking measurements, only by selecting a combination file **enables to perform automatic settings** for such as waveform pattern select, level and frequency offset.

The combination file is generated by selecting Transfer&Setting > Combination file edit function of the standard IQproducer.

These operations are performed automatically only by selecting a combination file.

- Two Waveform Patterns
- Level Ratio
- Offset Frequency

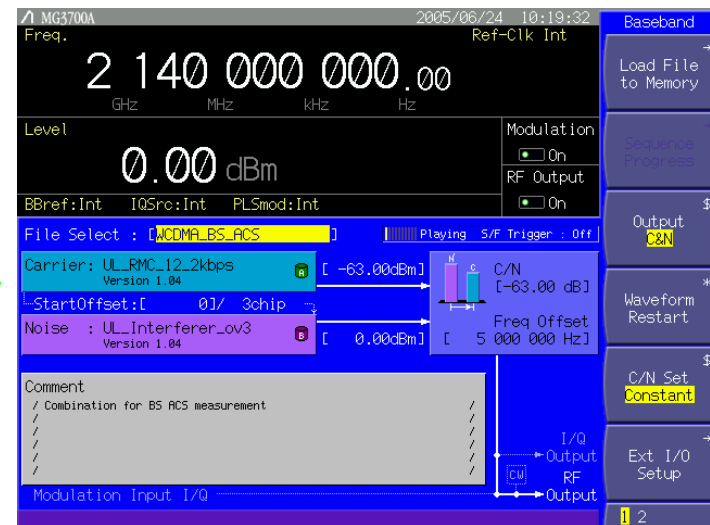


Pre-installed BER analyzer

A BER analyzer is a standard feature, allowing BER measurement of the receiving characteristic to be performed



Connector of the rear panel

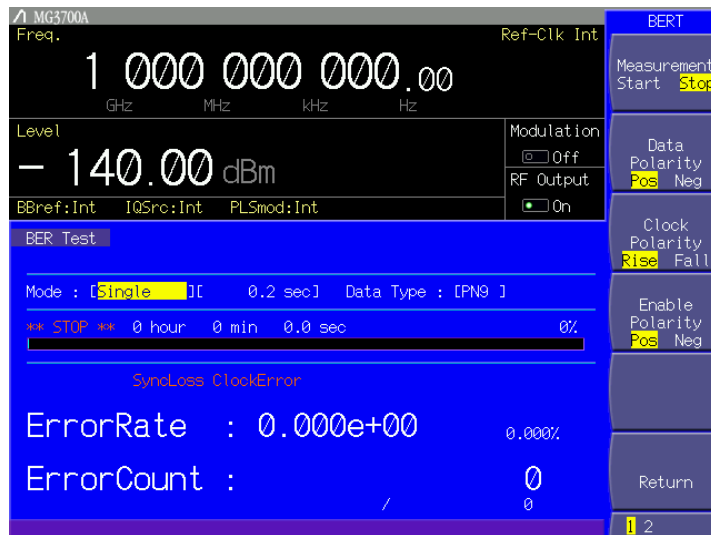


MG3700A

Vector signal generator

Wanted signal

- W-CDMA/HSDPA
- GSM/EDGE
- CDMA2000 1x
- TD-SCDMA
- PDC
- PHS
- CDMA2000 1xEV-DO

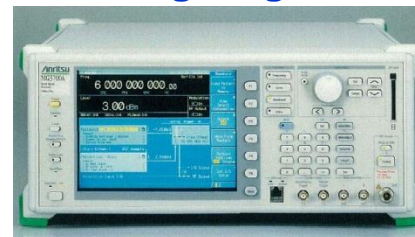

BER measurement

Data
Clock
Enable

- Bit rate: 1 kbps to 20 Mbps (standard)
- Bit rate: 100 bps to 120 Mbps (option)

- ◆ The receiving sensitivity test covers the measurement item specified by BER (Bit Error Rate).
>>> Examples: W-CDMA, GSM, PHS, and PDC
- ◆ Since the BER analyzer is built in as a standard feature, a receiver test can be carried out easily with a small footprint.

Optional BER analyzer

MG3700A-031: High Speed BER Test Function


Feature upgrade of the BER instrument such as extension of the input bit rate range by adding an optional BER instrument.

Comparison between standard BER measurement function and option BER measurement function

	MG3700A-031/131 High speed BER test function	Case used	Standard BER measurement function (Ver2.02 or later)
Input bit rate	100 bps to 120 Mbps	This can be used for WLAN and next-generation high-speed communications systems.	1 kbps to 20 Mbps
Data patterns	PN9/11/15/20/23, all0, all1, 01, PN9fix/11fix/15fix/20fix/23fix, UserPattern	PN*fix is a discontinuous PN data. BER measurement can be performed with the small-size waveform pattern using PN*fix even when the continuous data size is too large so that it exceeds MG3700A memory size such as PNP23. In user pattern, text-stayle bit stream (binary) file can be loaded to the data sotrage. It is available for WiMAX where the voice data test or the fixed-pattern measurement is defined.	PN9/11/15/20/23, all0, all1, 0101
Input threshold level	Adjustable	Under the condition of "Auto Resync=OFF", measurement can be performed even at the error rate higher than the allowbvale rate of 1% in the production inspection process of conventional communication systems or the research development of W-CDMA and such. Moreover, The option enables continuous measurement can be performed by adjusting the threshold level in accordance with error frequency.	TTL
SyncLoss count function	OK	This can be used for continuous measurement even when synchronization loss occurs.	----

Optional BER analyzer

Comparison between standard BER measurement function and option BER measurement function


Function	MG3700A-031/131 High speed BER test function	Standard BER measurement function (Ver2.02 or later)
Input bit rate	100 bps to 120 Mbps	1 kbps to 20 Mbps
Measurable patterns	PN9/11/15/20/23, all0, all1, 01, PN9fix/11fix/15fix/20fix/23fix, UserDefine	PN9/11/15/20/23, all0, all1, 01
Input threshold level	Adjustable (0.20 to 3.00 V, 0.05 V step)	TTL
Input signal	Data, Clock, Enable	
Polarity reversal function	The Data, Clock, Enable polarities can be reversed.	
Adjustable range of input timing	-1 to 15 clock (Data/Enable is adjusted for input Clock.)	
Input impedance	50 ohm, High impedance	
Measurable BER	0 to 10% (Reference value. Changed by the condition of the communication system and the data rate.)	0% to 1% (Reference value. Changed by the condition of the communication system and the data rate.)
Auto Resync	On, Off (When On is set, it becomes SyncLoss by the error detecting condition of Threshold and the measurement is stopped. When Off is set, the detection of SyncLoss is not performed.) Threshold setting range: [numerator/denominator] Choose from denominat	On, Off (Threshold: 6 bit/64 bit)
Measurement mode	Single, Continuous, Endless	
Measurable count	error bit: 1 to 2147483647 bits bit count: 1000 to 4294967295 bits	Time: <359999.0 sec bit count: 1000 to 4294967295 bits
Display	Bit Error, SyncLoss, ClockError, Enable Error, SyncLoss Count, Overflow Data Count, Overflow Syncloss, Error Rate, Error Count	Bit Error, SyncLoss, ClockError, Enable Error, Error Rate, Error Count

Optional BER analyzer

Remote command compatibility

Function	Command	Standard BER measurement function (Ver2.02 or later)	MG3700A-031/131 High speed BER test function
BER Measurement Commands			
Clear BER Measurement Bit Count	BERCOUNTCLR	---	✓
SyncLoss Count	BERSYNCLLOSS?	---	✓
BER Sync Loss Threshold	BERSYNCLLOSSTHLD	---	✓
Set Count Operation at SyncLoss Detection	BERSYNCLLOSSACT	---	✓
BER Stop Status	BERSTOPSTATUS?	---	✓
Measurement condition			
Set Measurement Termination Condition	BERCOUNTMODE	TIME DATBIT	DATABIT ERRORBIT
Set Measurement Time	BERTIME	✓	---
Set Measurement Error Bit Count	BERERRORBIT	---	✓
PN Type	BERTYPE	PN9 to 23, ALL0/1, ALT	PN9 to 23, ALL0/1, ALT, PN9Fix to PN23Fix, USERPATTERN
I/F Setting			
Set Data Signal Threshold Level	BERDATATHLD	---	✓
Set Clock Signal Threshold Level	BERCLKTHLD	---	✓
Set Enable Signal Threshold Level	BERENBLTHLD	---	✓
Data Delay	DERDATADELAY	---	✓
Enable Delay	BERENBLDELAY	---	✓
Input Impedance	BERINZ	---	✓
PNFix pattern/User define pattern			
Initial Value of PN Pattern Used in PN Fix	BERPNINITIAL	---	✓
Length of One Cycle of Pattern Used in PN Fix	BERPNFIXLENG	---	✓
BER Sync Start Position on User Pattern	BERSYNCLSTARTPOS	---	✓
Specify Length of Part Used for Synchronization Judgment in User Defined Pattern	BERSYNCLLENG	---	✓
Specify User Defined Pattern Loading Source Media	BERLOADMEDIA	---	✓
User Pattern File List	BERUSERPATLST?	---	✓
Load User Defined Pattern	BERLOADUSERPAT	---	✓
Name of Current User Defined Pattern File	BERUSERPAT?	---	✓
Bit Length of Current User Defined Pattern File	BERUSERPATLENG?	---	✓

Large capacity HDD & Memory

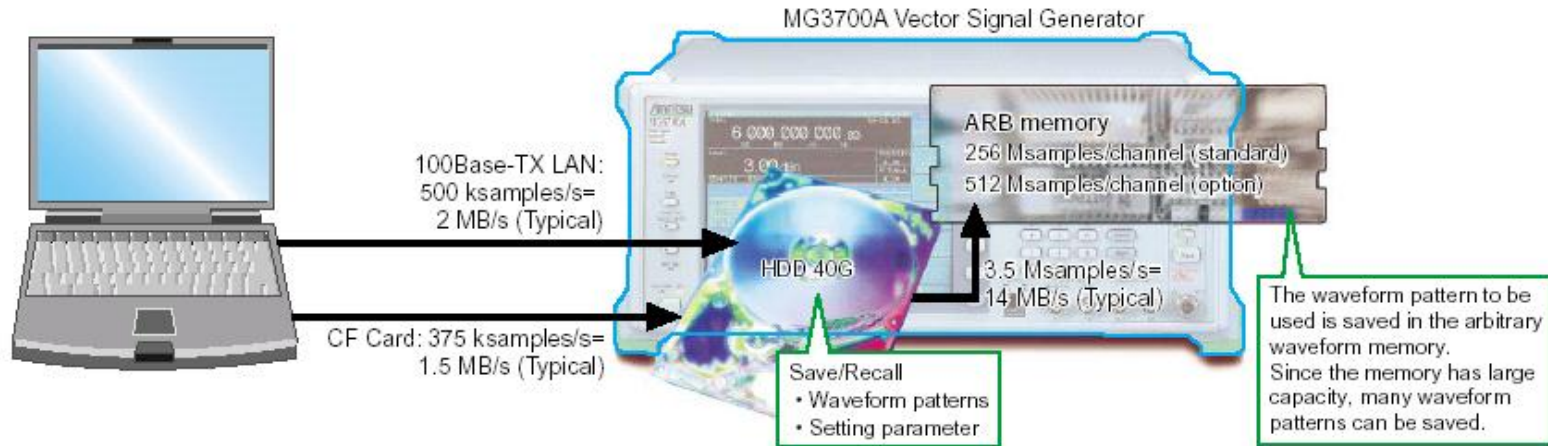

40Gbytes hard disk is built in.

Various large-capacity waveform patterns and MG3700A parameters can be saved to the 40 Gbyte hard disk. The transmission speed between the hard disk and the waveform memory is very high (14 Mbyte/s typical). If a hard disk breaks down, you can exchange it using the “HDD ASSY (option)” optional accessory.

Arbitrary waveform memory supports up to 2Gbytes


1 Gbytes = 256 Msamples/ch (standard)

2 Gbytes = 512 Msamples/ch (option)

Since the arbitrary waveform memory has a large capacity, many waveform patterns can be saved simultaneously. Waveform patterns are read from the hard disk and saved in memory, to be outputted instantly without accessing the hard disk again.

Although the standard MG3700A arbitrary waveform memory can save 256 Msamples/channel (128 Msamples/channel x 2) it is further extensible to 512 Msamples/channel (256 Msamples/channel x 2) as an option.

100Base-TX LAN

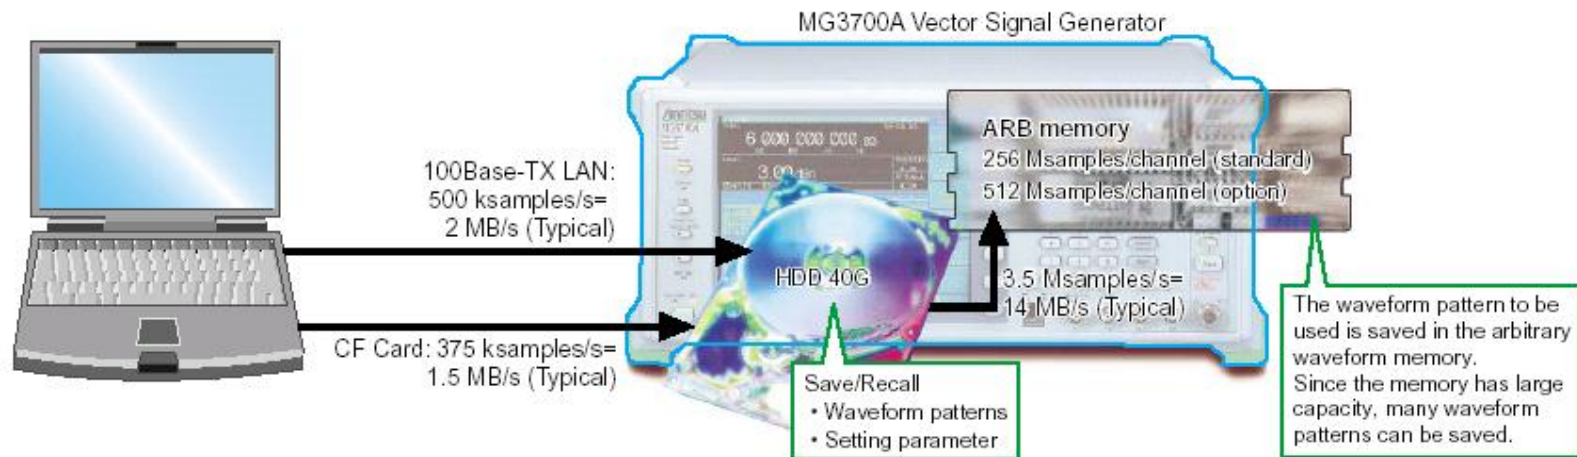

Transfer rate of waveform data:

PC to HDD 40G (By CF card)	375 k sample/s = 1.5 MB/s
PC to HDD 40G (By 100Base-Tx)	500 k sample/s = 2 MB/s
HDD 40G to ARB memory	3.5 M sample/s = 14 MB/s

As communication systems evolve into wide-band and high speed transmission, long waveform patterns must be transmitted. To accommodate such long patterns at high speed, the MG3700A supports 100BASE-TX LAN connections. When the waveform patterns of two or more MG3700A systems need to be updated, waveform data can be simultaneously transmitted to all MG3700A via LAN, so update time can be shortened.

Composition guide (1/2)

Classification	Outline	Standard	Option	Note
Frequency range	250 kHz to 3 GHz	√		
	250 kHz to 6 GHz		√	6 GHz Frequency Extension Option
Reference oscillator	Standard	√		Frequency: 10 MHz, Aging rate: $\pm 1 \times 10^{-8}$ /day, $\pm 1 \times 10^{-7}$ /year
Attenuator	Electron Attenuator	√		
	Mechanical Attenuator		√	Mechanical Attenuator Option Changes electronic attenuator to mechanical attenuator
Memory	1 GB = 256 Msamples/channel	√		128 Msamples/channel \times 2 Maximum of 256 Msamples/channel
	2 GB = 512 Msamples/channel		√	ARB Memory Upgrade 512 Msample Option 256 Msamples/channel \times 2 Maximum of 512 Msamples/channel
Baseband generator	Internal/External	√		Vector modulation bandwidth (Internal): 120 MHz Vector modulation bandwidth (External): 150 MHz
BER Analyzer		√		Input bit rate: 1 kbps to 20 Mbps Measurable Patterns: PN 9/11/15/20/23, ALL0, ALL1, repetition of 0 and 1
			√	High speed BER Test function Input bit rate: 100 bps to 120 Mbps Measurable Patterns: PN 9/11/15/20/23, ALL0, ALL1, repetition of 0 and 1 PN9fix/11fix/15fix/20fix/23fix, UserDefine
Hard disk	40 GB	√		Hard disk for saving waveform patterns and parameters

Composition guide (2/2)

*: Read the waveform pattern and IQproducer data sheet for details.

Classification	Outline	Standard	Option	Note
Waveform patterns software*	W-CDMA	√		Waveform patterns saved hard disk License required
	GSM/EDGE	√		
	CDMA2000 1X/1xEV-DO	√		
	W-LAN (IEEE802.11a/b/g)	√		
	PDC	√		
	PHS	√		
	Bluetooth	√		
	GPS	√		
	Digital Broadcast (ISDB-T, BS, CS, CATV)	√		
	AWGN	√		
	TD-SCDMA		√	License required (Model: MX370001A)
	Public Radio System (ARIB STD-T61/T79/T86)		√	License required (Model: MX370002A)
	DFS (TELEC/FCC)		√	License required (Model: MX370073A)
IQproducer License for each system*	DFS (ETSI)		√	License required (Model: MX370075A)
	HSDPA/HSUPA		√	License required (Model: MX370101A)
	Universal TDMA		√	License required (Model: MX370102A)
	CDMA2000 1xEV-DO		√	License required (Model: MX370103A)
	Multi-carrier		√	License required (Model: MX370104A)
	Mobile WiMAX		√	License required (Model: MX370105A)
	DVB-T/H		√	License required (Model: MX370106A)
	Fading		√	License required (Model: MX370107A)
	LTE FDD		√	License required (Model: MX370108A)
	LTE-Advanced FDD		√	License required (Model: MX370108A-001) *: Requires MX370108A
	Next generation PHS (XGP)		√	License required (Model: MX370109A)
	LTE TDD		√	License required (Model: MX370110A)
	LTE-Advanced TDD		√	License required (Model: MX370110A-001) *: Requires MX370110A
	WLAN		√	License required (Model: MX370111A)
	WLAN (IEEE802.11n/p/a/b/g/j)		√	License required (Model: MX370111A)
	WLAN (IEEE802.11ac)		√	License required (Model: MX370111A-001) *: Requires MX370111A. Only for MG3700A.
	TD-SCDMA		√	License required (Model: MX370112A)
IQproducer (PC application software)*	Parameter setting function	√		Various parameters of waveform pattern edited easily Parameter edit results saved as a setting file and can recalled
	Data converter function	√		Setting files converted to MG3700A waveform pattern License required for each system Setting file programmed in C or MATLAB converted to a waveform pattern without license
	Data transfer function	√		Waveform patterns, display copy files, and update programs transferred from PC to MG3700A via Ethernet
	Simulator function	√		For checking waveform pattern before transferring to MG3700A

MG3700A Vector signal generator
Standard accessory software


Introduction of IQproducer

A part of function needs a license for a fee.

Useful functions of the waveform generation software IQproducer (1/7)

Functions of IQproducer

IQproducer is PC application software, that can generate waveform patterns and transmit them to MG3700A. IQproducer™ is provided with MG3700A as a standard feature, and has the following four functions.

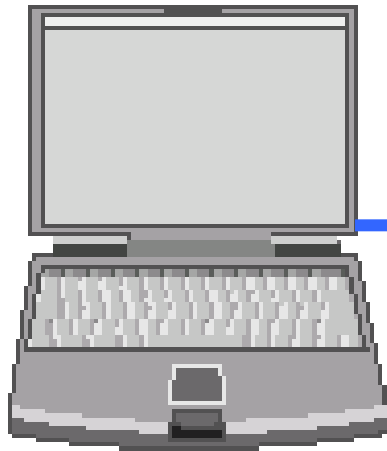

IQproducer

- Parameter setting function
- Simulation function
- File generation function
- Data transfer function

100Base-TX LAN



MG3700A Vector signal generator

Useful functions of the waveform generation software IQproducer (2/7)

Parameter setting function: System

The IQproducer™ System function has a graphical user interface corresponding to each communication system so you can set up parameters easily. A file with the resulting parameter settings can also be saved and recalled.

After trying the waveform pattern generation function with the IQproducer™ System function, in order to actually use a waveform pattern in MG3700A the license (option) corresponding to each system is required.

[IQproducer (Standard function)]

W-CDMA IQproducer

AWGN IQproducer

[IQproducer (Optional function)]

MX370101A HSDPA/HSUPA IQproducer

MX370102A TDMA IQproducer

MX370103A 1xEV-DO IQproducer

MX370104A Multi-carrier IQproducer

MX370105A Mobile WiMAX IQproducer

MX370106A DVB-T/H IQproducer

MX370107A Fading IQproducer

MX370108A LTE IQproducer

MX370108A-001 LTE-Advanced FDD option

MX370109A XG-PHS IQproducer


MX370110A LTE TDD IQproducer

New MX370110A-001 LTE-Advanced TDD option

MX370111A WLAN IQproducer

MX370111A-001 802.11ac (80MHz) option



MX370112A TD-SCDMA IQproducer

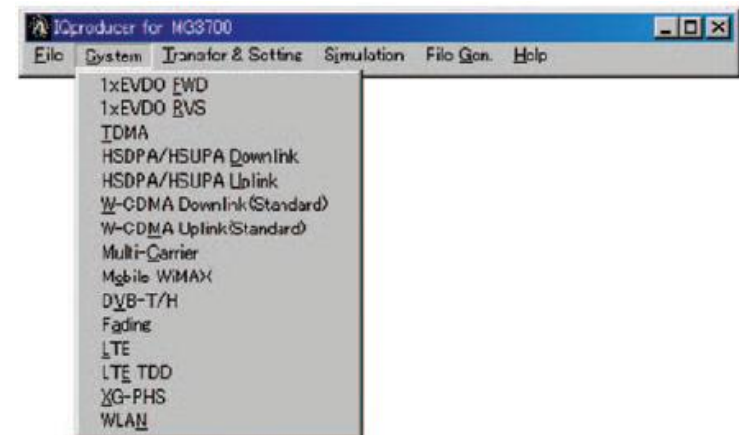

Useful functions of the waveform generation software IQproducer (3/7)

File generation function: File Gen.>Convert

The IQ sample data files in ASCII format programmed by general signal generation software (such as MATLAB) can also be converted to waveform patterns for MG3700A. This enhances the convenience of MG3700A for research/development simulation use, since custom-made waveform pattern files can be freely generated.

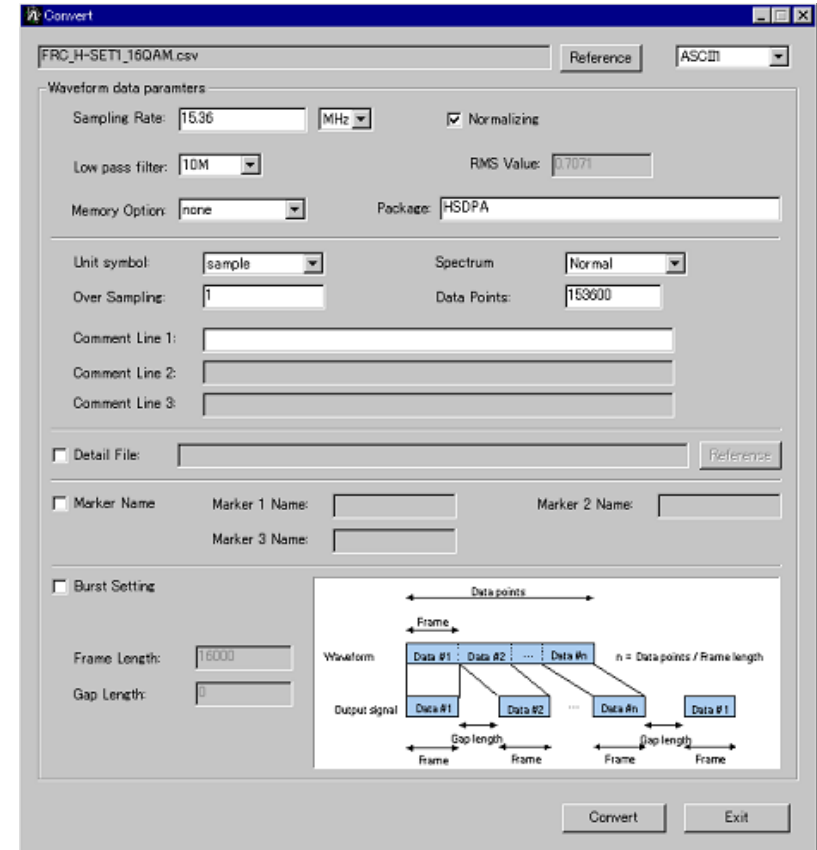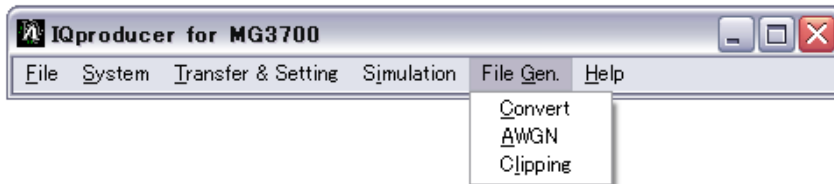


Convert screen

Useful functions of the waveform generation software IQproducer (4/7)

File generation function: File Gen.>AWGN

This function establishes the sampling rate and bandwidth, allowing any AWGN waveform pattern to be created. In addition, when the first combined waveform pattern (Wanted Signal) is selected, the Wanted Signal bandwidth and sampling rate are set automatically. The resulting AWGN waveform pattern and an existing waveform pattern can be combined, which is useful for base-station dynamic-range measurements.

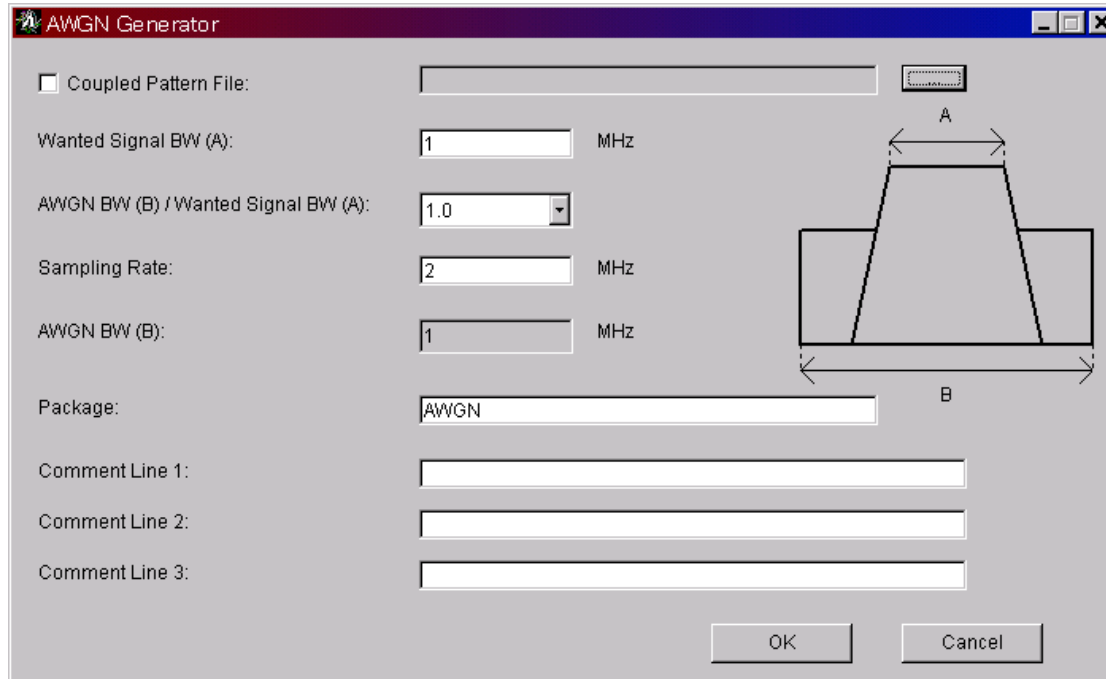

The screenshot shows the 'AWGN Generator' dialog box. It contains the following fields and controls:

- ☐ Coupled Pattern File: [Empty text box]
- Wanted Signal BW (A): [1] MHz
- AWGN BW (B) / Wanted Signal BW (A): [1.0] (dropdown menu)
- Sampling Rate: [2] MHz
- AWGN BW (B): [1] MHz
- Package: [AWGN]
- Comment Line 1: [Empty text box]
- Comment Line 2: [Empty text box]
- Comment Line 3: [Empty text box]
- OK button
- Cancel button


On the right side of the dialog, there is a diagram of a trapezoidal waveform. The top width is labeled 'A' and the bottom width is labeled 'B'.

AWGN screen

Useful functions of the waveform generation software IQproducer (5/7)

File generation function: File Gen.>Clipping

This function performs clipping of each type of waveform pattern. The clipped waveform pattern is created by setting the filter, bandwidth, and repetition times.

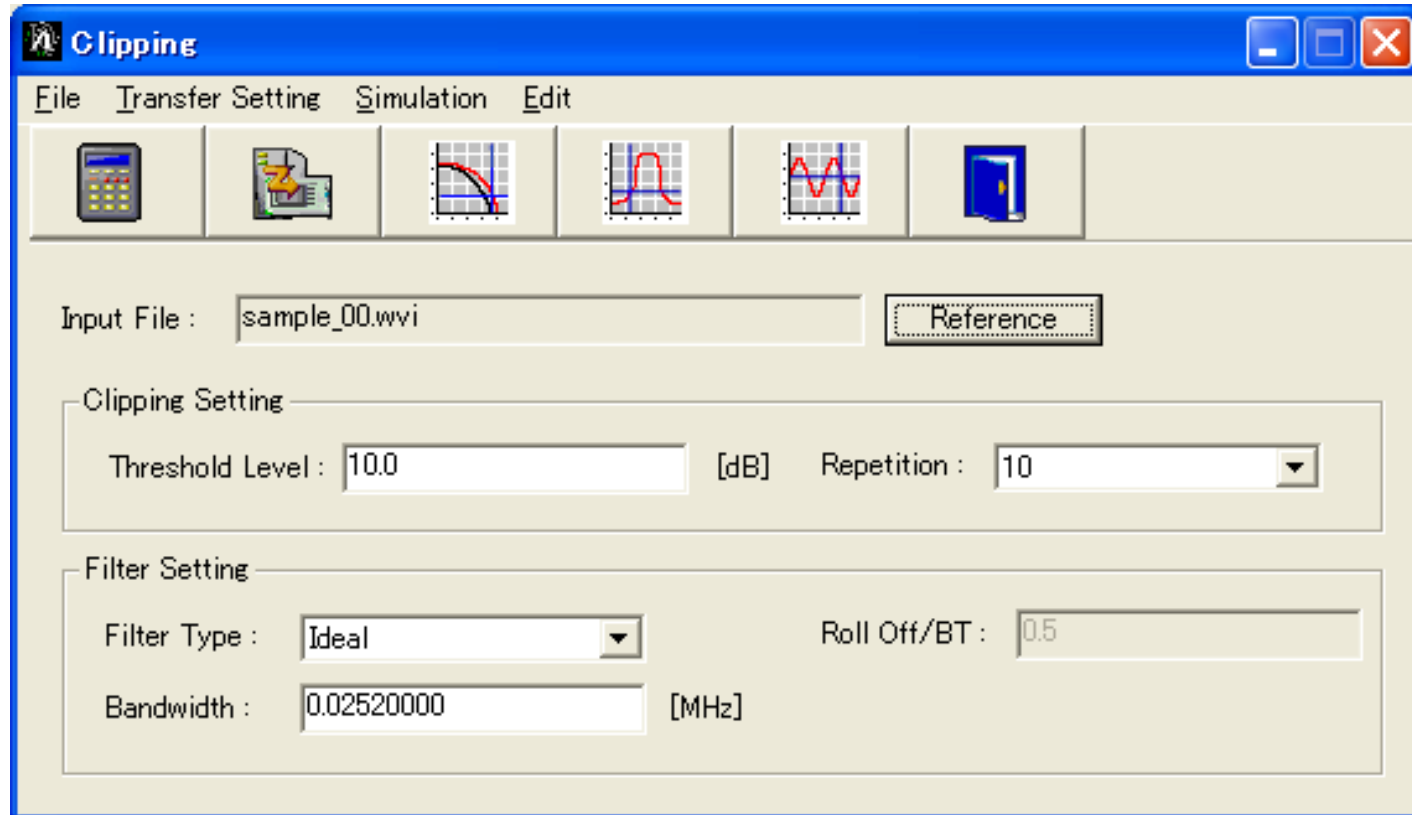


Clipping screen

Useful functions of the waveform generation software IQproducer (6/7)

Data transfer function: Transfer and Setting

A PC and the MG3700A can be connected via 100BASE-TX Ethernet, and data such as a waveform pattern generated by IQproducer a picture file, or a firmware upgrade file can be transmitted. Since waveform patterns can also be transmitted in a single procedure when multiple MG3700As are connected via a LAN, operating time is reduced. Moreover, waveform patterns on the MG3700A hard disk can be saved by remote control in the arbitrary waveform memory, and a waveform pattern can also be chosen to output.

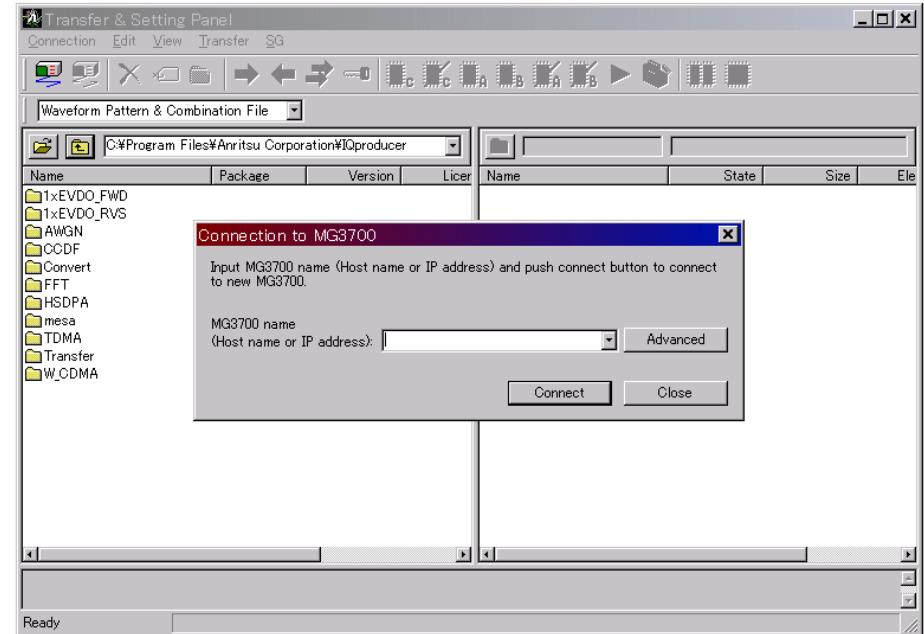

Transfer & Setting screen




Useful functions of the waveform generation software IQproducer (7/7)

Simulation function: CCDF, FFT, Time Domain

This function displays CCDF (Complimentary Cumulative Distribution Function), FFT (Fast Fourier Transform), or Time Domain graphs for the generated waveform pattern on the PC. It allows the waveform pattern to be checked graphically before transfer to the MG3700A.

CCDF graph:


The generated waveform pattern is read automatically and the CCDF graph of a maximum of eight waveform patterns can be displayed.

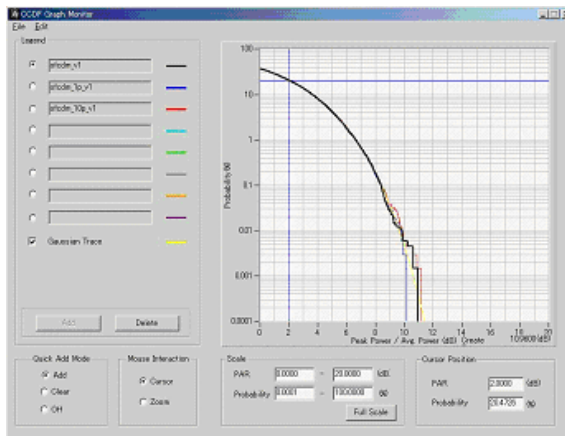

CCDF graph

FFT graph:


The generated waveform pattern is read automatically and the FFT graph of a maximum of four waveform patterns can be displayed.

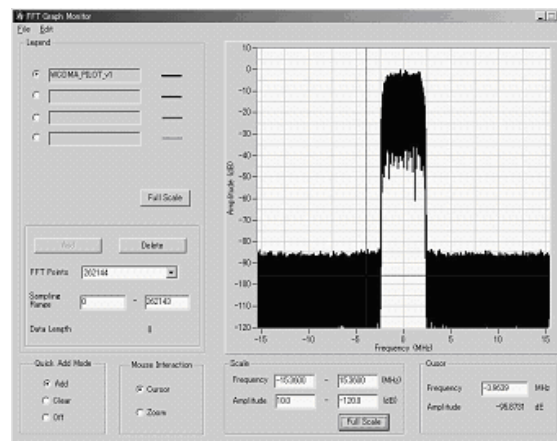

FFT graph

Time Domain graph:

The generated waveform pattern is read automatically and the Time Domain graph for up to four waveform patterns is displayed.

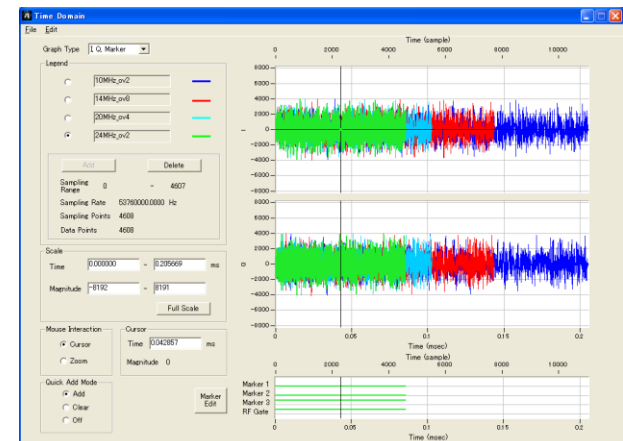

Time Domain graph

• **United States**

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• **Canada**

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• **Brazil**

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• **Mexico**

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• **United Kingdom**

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• **France**

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• **Germany**

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• **Italy**

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

• **Sweden**

Anritsu AB

Borgarfjordsgatan 13A, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• **Finland**

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• **Denmark**

Anritsu A/S (Service Assurance)

Anritsu AB (Test & Measurement)
Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• **Russia**

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• **United Arab Emirates**

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• **India**

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• **Singapore**

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• **P.R. China (Shanghai)**

Anritsu (China) Co., Ltd.

Room 1715, Tower A CITY CENTER of Shanghai,
No.100 Zunyi Road, Chang Ning District,
Shanghai 200051, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• **P.R. China (Hong Kong)**

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• **Japan**

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• **Korea**

Anritsu Corporation, Ltd.

502, 5FL H-Square N B/D, 681
Sampyeong-dong, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• **Australia**

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• **Taiwan**

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

Please Contact:

