

# CMA 3000

## SPECIFICATIONS

### Basic Instrument



#### Field testing has never been easier

CMA 3000 is Anritsu's next-generation portable, compact and user-friendly field tester. It's designed specifically for field technicians who install and maintain mobile-access and fixed-access networks, transmission networks and switching.

The CMA 3000 is a powerful tool for a wide range of applications, including fast first-aid troubleshooting to comprehensive, in-depth and all-layer analysis of transmission problems.

The basic CMA 3000 configuration, with its two 2 Mbps receivers and transmitters, supports framed and unframed testing and monitoring of 2 Mbps systems. This makes CMA 3000 the ideal instrument for measuring in- and out-of-service transmission quality.

#### Futureproof design

The modular design provides you with a clear and cost-effective upgrade path. This allows you to expand the CMA 3000 from a full-featured transmission line quality tester into an advanced signaling analyzer.

By adding options the CMA 3000 becomes a highly flexible field tester with the ability to test a large number of interfaces and technologies, including Ethernet, SDH, ATM, E3, E4, frame relay lines and the Abis interface of GSM and GPRS networks. Other options turn the CMA 3000 into a very powerful signaling analyzer for GSM, GPRS/EDGE, SS7, and ISDN protocols. Finally, options allow the instrument to emulate VoIP or ISDN PRI calls.

#### Easy-to-use interface

The intuitive user interface, with a large color LCD display and easy-to-understand graphical symbols allows you to easily read and interpret results of measurements.

Key Features	Key Applications
<ul style="list-style-type: none"> <li>• Simultaneous bi-directional monitoring of 2 Mbps lines</li> <li>• Powerful testing of framed Nx64 kbps and unframed 2 Mbps systems</li> <li>• Simultaneous testing of two 2 Mbps lines</li> <li>• Great flexibility through easy-to-install options</li> <li>• LEDs for immediate line state indications</li> <li>• Large color touch-display</li> <li>• Battery-powered, with more than 10 hours operation between recharges</li> </ul>	<ul style="list-style-type: none"> <li>• Comprehensive out-of-service testing for: <ul style="list-style-type: none"> <li>○ Installation</li> <li>○ Provisioning</li> <li>○ Propagation time analysis</li> </ul> </li> <li>• Performance analysis</li> <li>• Physical line monitoring</li> <li>• In-service monitoring for: <ul style="list-style-type: none"> <li>○ Fast troubleshooting</li> <li>○ Traffic monitoring</li> <li>○ Identification of synchronization problems</li> <li>○ In-service error performance measurement</li> </ul> </li> <li>• Drop-and-insert for pseudo in-service testing</li> </ul>

Using the high-contrast touch-screen display you can easily customize and store both setup and result screens to fit your personal needs and work routines. You may also configure the CMA 3000 to the received signal, eliminating time-consuming instrument setup. And you can store setups for particular applications in the instrument. To allow quick and easy distribution of standardized test setups within the organization it's also possible to transfer setups to a USB memory stick and subsequently load to other CMA 3000 field testers. With the powerful and flexible report generator you can create .pdf files for selected measurement results. With these files you can provide professional documentation of test results to your customers.

The CMA 3000 has USB ports and a LAN interface for data transfer and external communication to give you full flexibility whether in the field or in the workshop. Remote operation is facilitated through an optional MS Windows® program simulating the instrument's front panel. With another option the CMA 3000 can be remotely controlled with command line scripts, whereby the instrument turns into a fast and reliable tool for automated testing in manufacturing environments.

The instrument is powered by rechargeable and replaceable intelligent high-capacity LiIon batteries, providing more than 10 hours of operation between recharges. The CMA 3000 can also be powered via an external mains adapter for long-term measurements.

### Speeds troubleshooting

To speed troubleshooting the CMA 3000 displays alarms and transmission link status on LED indicators. The instrument's two inputs allow instant monitoring of both sides of a line and comparison of simultaneously recorded results.

The CMA 3000 status monitor is always active, providing essential information on the monitored transmission system, including:

- Line alarms on LED indicators with a trap facility
- Display of current input frequency and deviation
- Indication of input level
- Traffic channel usage
- Audio level in a traffic channel
- Propagation time monitor
- Listen-in on a traffic channel

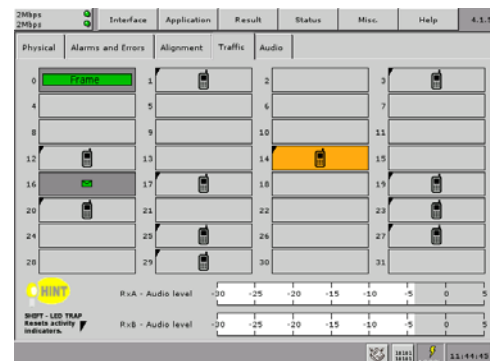


Figure 1 Fast overview of traffic channel time slots.

Fault location is greatly facilitated by the high degree of portability of the robust CMA 3000. This allows you take measurements at any suitable measuring point.

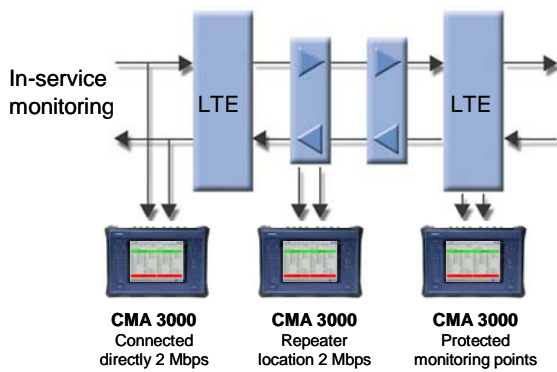


Figure 2 CMA 3000 allows you to perform in-service monitoring of 2 Mbps lines.

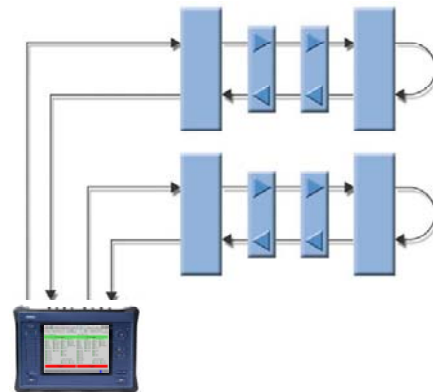


Figure 3 Simultaneous out-of-service testing of up to two 2 Mbps lines.

### Out-of-service or in-service statistics

For installation/commissioning and troubleshooting of out-of-service lines the CMA 3000 provides powerful statistical measurements for Bit Error Rate (BER) testing. Statistics are also available for in-service analysis of the transmission-error performance of a line. Information on errors and alarms is collected in time-intervals as defined by you, and error-performance parameters (G.821/G.826/M.2100) are calculated.

The Measurement Summary function gives you a rapid overview of a measurement via an 'OK/Questionable/not-OK' indication with user defined threshold levels. Histogram presentations facilitate the tracing of errors over time.

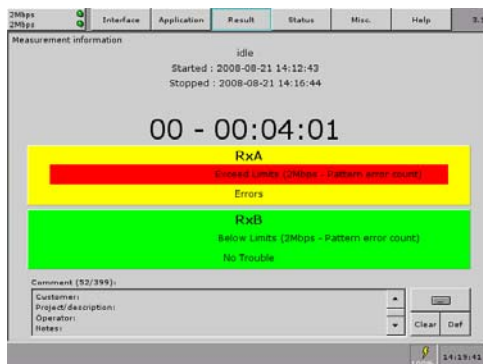


Figure 4 The Measurement Summary function gives you an OK/Questionable/not-OK indication.

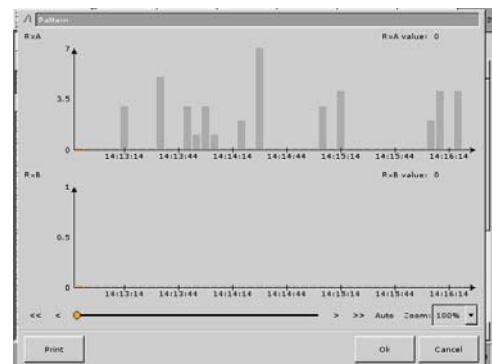


Figure 5 The CMA 3000 histograms facilitate the overview of a statistical measurement.

### Out-of-service tests

During installation/commissioning and stress testing of network elements it's possible to control the signal transmitted by the CMA 3000. When generating a 2Mbps signal, the instrument allows you to inject errors and alarms into the transmitted signal. In addition, you may diverge the frequency of the transmitted signal from nominal to test a receiver's ability to handle signals that are out of specifications. For 2 Mbps lines carried through SDH systems you can analyse the APS (Automatic Protection Switching) function of the SDH system with the CMA 3000's APS test and analysis application.



Figure 6 CMA 3000 gives comprehensive statistics on alarms and errors.

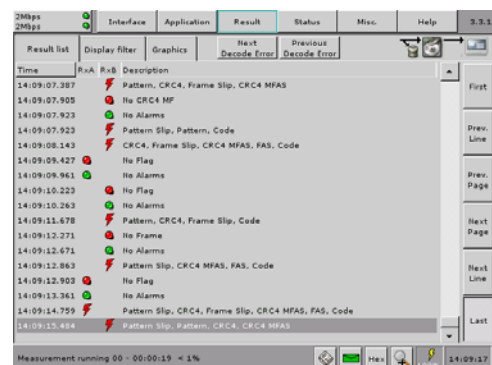


Figure 7 CMA 3000 logs errors and alarms with high-resolution time stamps.

## Advanced in-service troubleshooting

Troubleshooting transmission errors may require analysis of timing between events that occur within a few milliseconds. The CMA 3000's high-resolution log makes it easier to analyze timing between errors or alarms. Other events logged are CAS bit changes, Sa bit changes and, depending on the options added, a number of other event types such as GSM, GPRS/EDGE, SS7, and ISDN signaling. This allows you to correlate and observe the different event types. Using filters you may disable the logging and display of individual events, allowing you to view only the most essential information.

## Specifications

The specifications table on the following pages covers the functionality of the CMA 3000 basic instrument.

2 Mbps interfaces	
<b>General</b>	The interfaces comply with ITU-T recommendation G.703 for 2 Mbps
<b>Connectors</b>	Unbalanced connector: BNC or Siemens 1.6/5.6 (as specified by the user) Balanced connector: BNO
<b>Port number</b>	Number of transmitters: 2 Number of receivers: 2

Transmitter	
<b>Impedance</b>	Input impedances supported: <ul style="list-style-type: none"> <li>75 Ohms (unbalanced), 120 Ohms (balanced)</li> </ul>
<b>Clocks</b>	<ul style="list-style-type: none"> <li>Internal 2.048 Mbps clock. Accuracy: 4.6 ppm. Clock may be deviated +/- 125 ppm in 1 ppm steps</li> <li>Recovered from a receiver</li> <li>TTL level external 2.048 MHz clock in a D-Sub 15 male connector</li> </ul>
<b>Line code</b>	HDB3 or AMI (user-selectable)
<b>Framing</b>	Unframed or framed FAS/nFAS. Sa-bits (non-FAS) are user-programmable
<b>Drop and insert</b>	Supports drop & insert of one or multiple 64 kbps timeslots (TS) within E1
<b>Alarms</b>	Alarm may be generated: <ul style="list-style-type: none"> <li>No Signal, AIS, No Frame, CRC4 MF loss, Distant Alarm, CAS MF Loss, Distant MF Alarm</li> </ul>
<b>Errors</b>	Errors may be generated: <ul style="list-style-type: none"> <li>Bit, code, FAS bit, FAS word, CRC-4, E-bit</li> <li>Manual: 1-255 consecutive errors (1-16 consecutive FAS word errors)</li> <li>Continuous <math>10^{-2}</math>, <math>10^{-3}</math>, <math>10^{-4}</math>, <math>10^{-5}</math>, <math>10^{-6}</math>, <math>10^{-7}</math></li> <li>Provoking of G.821, G.826 or M.2100 events (ES, SES etc.) (Bit, FAS, CRC-4, E-bit)</li> </ul> Manual slip insertion: frame slip, pattern slip
<b>BER test patterns</b>	Pattern generation: <ul style="list-style-type: none"> <li>Unframed or framed n* 64 kbps in contiguous or non-contiguous channel access</li> </ul> Test patterns supported: <ul style="list-style-type: none"> <li>PRBS 6, PRBS 7, PRBS 9, PRBS 11, PRBS 12, PRBS 15, PRBS 20, PRBS 23, QRSS 11, QRSS 20</li> <li>All 0s, All 1s, Alternating (1:1), (1:3), (1:7), (3:1), (7:1), (3:24), Quick brown fox. User-defined up to 16 bits. Length in steps of 1 bit</li> <li>User-defined up to 2048 bits. Length in steps of 8 bits</li> </ul> All patterns, except 'All 0', 'All 1' and 'Fox', can be inverted
<b>Tone and speech signal insertion</b>	Tone in one speech channel on one of the transmitters: <ul style="list-style-type: none"> <li>Frequency: 1 Hz to 4 kHz in 1 Hz steps</li> <li>Level: +3 dBm to -70 dBm in 1 dBm steps</li> </ul> Artificial speech signal in one speech channel on one of the transmitters
<b>CAS</b>	CAS signaling bits may be generated

Receivers	
<b>Impedance</b>	Input impedances supported: <ul style="list-style-type: none"> <li>75 Ohms (unbalanced), 120 Ohms (balanced), High (&gt; 10 * nominal)</li> </ul>
<b>Jitter tolerance:</b>	In accordance with ITU-T G.823 section 3.1.1
<b>Return loss</b>	Complies with the ITU-T Rec. G.703
<b>Receiver attenuation and impedance modes</b>	<p><u>TERMINATE:</u></p> <ul style="list-style-type: none"> <li>Up to 40 dB cable attenuation, nominal impedance</li> </ul> <p><u>MONITOR:</u></p> <ul style="list-style-type: none"> <li>Up to 6 dB cable attenuation + 20 dB to 30 dB linear attenuation, nominal impedance</li> </ul> <p><u>BRIDGED:</u></p> <ul style="list-style-type: none"> <li>Up to 40 dB cable attenuation, high impedance</li> </ul>
<b>Receiver sensitivity</b>	As stated above. Inputs will tolerate levels up to 3 dB above nominal value
<b>Input level indication</b>	Range: +3 to -42 dB (normal) or - 20 to -32 dB (monitor)
<b>Receive signal rate</b>	<ul style="list-style-type: none"> <li>2048 kbps ± 100 ppm</li> <li>Frequency deviation indication accuracy: ± 1 ppm</li> </ul>
<b>Line Code</b>	HDB3 or AMI (user-selectable)
<b>Framing</b>	Unframed or framed FAS/nFAS
<b>Detectors</b>	<ul style="list-style-type: none"> <li>Each input has a no signal detector with levels -20dB, -33dB and full sensitivity</li> <li>Each input has a signal level detector</li> <li>Each input has signal frequency detector</li> </ul>
<b>Auto configuration</b>	Framing and pattern are automatically determined. Signaling channels are identified if signaling options are installed
<b>Alarms</b>	Alarm detected: <ul style="list-style-type: none"> <li>No Signal, AIS, No Frame, CRC4 MF loss, Distant Alarm, CAS MF loss, BERT Pattern Sync Loss, Distant MF Alarm</li> </ul>
<b>Errors</b>	Errors detected: <ul style="list-style-type: none"> <li>FAS/nFAS errors, Pattern Errors, CRC4 errors, E-bit (FEBE) errors, Code errors, Pattern Slips, Frame Slips</li> </ul>
<b>CAS</b>	CAS channel contents (TS16) can be supervised. Whenever a CAS channel contents change, an event is logged and time-stamped
<b>BER test patterns</b>	Same as transmitter. Test patterns are detected in nx64 kbps contiguous or non-contiguous channels (framed) or as an unframed signal
<b>Error performance</b>	<p>G.821, G.826 or M.2100 analysis of a PRBS in the received signal, or based on CRC-4, E-bit or FAS. ES, SES, DM (G.821), BBE (G.826), UAT, EFS, AT % or count.</p> <p>Error performance evaluation for the total measurement:</p> <ul style="list-style-type: none"> <li>HR% for a user- defined error performance parameter or programmable OK and not-OK limits for Bit, FAS, CRC-4 or E-bit count or ratio</li> </ul>
<b>Round trip delay (propagation time) measurement</b>	<ul style="list-style-type: none"> <li>Resolution: 1 µsec (unframed), 0.1 msec framed</li> <li>Range: 0 - 4 sec</li> </ul>
<b>Time-slot monitoring</b>	<p>FAS, NONFAS, CAS signaling, Contents of single time slot incl. positive/negative peak values and coder offset. Level and frequency for encoded tone:</p> <ul style="list-style-type: none"> <li>Frequency: 1 Hz to 4 kHz with 1 Hz resolution</li> <li>Level: +3 dBm to -66 dBm with 1 dBm resolution</li> </ul>
<b>Speech decode</b>	64 kbps (ITU-T Rec. G.703): A-law according to ITU-T Rec. G.711

Results	
<b>Status</b>	Current information on: <ul style="list-style-type: none"> <li>Alarms and errors on the monitored line</li> <li>Input level indication</li> <li>Frequency deviation</li> <li>Round trip delay</li> <li>Contents of one time slot</li> <li>FAS/non-FAS and CAS bits</li> <li>Traffic overview: Busy/idle indication from all 31 channels</li> </ul>
<b>Statistics</b>	User-defined resolution: 1, 2, 5, 10, 15, 30s, 1, 5, 10, 15, 30 min, 1, 2, 4, 6, 12 hours Information logged: <ul style="list-style-type: none"> <li>Alarms</li> <li>Code error count/ratio</li> <li>Pattern bit, FAS, CRC-4 and E-bit error count/ratio and G.821, G.826 or M.2100 parameters</li> <li>Frequency deviation information</li> </ul>
<b>Event Log</b>	<ul style="list-style-type: none"> <li>Events are logged with 1 msec resolution time stamps</li> <li>Logged events: Detected alarms and errors. Changes in CAS and Sa bits</li> <li>Filters enable/disable the logging of individual events</li> </ul>
<b>APS</b>	APS (Automatic Protection Switching) test and analysis: <ul style="list-style-type: none"> <li>APS switching time is measured. Switching time above a user defined threshold is highlighted               <ul style="list-style-type: none"> <li>Trigger events (user selectable): 2 Mbps alarms (LOS, No Frame or AIS).</li> </ul> </li> <li>Number of switchovers</li> </ul> Resolution of APS switching time measurement: <ul style="list-style-type: none"> <li>No Frame, AIS : 1 msec</li> <li>LOS: Undefined</li> </ul>

User Interface	
<b>Display</b>	8 ¼ " active TFT display with VGA resolution (640x480 pixels) and touch screen
<b>LEDs</b>	34 bi-color LEDs (with text on display)

Service interfaces	
<b>USB data Interface</b>	Two USB 1.1 ports. Connector type A. CMA 3000 will operate as host
<b>Ethernet Interface</b>	Ethernet 10/100. One RJ45 connector
<b>V.24 data Interface</b>	DTE. Connector: 9 pin, D-sub, Male

Other interfaces	
<b>Phone Interface</b>	<ul style="list-style-type: none"> <li>For connection of an optional telephone set; to insert human voice into a traffic channel and to listen-in using the loud speaker in the telephone set</li> </ul> Connector: <ul style="list-style-type: none"> <li>RJ11 (1x6) Female</li> </ul>
<b>Built-in loudspeaker</b>	<ul style="list-style-type: none"> <li>The built-in loudspeaker monitors speech in both directions of a voice channel</li> <li>Output level: user-controlled from front panel</li> <li>A 3.5 mm diameter jack provides ear phone access to the audio signal. The built-in loudspeaker is disconnected when a headset is plugged in</li> </ul>
<b>Compact Flash</b>	The instrument is equipped with one Compact Flash socket



Miscellaneous	
<b>Battery</b>	10.8 V rechargeable and replaceable intelligent Lilon battery Operating time (basic instrument): <ul style="list-style-type: none"> <li>• With PowerSave; more than 10 hours</li> <li>• Without PowerSave; more than 6 hours</li> </ul> Charging time: Typically 3 to 6 hours Indicator for remaining capacity: % and hours/minutes
<b>Mains adapter</b>	Input: 100-240 V AC, 50-60 Hz Output: 18 V DC, max. 3.4 A
<b>Mechanical</b>	Basic instrument: <ul style="list-style-type: none"> <li>• Dimensions: Approx. 23 x 33 x 7.5 cm (HxWxD)</li> <li>• Weight: Approx. 3.3 kg</li> </ul>
<b>Environmental</b>	Operating temperature: 0°C to +40°C Storage temperature: -25°C to +60°C The CMA 3000 is CE-marked and complies with EN 50081-1 and EN 50082-1
<b>Standard accessories</b>	User's Guide, Lilon battery, Mains adapter with mains cable, Stylus
<b>Options</b>	<ul style="list-style-type: none"> <li>• Ethernet 10/100 Mbps interface measurement option</li> <li>• Ethernet 10/100/1000 Mbps interface measurement option</li> <li>• Ethernet 10 Mbps / 100 Mbps / 1 Gbps /10 Gbps interface measurement option               <ul style="list-style-type: none"> <li>○ Two versions: Single or dual port at 10 Gbps level</li> <li>○ 10G LAN PHY and 10G WAN PHY options</li> </ul> </li> <li>• IP over Ethernet measurement option (requires an Ethernet option)</li> <li>• Ethernet multistream option (requires an Ethernet option)</li> <li>• Ethernet stacked VLAN option (requires an Ethernet option)</li> <li>• Ethernet MPLS option (requires an Ethernet option)</li> <li>• VoIP Call emulation options (requires an Ethernet option)</li> <li>• SDH test options</li> <li>• E3 interface testing</li> <li>• E4 interface testing (requires an SDH test option)</li> <li>• ATM-over-SDH measurement option (requires an SDH test option)</li> <li>• ATM- over-E1/E3 measurement option (E3 requires E3 test option)</li> <li>• V-series interface measurement option</li> <li>• Frame relay test option</li> <li>• Abis protocols – ETSI and vendor specific<sup>1</sup></li> <li>• Vendor specific GPRS Abis PCU protocols<sup>1</sup></li> <li>• GPRS Gb interface protocol decode (requires Frame relay test option)</li> <li>• SS7 protocols<sup>1</sup></li> <li>• ISDN protocols<sup>1</sup></li> <li>• ISDN PRI call emulators<sup>1</sup></li> <li>• FrontSim (remote operation) option</li> <li>• Remote Control – Scripting option</li> </ul>
<b>Additional accessories</b>	<ul style="list-style-type: none"> <li>• Carrying case</li> <li>• Carrying soft bag</li> <li>• Instrument carrying strap</li> <li>• Extra Lilon battery</li> <li>• Stand-alone battery charger</li> <li>• Ear phones</li> <li>• Telephone set</li> <li>• Measurement cables</li> </ul>
<b>Service products</b>	<ul style="list-style-type: none"> <li>• Factory calibration</li> </ul>

**Notes**

<sup>1</sup> Please contact your local Anritsu representative for details on available protocols

**Anritsu Corporation**

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan  
Phone: +81-46-223-1111  
Fax: +81-46-296-1264

**• U.S.A.****Anritsu Company**

1155 East Collins Blvd., Suite 100, Richardson,  
TX 75081, U.S.A.  
Toll Free: 1-800-267-4878  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

**• Canada****Anritsu Electronics Ltd.**

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

**• Brazil****Anritsu Eletrônica Ltda.**

Praca Amadeu Amaral, 27 - 1 Andar  
01327-010-Paraiso-São Paulo-Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

**• Mexico****Anritsu Company, S.A. de C.V.**

Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
11520 México, D.F., México  
Phone: +52-55-1101-2370  
Fax: +52-55-5254-3147

**• U.K.****Anritsu EMEA Ltd.**

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

**• France****Anritsu S.A.**

16/18 avenue du Québec-SILIC 720  
91961 COURTABOEUF CEDEX, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

**• Germany****Anritsu GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49 89 442308-0  
Fax: +49 89 442308-55

**• Italy****Anritsu S.p.A.**

Via Elio Vittorini, 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

**• Sweden****Anritsu AB**

Borgarfjordsgatan 13, 164 40 KISTA, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

**• Finland****Anritsu AB**

Teknobulevardi 3-5, FI-01530 VANTAA, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

**• Denmark****Anritsu A/S**

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark  
Phone: +45-72112200  
Fax: +45-72112210

**• Russia****Anritsu EMEA Ltd.****Representation Office in Russia**

Tverskaya str. 16/2, bld. 1, 7th floor.  
Russia, 125009, Moscow  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

**• United Arab Emirates****Anritsu EMEA Ltd.****Dubai Liaison Office**

PO Box 500413 - Dubai Internet City  
Al Thuraya Building, Tower 1, Suit 701, 7th Floor  
Dubai, United Arab Emirates  
Phone: +971-4-3670352  
Fax: +971-4-3688460

**• Singapore****Anritsu Pte Ltd.**

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)  
Singapore 118502  
Phone: +65-6282-2400  
Fax: +65-6282-2533

**• India****Anritsu Pte. Ltd.****India Branch Office**

3rd Floor, Shri Lakshminarayan Niwas, #2726, 80 ft Road,  
HAL 3rd Stage, Bangalore - 560 075, India  
Phone: +91-80-4058-1300  
Fax: +91-80-4058-1301

**• P.R. China (Hong Kong)****Anritsu Company Ltd.**

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong  
Phone: +852-2301-4980  
Fax: +852-2301-3545

**• P.R. China (Beijing)****Anritsu Company Ltd.****Beijing Representative Office**

Room 2008, Beijing Fortune Building,  
No. 5, Dong-San-Huan Bei Road,  
Chao-Yang District, Beijing 10004, P.R. China  
Phone: +86-10-6590-9230  
Fax: +86-10-6590-9235

**• Korea****Anritsu Corporation, Ltd.**

8F Hyunjuk Building, 832-41, Yeoksam Dong,  
Kangnam-ku, Seoul, 135-080, Korea  
Phone: +82-2-553-6603  
Fax: +82-2-553-6604

**• Australia****Anritsu Pty. Ltd.**

Unit 21/270 Ferntree Gully Road, Notting Hill,  
Victoria 3168 Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

**• Taiwan****Anritsu Company Inc.**

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817