MS2690A/MS2691A/MS2692A
シグナルアナライザ
取扱説明書
スペクトラムアナライザ機能
操作編

第 46 版

・製品を適切・安全にご使用いただくために，製品をご使用になる前に，本書を必ずお読みください。
・本書に記載以外の各種注意事項は，MS2690A/MS2691A/MS2692A シグナルアナライザ取扱説明書（本体 操作編）に記載の事項に準じますので，そちらをお読みください。
・本書は製品とともに保管してください。

アンリツ株式会社

管理番号：M-W2854AW-46.0

安全情報の表示について

当社では人身事故や財産の損害を避けるために，危険の程度に応じて下記のようなシグナルワードを用いて安全に関する情報を提供しています。記述内容を十分理解した上で機器を操作してください。
下記の表示およびシンボルは，そのすべてが本器に使用されているとは限りません。また，外観図などが本書に含まれるとき，製品に貼り付けたラベルなどがその図に記入されていない場合があります。

本書中の表示について

⚠ 危険　回避しなければ，死亡または重傷に至る切迫した危険があることを示します。

⚠ 警告　回避しなければ，死亡または重傷に至るおそれがある潜在的な危険があることを示します。

⚠ 注意　回避しなければ，軽度または中程度の人体の傷害に至るおそれがある潜在的危険，または，物的損害の発生のみが予測されるような危険があることを示します。

機器に表示または本書に使用されるシンボルについて

機器の内部や操作箇所の近くに，または本書に，安全上および操作上の注意を喚起するための表示があります。
これらの表示に使用しているシンボルの意味についても十分理解して，注意に従ってください。

禁止行為を示します。丸の中や近くに禁止内容が描かれています。

守るべき義務的行為を示します。丸の中や近くに守るべき内容が描かれています。

警告や注意を喚起することを示します。三角の中や近くにその内容が描かれています。

注意すべきことを示します。四角の中にその内容が書かれています。

このマークを付けた部品がリサイクル可能であることを示しています。

MS2690A/MS2691A/MS2692A
シグナルアナライザ
取扱説明書　スペクトラムアナライザ機能　操作編

2007年（平成19年）４月３日（初　版）
2019年（令和元年）10月31日（第46版）

・予告なしに本書の内容を変更することがあります。
・許可なしに本書の一部または全部を転載・複製することを禁じます。
Copyright © 2007-2019, ANRITSU CORPORATION
Printed in Japan

国外持出しに関する注意

1. 本製品は日本国内仕様であり，外国の安全規格などに準拠していない場合もありますので，国外へ持ち出して使用された場合，当社は一切の責任を負いかねます。
2. 本製品および添付マニュアル類は，輸出および国外持ち出しの際には，「外国為替及び外国貿易法」により，日本国政府の輸出許可や役務取引許可を必要とする場合があります。また，米国の「輸出管理規則」により，日本からの再輸出には米国政府の再輸出許可を必要とする場合があります。
   本製品や添付マニュアル類を輸出または国外持ち出しする場合は，事前に必ず当社の営業担当までご連絡ください。
   輸出規制を受ける製品やマニュアル類を廃棄処分する場合は，軍事用途等に不正使用されないように，破砕または裁断処理していただきますようお願い致します。

計測器のウイルス感染を防ぐための注意

- ファイルやデータのコピー
  当社より提供する，もしくは計測器内部で生成されるもの以外，計測器にはファイルやデータをコピーしないでください。
  前記のファイルやデータのコピーが必要な場合は，メディア（USB メモリ，CF メモリカードなど）も含めて事前にウイルスチェックを実施してください。
- ソフトウェアの追加
  当社が推奨または許諾するソフトウェア以外をダウンロードしたりインストールしたりしないでください。
- ネットワークへの接続
  接続するネットワークは，ウイルス感染への対策を施したネットワークを使用してください。
- マルウェア（ウイルスなど悪意のあるソフトウェア）からの保護
  本器は Windows オペレーティングシステムを搭載しています。
  本器をネットワークへ接続する場合は，以下のことを推奨します。
  ・ファイアウォールを有効にする
  ・Windows の重要な更新プログラムをインストールする
  ・アンチウイルスソフトウェアを利用する

はじめに

■取扱説明書の構成

MS2690A/MS2691A/MS2692A シグナルアナライザの取扱説明書は，以下のように構成されています。

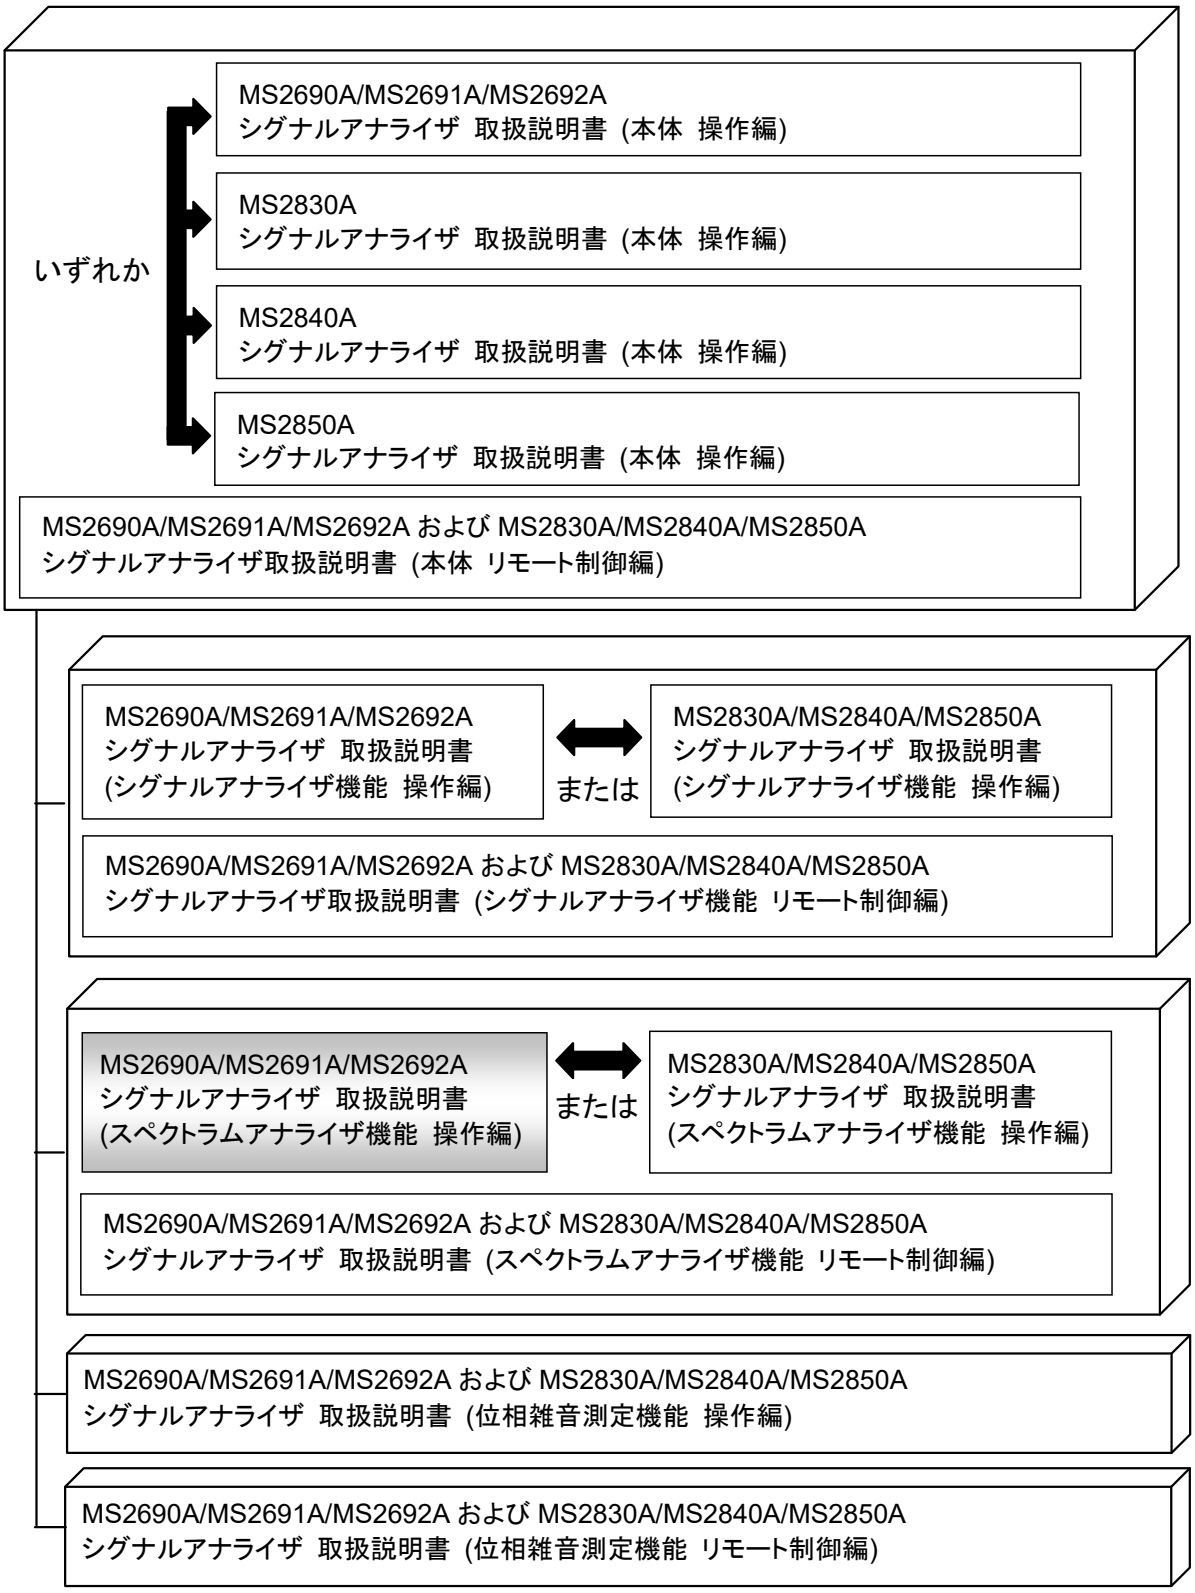

- シグナルアナライザ 取扱説明書 (本体 操作編)
- シグナルアナライザ 取扱説明書 (本体 リモート制御編)

本体の基本的な操作方法，保守手順，共通的な機能，共通的なリモート制御などについて記述しています。

- シグナルアナライザ 取扱説明書 (シグナルアナライザ機能 操作編)
- シグナルアナライザ 取扱説明書 (シグナルアナライザ機能 リモート制御編)

シグナルアナライザ機能の基本的な操作方法，機能，リモート制御などについて記述しています。

- シグナルアナライザ 取扱説明書 (スペクトラムアナライザ機能 操作編) ＜本書＞
- シグナルアナライザ 取扱説明書 (スペクトラムアナライザ機能 リモート制御編)

スペクトラムアナライザ機能の基本的な操作方法，機能，リモート制御などについて記述しています。

- シグナルアナライザ 取扱説明書 (位相雑音測定機能 操作編)
- シグナルアナライザ 取扱説明書 (位相雑音測定機能 リモート制御編)

位相雑音測定機能の基本的な操作方法，機能，リモート制御などについて記述しています。

で表示されているものは，パネルキーを表します。

目次

はじめに I

第 1 章　概要 1-1

1.1　スペクトラムアナライザの概要 1-2
1.2　スペクトラムアナライザの特徴 1-3

第 2 章　基本操作 2-1

2.1　表示説明 2-2
2.2　Single/Continuous 掃引 2-4
2.3　周波数の設定 2-5
2.4　レベルの設定 2-15
2.5　RBW/VBW の設定 2-30

第 3 章　表示モードの選択 3-1

3.1　ストレージモードの設定 3-2
3.2　Limit 機能の設定 3-10
3.3　Time/Sweep の設定 3-27
3.4　Save on Event 3-31

第 4 章　マーカ機能 4-1

4.1　マーカの設定 4-2
4.2　Peak サーチ機能の設定 4-13
4.3　マーカリストの表示 4-22

第 5 章　トリガ機能・ゲート機能 5-1

5.1　トリガ機能の設定 5-2
5.2　ゲート機能の設定 5-7

第 6 章　プリセレクタチューニング機能..... 6-1

6.1　プリセレクタチューニング機能 6-2

第 7 章　Measure 機能 7-1

7.1　Measure 機能の選択 7-2
7.2　隣接チャネル漏洩電力測定（ACP） 7-4
7.3　バースト内平均電力測定（Burst Average Power） 7-12
7.4　チャネルパワー測定（Channel Power） 7-14
7.5　占有帯域幅測定（Occupied Bandwidth） 7-16
7.6　スペクトラムエミッションマスク測定
（Spectrum Emission Mask） 7-18
7.7　スプリアスエミッション測定（Spurious Emission）..... 7-29
7.8　2 信号 3 次歪み 7-47

第 8 章　その他の機能 8-1

8.1　その他の機能の選択 8-2
8.2　タイトルの設定 8-3
8.3　ウォームアップメッセージの消去 8-4
8.4　Uncal メッセージの設定 8-5
8.5　内部基準周波数信号の調整 8-6
8.6　基準周波数信号の入力ソース 8-7
8.7　Pre-Amp 表示 8-8

付録 A　エラーメッセージ A-1

付録 B　初期値一覧 B-1

付録 C　Standard パラメーター覧 C-1

索引 索引-1

第1章　概要

この章では，スペクトラムアナライザ機能の概要について説明します。

1.1　スペクトラムアナライザの概要 1-2
1.2　スペクトラムアナライザの特徴 1-3

1.1　スペクトラムアナライザの概要

MS2690A/MS2691A/MS2692A シグナルアナライザ（以下，本器）は，各種無線機器・システムの送信特性を高速・高確度かつ容易に測定する装置です。

スペクトラムアナライザ機能（以下，本アプリケーション）は，従来の掃引型スペクトラムアナライザの特徴であるフルスパンでの広範囲な解析を可能とし，さらにディジタル IF ブロックによって高速かつ高精度な信号処理を実現しました。これにより，研究・開発から製造までさまざまな用途でご使用できます。

本アプリケーションの特徴は以下のとおりです。

- 周波数帯域（6 GHz/13.5 GHz/26.5 GHz）
- 広解析帯域幅（20 MHz）
- 高ダイナミックレンジ（180 dB）
- ディジタル IF による，高速かつ高精度な信号解析

1.2　スペクトラムアナライザの特徴

スペクトラムアナライザは入力信号の周波数成分を分析する測定器です。横軸を周波数，縦軸を信号レベルとして，各周波数成分の相対値をグラフとして表現します。

図 1.2-1 は高調波歪み成分を含む信号をオシロスコープおよびスペクトラムアナライザで観測した場合の模式図です。高調波成分を含む信号をオシロスコープで観測すると正弦波ではなく，歪みを持った波形が得られます。このことから信号が高調波成分を含んでいることはわかりますが，どのような高調波成分がどれだけ含まれているのか定量的に測定することは不可能です。これに対してスペクトラムアナライザでは信号成分をそれぞれの周波数成分に分離してそれぞれの周波数と振幅をグラフにすることで信号の成分を定量的に把握することができます。図 1.2-1 の例では信号が基本波（f0）と 2 次高調波成分（2×f0）からなることがわかり，それぞれの振幅も読み取ることができます。

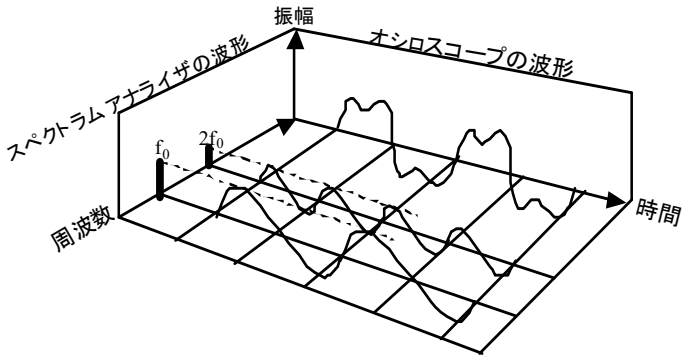

図 1.2-1　スペクトラムアナライザとオシロスコープの比較

スペクトラムアナライザの原理

スペクトラムアナライザは入力信号を単一周波数成分にまで分離し，それぞれの振幅を求めます。具体的には狭帯域のフィルタにより，単一周波数成分を抽出後，検波することで振幅を得ています。フィルタでの各信号成分の分離には，複数のフィルタを用いて一度に各周波数成分を得る方式（リアルタイム型）と，単一フィルタの中心周波数を時間と共に変化させることで各周波数成分を得る方式（掃引型）があります。

リアルタイム型は数 10 MHz 以下の狭い周波数範囲を測定するのに適しており，時間遅れが小さいのが特徴です。掃引型はリアルタイム型に比べ一画面を描画するのに長い時間を要しますが，GHz オーダーの広い周波数範囲を一度に観測することができるため，高次高調波のレベル測定や，未知の周波数成分の検出などに威力を発揮します。

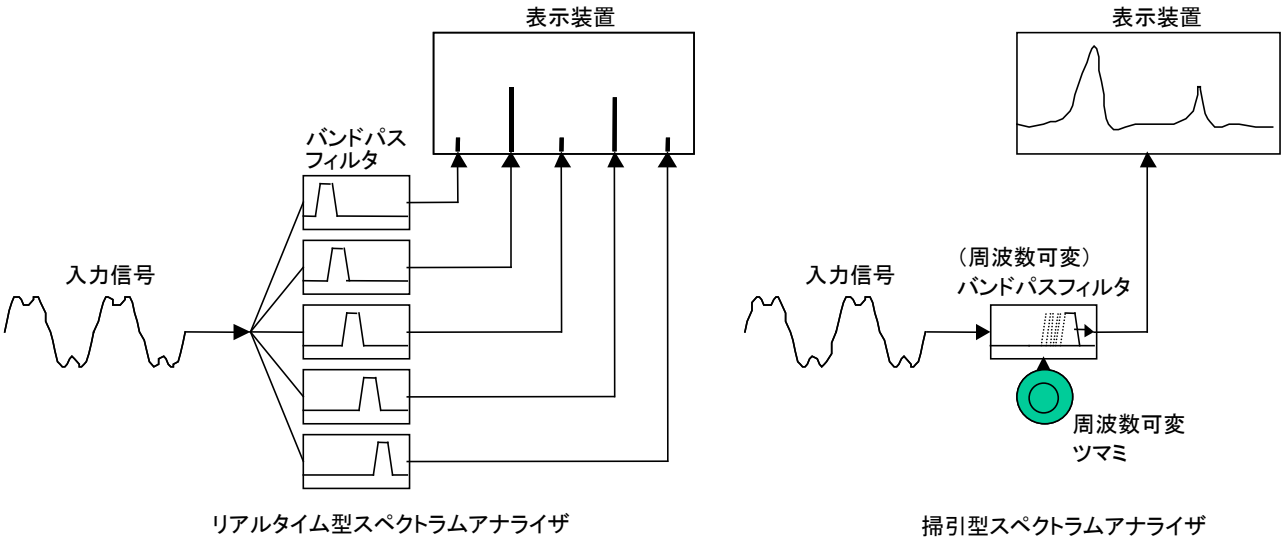

図 1.2-2　スペクトラムアナライザの原理

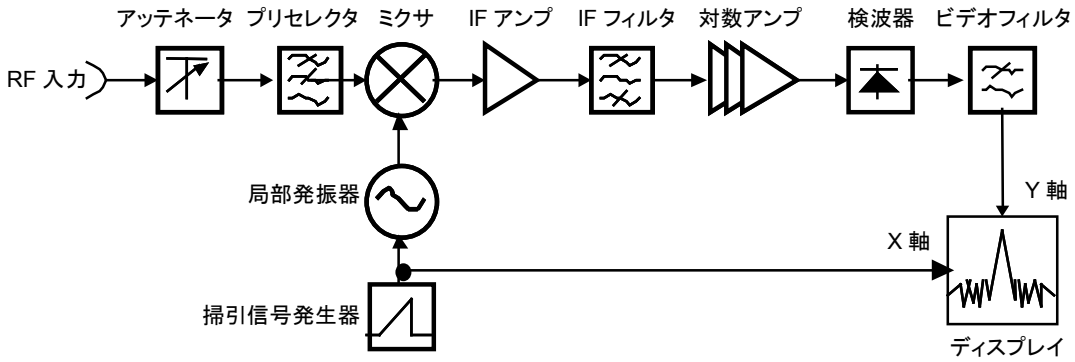

図 1.2-3　代表的な掃引型スペクトラムアナライザの構成

代表的な掃引型スペクトラムアナライザの構成を図 1.2-3 に示します。ここでは掃引型スペクトラムアナライザの 1 方式であるスーパーヘテロダイン方式について述べます。外部からの入力信号は，アッテネータとプリセレクタからなる入力回路を経て，ミクサで局部発振器からの信号と混合されます。ここで入力信号は一定の周波数（IF）の信号に変換されます。IF 信号は IF 段を通過し処理を受けてから，レベルに応じてディスプレイ上の縦軸（レベル）を決定します。局部発振器は入力電圧により発振周波数が変化する発振器であり，掃引信号発生器（のこぎり波発生器）からの信号で制御され，ディスプレイの横軸（周波数）を決定します。これにより，ディスプレイには入力周波数に応じたレベルがグラフとして表示されます。

入力回路は信号レベル調節用のアッテネータと，受信信号外の応答を低減し誤測定を防止するためのプリセレクタからなります。IF 段は目的の周波数のみを分離する IF フィルタ，広いレベル範囲で安定したゲインを持つ IF アンプ，および直線性の優れた対数アンプからなります。本器は IF 段にディジタル IF 方式を採用し，きわめて良好な直線性と選択度が得られています。

第2章　基本操作

この章では，本アプリケーションの基本的な操作方法について説明します。

2.1　表示説明 2-2
2.2　Single/Continuous 掃引 2-4
2.3　周波数の設定 2-5
　2.3.1　中心周波数の設定 2-9
　2.3.2　周波数スパンの設定 2-10
　2.3.3　スタート周波数の設定 2-11
　2.3.4　ストップ周波数の設定 2-11
　2.3.5　周波数オフセットの設定 2-12
　2.3.6　周波数バンドの変更 2-12
　2.3.7　時間／周波数ドメインパラメータの共有／独立の設定 2-13
　2.3.8　ステップサイズの設定 2-14
2.4　レベルの設定 2-15
　2.4.1　リファレンスレベルの設定 2-20
　2.4.2　入力アッテネータの設定 2-21
　2.4.3　スケールの設定 2-24
　2.4.4　リファレンスレベルの単位の設定 2-26
　2.4.5　リファレンスレベルオフセットの設定 2-27
　2.4.6　プリアンプ 2-28
　2.4.7　インピーダンスの設定 2-29
　2.4.8　マイクロ波プリセレクタバイパス 2-29
2.5　RBW/VBW の設定 2-30
　2.5.1　分解能帯域幅（RBW）の設定 2-32
　2.5.2　ビデオ帯域幅（VBW）の設定 2-33
　2.5.3　Video VBW/Power VBW の設定 2-34

2.1　表示説明

本アプリケーションのメイン画面とメインファンクションメニューについて説明します。

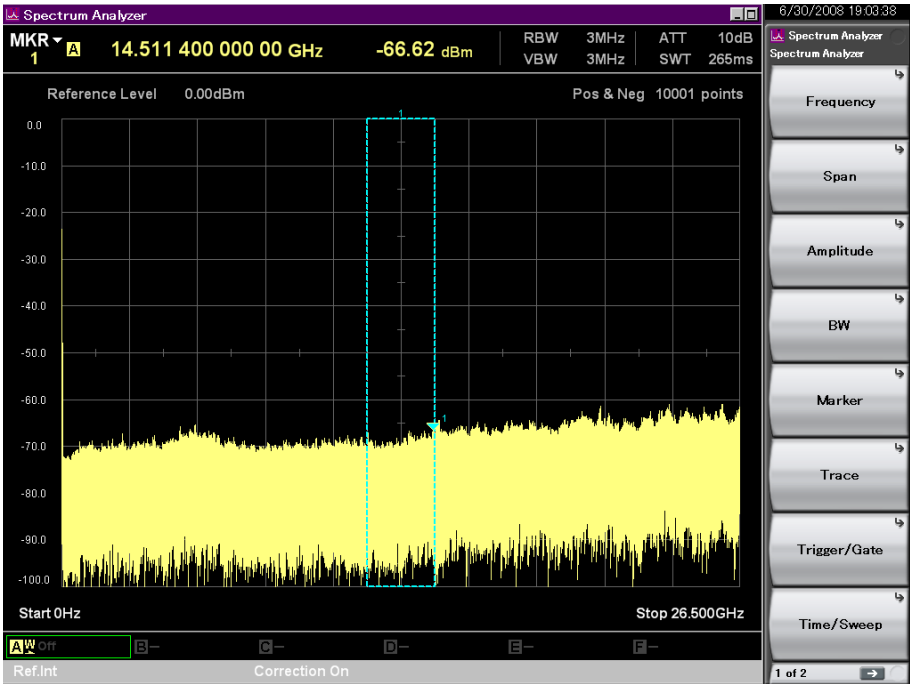

図2.1-1　本アプリケーションのメイン画面

Application Switch メニューで本アプリケーションが選択された状態で，Menu を押すとメインファンクションメニューが表示されます。

メインファンクションメニューは 2 ページからなります。→ を押すことで，ページを変更することができます。

表2.1-1　メインファンクションメニューの説明

ファンクションキー	メニュー表示	機能
ページ 1	Spectrum Analyzer	[Spectrum Analyzer]を押すと表示されます。
F1	Frequency	周波数の設定およびプリセレクタオートチューニングを実行します。 ☞ 2.3 周波数の設定
F2	Span	周波数スパンおよび周波数バンドを設定します。 ☞ 2.3 周波数の設定
F3	Amplitude	レベルを設定します。 ☞ 2.4 レベルの設定
F4	BW	分解能帯域幅，ビデオ帯域幅を設定します。 ☞ 2.5 RBW/VBW の設定
F5	Marker	マーカを設定します。 ☞ 4.1 マーカの設定
F6	Trace	トレースを設定します。 ☞ 3.1 ストレージモードの設定
F7	Trigger/Gate	トリガおよびゲートを設定します。 ☞ 第 5 章 トリガ機能・ゲート機能
F8	Time/Sweep	掃引時間およびトレースポイントを設定します。 ☞ 3.2 Time/Sweep の設定
ページ 2	Spectrum Analyzer	[Spectrum Analyzer]を押し，→を押すと表示されます。
F1	Peak Search	ピークサーチの実行および条件を設定します。 ☞ 4.2 Peak サーチ機能の設定
F2	Measure	Measure 機能に関する設定をします。 ☞ 第 7 章 Measure 機能
F7	Save on Event	イベント発生によって，Trace データを保存する Save on Event 機能を設定します。 ☞ 3.4 Save on Event
F8	Accessory	その他の機能を設定します。 ☞ 第 8 章 その他の機能

2.2　Single/Continuous 掃引

掃引には Single と Continuous があります。

(1)　Single 掃引

Single を押すと，掃引を1回実行します。トリガ機能またはゲート機能が On の場合は，掃引を開始する条件を満たしたあとに 1 回だけ掃引します。

(2)　Continuous 掃引

Continuous を押すと，連続掃引を実行します。トリガ機能またはゲート機能が On の場合は，掃引を開始する条件を満たすごとに掃引します。

図2.2-1　Single キーおよび Continuous キー

2.3　周波数の設定

測定周波数の設定は以下の種類があります。

- 中心周波数（Center Frequency）
- 周波数スパン（Frequency Span）
- スタート周波数（Start Frequency）
- ストップ周波数（Stop Frequency）

メインファンクションメニューページ 1 で F1 (Frequency) を押す，あるいは Frequency を押すと Frequency ファンクションメニューが表示されます。

メインファンクションメニューページ 1 で F2 (Span) を押す，あるいは Span を押すと Span ファンクションメニューが表示されます。

図2.3-1　Frequency キーおよび Span キー

Frequency ファンクションメニュー

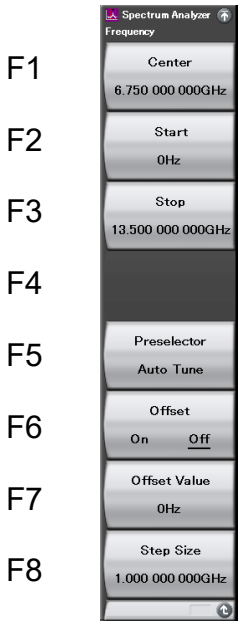

図2.3-2　Frequency ファンクションメニュー

表2.3-1　Frequency ファンクションメニューの説明

メニュー表示	機能
Frequency ページ 1	[Frequency] を押すと表示されます。
Center	中心周波数を設定します。 ☞ 2.3.1 中心周波数の設定
Start	スタート周波数を設定します。 ☞ 2.3.3 スタート周波数の設定
Stop	ストップ周波数を設定します。 ☞ 2.3.4 ストップ周波数の設定
Preselector Auto Tune	プリセレクタの自動同調を行います。 ☞ 6.1.1 Preselector Auto Tune の設定
Offset (On/Off)	周波数オフセット機能の On/Off を設定します。 ☞ 2.3.5 周波数オフセットの設定
Offset Value	周波数オフセット値を設定します。 ☞ 2.3.5 周波数オフセットの設定
Step Size	センター／スタート／ストップ周波数のステップサイズを設定します。 ☞ 2.3.8 ステップサイズの設定
Frequency ページ 2	[Frequency] を押し，(→)を押すと表示されます。
Micro Wave Preselector Bypass	プリセレクタをバイパスする機能を有効（On），無効（Off）にします。この機能は MS2692A-067/167 搭載時，有効です。 ☞ 2.4.8 マイクロ波プリセレクタバイパス ☞『MS2690A/MS2691A/MS2692A シグナルアナライザ 取扱説明書(本体操作編)』「1.3.7　MS2692A-067/167」

Span ファンクションメニュー

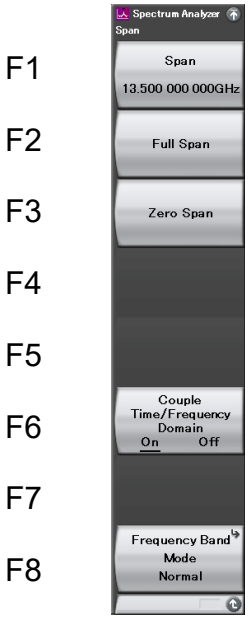

図2.3-3　Span ファンクションメニュー

表2.3-2　Span ファンクションメニューの説明

メニュー表示	機能
Span	周波数スパンを設定します。 ☞ 2.3.2　周波数スパンの設定
Full Span	フルスパンに設定します。 ☞ 2.3.2　周波数スパンの設定
Zero Span	ゼロスパンに設定します。 ☞ 2.3.2　周波数スパンの設定
Couple Time/Frequency Domain	時間／周波数ドメインパラメータの共有／独立を設定します。 ☞ 2.3.7　時間／周波数ドメインパラメータの共有／独立の設定
Frequency Band Mode	周波数バンドモードを設定します。 ☞ 2.3.6　周波数バンドの変更

周波数設定の表示ついて説明します。

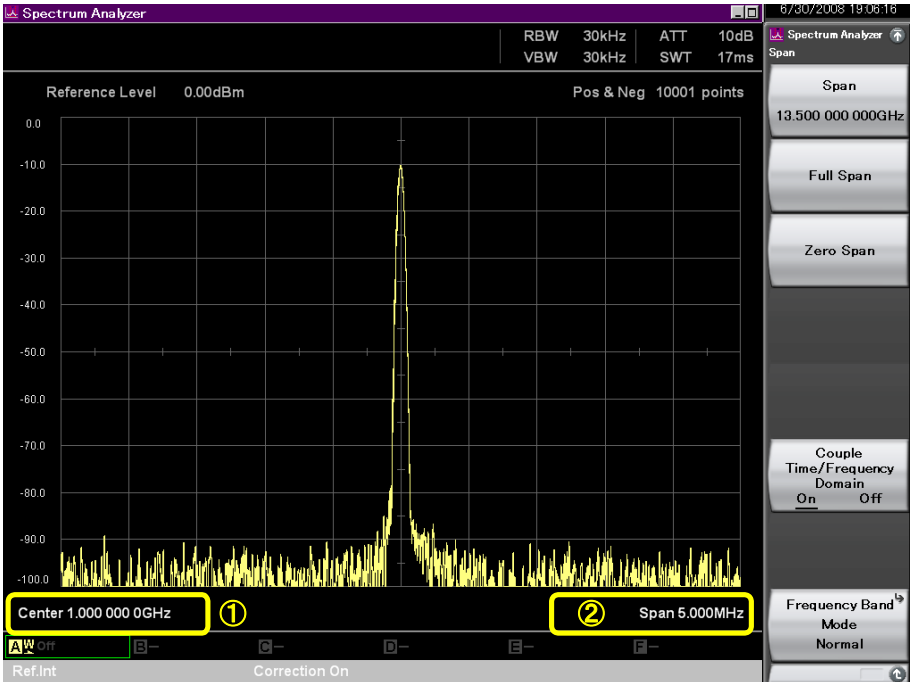

図2.3-4　周波数パラメータの表示項目

表2.3-3　周波数パラメータの表示項目の説明

番号	表示	内容
①	Center または Start	中心周波数またはスタート周波数を表示します。
②	Span または Stop	周波数スパンまたはストップ周波数を表示します。

2.3.1　中心周波数の設定

掃引する周波数範囲の中心周波数を設定します。

中心周波数の設定範囲，設定分解能

設定範囲	–100 MHz～6.05 GHz (MS2690A)*
	–100 MHz～13.6 GHz (MS2691A)*
	–100 MHz～26.6 GHz (MS2692A)*
	＊: 設定範囲はほかの周波数設定により制約されます。
最小設定分解能	1 Hz

操作例: 中心周波数を 1 MHz に設定する

＜手順＞

1. Frequency を押します。
2. 1 を押したあと，F2 (MHz) を押して，中心周波数を設定します。

2.3.2　周波数スパンの設定

掃引する周波数スパンを設定します。周波数スパンが 0 Hz 以上の場合を周波数ドメインモード（横軸が周波数表示），0 Hz の場合をタイムドメインモード（横軸が時間表示）と呼びます。

周波数スパンの設定範囲，設定分解能

設定範囲	300 Hz～6.15 GHz (MS2690A)*
	300 Hz～13.7 GHz (MS2691A)*
	300 Hz～26.7 GHz (MS2692A)*
	0 Hz (タイムドメインモード)
	＊：設定範囲はほかの周波数設定により制約されます。
最小設定分解能	2 Hz

操作例：周波数スパンを 100 MHz に設定する

＜手順＞

1. Span を押します。
2. 1 0 0 を押したあと，F2（MHz）を押して，周波数スパンを設定します。

操作例：周波数スパンを最大に設定する

＜手順＞

1. Span を押します。
2. F2（Full Span）を押します。

操作例：タイムドメインに設定する

＜手順 1＞

1. Span を押します。
2. F3（Zero Span）を押します。

＜手順 2＞

1. Span を押します。
2. 0 を押したあと，F2（MHz）を押して，周波数スパンを 0 Hz に設定します。

2.3.3　スタート周波数の設定

掃引する周波数範囲のスタート周波数を設定します。

スタート周波数の設定範囲，設定分解能

設定範囲	–100 MHz～6.0499997 GHz (MS2690A)*
	–100 MHz～13.5999997 GHz (MS2691A)*
	–100 MHz～26.5999997 GHz (MS2692A)*
	＊：設定範囲はほかの周波数設定により制約されます。
最小設定分解能	2 Hz

操作例：スタート周波数を 10 MHz に設定する

＜手順＞

1. [Frequency] を押します。
2. [F2] (Start) を押します。
3. [1] [0] を押したあと，[F2] (MHz) を押して，スタート周波数を設定します。

2.3.4　ストップ周波数の設定

掃引する周波数範囲のストップ周波数を設定します。

ストップ周波数の設定範囲，設定分解能

設定範囲	–99.9997 MHz～6.05 GHz (MS2690A)*
	–99.9997 MHz～13.6 GHz (MS2691A)*
	–99.9997 MHz～26.6 GHz (MS2692A)*
	＊：設定範囲はほかの周波数設定により制約されます。
最小設定分解能	2 Hz

操作例：ストップ周波数を 1 GHz に設定する

＜手順＞

1. [Frequency] を押します。
2. [F3] (Stop) を押します。
3. [1] を押したあと，[F1] (GHz) を押して，ストップ周波数を設定します。

2.3.5　周波数オフセットの設定

周波数表示のオフセット値を設定します。

周波数オフセットの設定範囲，設定分解能

設定範囲	–100～100 GHz
最小設定分解能	1 Hz

操作例：周波数オフセットを 1 GHz に設定する

＜手順＞

1. Frequency を押します。
2. F7 (Offset Value) を押します。
3. 1 を押したあと，F1 (GHz) を押して，周波数オフセットを設定します。

2.3.6　周波数バンドの変更

注：

本機能はオプション 003 プリセレクタ下限拡張（3 GHz）実装時のみ設定できます。

Frequency Band Mode を変更することで，プリセレクタの通過下限周波数を 6 GHz から 3 GHz に変更することができます。

図2.3.6-1　周波数バンド

Frequency Band Mode	プリセレクタ通過周波数
Normal	＞6.0 GHz
Spurious	≧3.0 GHz

操作例：プリセレクタの通過下限周波数を 3 GHz に設定する

＜手順＞

1. Span を押します。
2. F8 (Frequency Band Mode) を押します。
3. F2 (Spurious) を押し，プリセレクタの通過下限周波数を 3 GHz に設定します。

2.3.7　時間／周波数ドメインパラメータの共有／独立の設定

時間／周波数ドメインパラメータの共有／独立を設定します。本機能が On の時は RBW, VBW, 検波モード, トレースポイントの設定が時間／周波数ドメイン間で共通となります。On 設定した場合, 現在選択されているドメインのドメインパラメータが共有設定として使用されます。

表2.3.7-1　Couple Time/Frequency Domain

Couple Time/Frequency Domain	動作
On	RBW, VBW, 検波モード, トレースポイントの設定が時間／周波数ドメイン間で共通となります。
Off	RBW, VBW, 検波モード, トレースポイントの設定が時間／周波数ドメイン間で独立となります。

操作例: 共有／独立設定を独立にする

＜手順＞

1. Span を押します。
2. F6 (Couple Time/Frequency Domain) を押して Off に設定する。

2.3.8　ステップサイズの設定

中心周波数，スタート周波数，ストップ周波数のステップサイズを設定します。

ステップサイズの設定範囲，設定分解能

設定範囲	1 Hz～6.0 GHz (MS2690A)
	1 Hz～13.5 GHz (MS2691A)
	1 Hz～26.5 GHz (MS2692A)
最小設定分解能	1 Hz

操作例：ステップサイズを 1 MHz に設定する

＜手順＞

1. Frequency を押します。
2. F8 (Step Size) を押します。
3. 1 を押したあと，F2 (MHz) を押して，ステップサイズを設定します。

2.4　レベルの設定

メインファンクションメニューで F3 (Amplitude) を押す，あるいは Amplitude を押すと， Amplitude ファンクションメニューが表示されます。

Amplitude ファンクションメニューは 2 ページからなります。→ を押すことで，ページを変更することができます。

図2.4-1　Amplitude キー

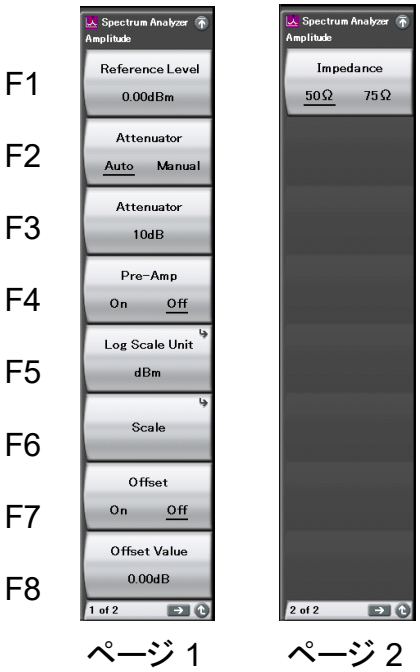

図2.4-2　Amplitude ファンクションメニュー

表2.4-1　Amplitude ファンクションメニューの説明

メニュー表示	機能
Amplitude ページ 1	[Amplitude] を押すと表示されます。
Reference Level	リファレンスレベルを設定します。 ☞ 2.4.1 リファレンスレベルの設定
Attenuator (Auto/Manual)	入力アッテネータの自動設定・手動設定を選択します。 ☞ 2.4.2 入力アッテネータの設定
Attenuator	入力アッテネータを設定します。 ☞ 2.4.2 入力アッテネータの設定
Pre-Amp	プリアンプの On/Off を設定します。 ☞ 2.4.6 プリアンプ
Log Scale Unit	Log スケール時のレベル表示単位を設定します。 ☞ 2.4.4 リファレンスレベルの単位の設定
Scale	Log レベル表示と Linear レベル表示を切り替えます。 ☞ 2.4.3 スケールの設定
Offset (On/Off)	リファレンスレベルオフセット機能の On/Off を設定します。 ☞ 2.4.5 リファレンスレベルオフセットの設定
Offset Value	リファレンスレベルオフセット値を設定します。 ☞ 2.4.5 リファレンスレベルオフセットの設定
Amplitude ページ 2	[Amplitude] を押し，(→)を押すと表示されます。
Impedance	インピーダンスの 50 Ω/75 Ωを設定します。 ☞ 2.4.7 インピーダンスの設定
Micro Wave Preselector Bypass	プリセレクタをバイパスする機能を有効（On），無効（Off）にします。この機能は MS2692A-067/167 搭載時，有効です。 ☞ 2.4.8 マイクロ波プリセレクタバイパス ☞『MS2690A/MS2691A/MS2692A シグナルアナライザ 取扱説明書(本体操作編)』「1.3.7　MS2692A-067/167」

パラメータに関する表示項目について説明します。

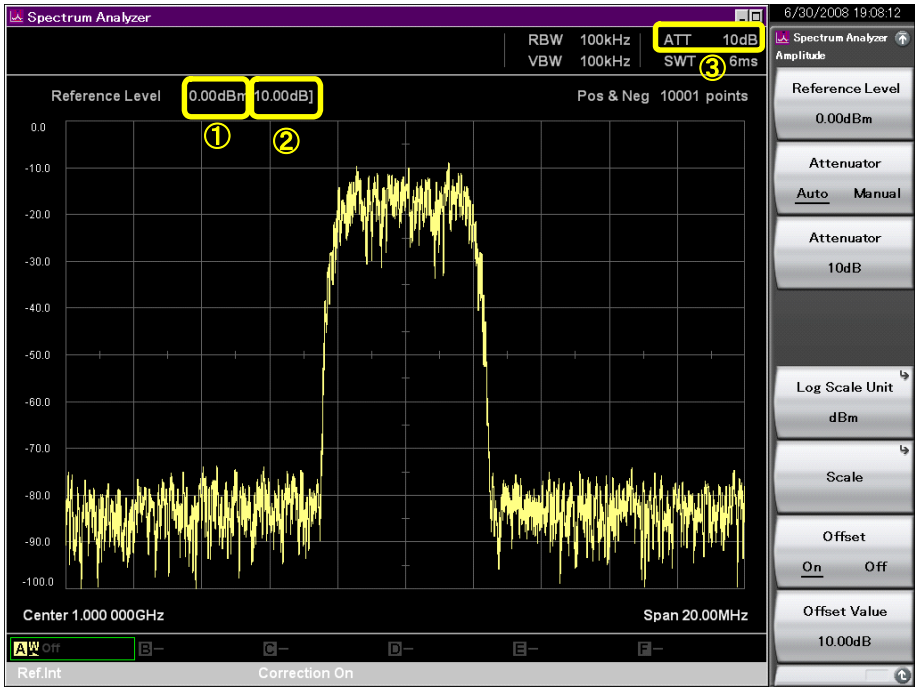

図2.4-3　パラメータの表示項目

表2.4-2　パラメータの表示項目の説明

番号	表示	内容
①	リファレンスレベル	リファレンスレベルを表示します。
②	リファレンスレベルオフセット	リファレンスレベルの加算オフセット値を表示します。
③	入力アッテネータ	入力アッテネータ値を表示します。

リファレンスレベル（振幅スケールの上端）の範囲を以下に示します。

リファレンスレベルの設定範囲，最小設定分解能

リファレンスレベル設定範囲	表 2.4-3 または表 2.4-4 参照
リファレンスレベル最小設定分解能	0.01 dB (dB 単位系) 有効桁数 3 (W 単位) 有効桁数 3 (V 単位)

表2.4-3　リファレンスレベルの設定範囲（プリアンプが Off の場合）

スケールモード	単位	リファレンスレベルの範囲
ログスケール	dBm*1	–120～＋50 dBm
	dBμV*2	–13.01～＋156.99 dBμV （インピーダンスが 50 Ωの場合） –11.25～＋158.75 dBμV （インピーダンスが 75 Ωの場合）
	dBmV*3	–73.01～＋96.99 dBmV （インピーダンスが 50 Ωの場合） –71.25～＋98.75 dBmV （インピーダンスが 75 Ωの場合）
	V	0.224 μV～70.7 V （インピーダンスが 50 Ωの場合） 0.274 μV～86.6 V （インピーダンスが 75 Ωの場合）
	W	1 fW～100 W
	dBμV (emf)*4	–6.99～＋163.01 dBμV (emf) （インピーダンスが 50 Ωの場合） –5.23～＋164.77 dBμV (emf) （インピーダンスが 75 Ωの場合）
	dBμV/m*5	–13.01～＋156.99 dBμV/m （インピーダンスが 50 Ωの場合） –11.25～＋158.75 dBμV/m （インピーダンスが 75 Ωの場合）
リニアスケール (dBm 換算)	V	22.4 μV～70.7 V （インピーダンスが 50 Ωの場合） 27.4 μV～86.6 V （インピーダンスが 50 Ωの場合） （–80～＋50 dBm）

表2.4-4　リファレンスレベル設定範囲（プリアンプが On の場合）

スケールモード	単位	リファレンスレベルの範囲
ログスケール	dBm*1	–120～＋30 dBm
	dBμV*2	–13.01～＋136.99 dBμV （インピーダンスが 50 Ωの場合） –11.25～＋138.75 dBμV （インピーダンスが 75 Ωの場合）
	dBmV*3	–73.01～＋76.99 dBmV （インピーダンスが 50 Ωの場合） –71.25～＋78.75 dBmV （インピーダンスが 75 Ωの場合）
	V	0.224 μV～7.07 V （インピーダンスが 50 Ωの場合） 0.274 μV～8.66 V （インピーダンスが 75 Ωの場合）
	W	1 fW～1 W
	dBμV (emf) *4	–6.99～＋143.01 dBμV (emf) （インピーダンスが 50 Ωの場合） –5.23～＋144.77 dBμV (emf) （インピーダンスが 75 Ωの場合）
	dBμV/m*5	–13.01～＋136.99 dBμV/m （インピーダンスが 50 Ωの場合） –11.25～＋138.75 dBμV/m （インピーダンスが 75 Ωの場合）
リニアスケール (dBm 換算)	V	2.24 μV～7.07 V （インピーダンスが 50 Ωの場合） 2.74 μV～8.66 V （インピーダンスが 50 Ωの場合） （–100～＋30 dBm）

＊1：1 mW を 0 dBm とする単位系です。

＊2：1 μV を 0 dBμV とする単位系です。50 Ωの終端電圧で表示されます。
インピーダンスを 75 Ωに設定した場合は，75 Ωの終端電圧として表示されます。

＊3：1 mV を 0 dBmV とする単位系です。50 Ωの終端電圧で表示されます。
インピーダンスを 75 Ωに設定した場合は，75 Ωの終端電圧として表示されます。

＊4：　開放電圧表示による dBμV 単位系です。dBμV＋6.02 dB の値となります。

＊5：電界強度を示す単位系です。ただし，表示値はアンテナ係数によります。

2.4.1　リファレンスレベルの設定

リファレンスレベル（振幅スケールの上端）を設定します。

操作例：リファレンスレベルを–10 dBm に設定する

＜手順＞

1. Amplitude を押します。
2. F1（Reference Level）を押します。
3. –/+ 1 0 を押したあと，F1（dBm）を押して，リファレンスレベルを設定します。

2.4.2　入力アッテネータの設定

(1)　Auto モード

リファレンスレベルの設定に応じて，入力アッテネータが自動的に設定されます。リファレンスレベルと同じレベルの信号を入力したときに，内部ミキサへの入力レベルが–10 dBm 以下となるように設定されます。

Auto モードでの設定値は表 2.4.2-1 または表 2.4.2-2 のとおりです。

表2.4.2-1　Auto モードの設定値（プリアンプが Off の場合）

N = Reference Level (dBm)	Attenuator Auto (dB)
–120≦*N*≦0	10
0＜*N*≦2	12
2＜*N*≦4	14
4＜*N*≦6	16
6＜*N*≦8	18
8＜*N*≦10	20
10＜*N*≦12	22
12＜*N*≦14	24
14＜*N*≦16	26
16＜*N*≦18	28
18＜*N*≦20	30
20＜*N*≦22	32
22＜*N*≦24	34
24＜*N*≦26	36
26＜*N*≦28	38
28＜*N*≦30	40
30＜*N*≦32	42
32＜*N*≦34	44
34＜*N*≦36	46
36＜*N*≦38	48
38＜*N*≦40	50
40＜*N*≦42	52
42＜*N*≦44	54
44＜*N*≦46	56
46＜*N*≦48	58
48＜*N*≦50	60

表2.4.2-2　Auto モードの設定値 (プリアンプが On の場合)

N = Reference Level (dBm)	Attenuator Auto (dB)
$-120 < N \leqq -20$	10
$-20 < N \leqq -18$	12
$-18 < N \leqq -16$	14
$-16 < N \leqq -14$	16
$-14 < N \leqq -12$	18
$-12 < N \leqq -10$	20
$-10 < N \leqq -8$	22
$-8 < N \leqq -6$	24
$-6 < N \leqq -4$	26
$-4 < N \leqq -2$	28
$-2 < N \leqq 0$	30
$0 < N \leqq 2$	32
$2 < N \leqq 4$	34
$4 < N \leqq 6$	36
$6 < N \leqq 8$	38
$8 < N \leqq 10$	40
$10 < N \leqq 12$	42
$12 < N \leqq 14$	44
$14 < N \leqq 16$	46
$16 < N \leqq 18$	48
$18 < N \leqq 20$	50
$20 < N \leqq 22$	52
$22 < N \leqq 24$	54
$24 < N \leqq 26$	56
$26 < N \leqq 28$	58
$28 < N \leqq 30$	60

(2)　Manual 設定

高調波でないスプリアスや信号の近傍のスプリアスなど微小レベル信号を測定したい場合，Manual で入力アッテネータを設定してください。
Manual 設定時の入力アッテネータの設定範囲は以下のとおりです。

入力アッテネータの設定範囲，最小設定分解能
入力アッテネータ設定範囲　：　表 2.4.2-3 または表 2.4.2-4 参照
入力アッテネータ最小設定分解能　：　2 dB

表2.4.2-3　入力アッテネータの設定範囲（プリアンプが Off の時）

Attenuator Manual	
下限値	上限値
ロジック* (α=0，β=1，γ=2) ただし，最小値は 0 dB	60 dB

表2.4.2-4　入力アッテネータの設定範囲（プリアンプが On の時）

Attenuator Manual	
下限値	上限値
ロジック* (α=20，β=21，γ=22) ただし，最小値は 0 dB	60 dB

＊：　以下に従います。

① リファレンスレベルが 0 の場合，または 2 で割り切れる場合
Attenuator (dB)=RL*1＋α
② ①以外で INT (RL)*2 が奇数の場合
Attenuator (dB)=INT (RL)*2＋β
③ ①以外で INT (RL)*2 が偶数の場合
Attenuator (dB)=INT (RL)*2＋γ

＊1：リファレンスレベル（dBm）
＊2：リファレンスレベルを超えない最大の整数

操作例：入力アッテネータを 20 dB に設定する

＜手順＞

1. Amplitude を押します。
2. F3 (Attenuator) を押します。
3. 2 0 を押したあと，F1 (dB) を押して，入力アッテネータを設定します。

また，2 次，3 次高調波スプリアスの測定の場合は，ミキサ入力レベルを下げて，内部歪みの影響を除く必要があります。内部歪みは，ミキサ入力レベルが–30 dBm で–75 dB 以下（1 GHz にて）なので，高調波スプリアスを–75 dB まで測定したいときは，ミキサ入力レベルを–30 dBm 以下としなければなりません。この場合，アッテネータの設定が Auto のままだとアッテネータ値が小さすぎるので，Manual でアッテネータ値を設定してください。

2.4.3　スケールの設定

Amplitude ファンクションメニューで F6 （Scale）を押すと，Scale ファンクションメニューが表示されます。

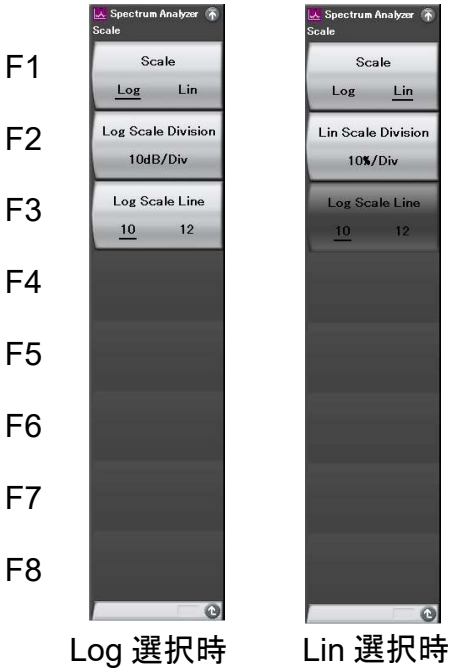

図2.4.3-1　Scale ファンクションメニュー

表2.4.3-1　Scale ファンクションメニューの説明

メニュー表示	機能
Scale (Log/Lin)	スケールモード（Log/Lin）を選択します。
Log Scale Division	スケールレンジ（Log スケールレンジ）を設定します。
Lin Scale Division	スケールレンジ（Lin スケールレンジ）を設定します。
Log Scale Line (10/12)	Log スケール時のスケール線の本数を選択します。

(1) Log スケールの設定

Log スケールは，以下から選択できます。

0.1，0.2，0.5，1.0，2.0，5.0，10.0，20.0 dB/Div

操作例：Log Scale Division を 20 dB/Div，スケール線を 12 本に設定する

＜手順＞

1. [Amplitude] を押します。
2. [F6] (Scale) を押します。
3. [F1] (Scale) を押して，Log を選択します。
4. [F2] (Log Scale Division) を押します。
5. [2] [0] を押したあと，[F1] (dB/Div) を押して，Log Scale Division を設定します。
6. [F3] (Log Scale Line) を押して，12 を選択してスケール線を設定します。

(2) Lin スケールの設定

Lin スケールは，以下から選択できます。

1，2，5，10%/Div

操作例：Lin Scale Division を 5%/Div に設定する

＜手順＞

1. [Amplitude] を押します。
2. [F6] (Scale) 押します。
3. [F1] (Scale) 押して，Lin を選択します。
4. [F2] (Lin Scale Division) を押します。
5. [5] を押したあと，[F1] (%/Div) を押して，Lin Scale Division を設定します。

2.4.4　リファレンスレベルの単位の設定

Log スケールモードでレベル表示単位を選択します。Lin スケールの場合は，V 固定です。

リファレンスレベルの表示単位

dBm，dBμV，dBmV，V，W，dBμV (emf)，dBμV/m

操作例：リファレンスレベルを 10 dBmV に設定する

＜手順＞

1. Amplitude を押します。
2. F6 (Scale) を押します。
3. F1 (Scale) を押して，Log を選択します。
4. を押すと，元のメニューに戻ります。
5. F5 (Log Scale Unit) 押して，F3 (dBmV) を押します。
6. 1 0 を押したあと，F1 (dBmV) を押して，リファレンスレベルの単位を設定します。

表示単位が V または W のとき，測定結果が 99.999 GV または 99.999 GW を超えた場合は 99.999 GV または 99.999 GW を表示します。

2.4.5　リファレンスレベルオフセットの設定

任意のオフセット値を加算して，トレースを表示します。

リファレンスレベルオフセットの設定範囲，最小設定分解能

リファレンスレベルオフセット設定範囲	–100～100 dB
リファレンスレベルオフセット最小設定分解能	0.01 dB

図2.4.5-1　オフセット値の加算

操作例：リファレンスレベルオフセット値を 10 dB に設定する

＜手順＞

1. [Amplitude] を押します。
2. [F7] (Offset) を押して，On を選択します。
3. [F8] (Offset Value) を押します。
4. [1] [0] を押したあと，[F1] (dB) を押して，リファレンスレベルオフセットを設定します。

2.4.6　プリアンプ

注:

本機能はオプション 008 6GHz プリアンプ実装時のみ設定できます。

プリアンプを On にすることで，レベル感度を向上させることができます。

操作例: プリアンプを On に設定する

＜手順＞

1. Amplitude を押します。
2. F4 (Pre-amp) を押して，On に設定します。

2.4.7 インピーダンスの設定

入力インピーダンス(50 Ω/75 Ω)を設定します。初期値は 50 Ωです。

縦軸が電圧単位の場合(dBμV, dBmV, V, dBμV (emf), dBμV/m) に本設定が影響します。電力単位(dBm, W)の場合には影響しません。本器の実際の入力インピーダンスは 50 Ωです。インピーダンスを 75 Ωに設定した場合は, 75 Ω終端として数値換算を行い, 電圧単位の表示値へ反映します。

75/50 Ω変換アダプタを使用する場合は, インピーダンスを 75 Ωに設定してください。変換アダプタの損失は, 本器の Correction 機能やリファレンスレベルオフセット設定を使用して, 補正することが可能です。

操作例: インピーダンスを 75 Ωに設定する

＜手順＞

1. Amplitude を押します。
2. ➔を押します。Amplitude ファンクションメニューの 2 ページ目を表示させたあとに, F1 (Impedance) を押して, 75 Ωに設定します。

2.4.8 マイクロ波プリセレクタバイパス

注:

本機能はオプション 067 マイクロ波プリセレクタバイパスを実装しているとき設定できます。

プリセレクタバイパスを On にすることで 6 GHz 以上のプリセレクタバンドにおいて周波数特性を向上させることができます。

操作例: プリセレクタバイパスを On に設定する

＜手順＞

1. Frequency または Amplitude を押します。
2. ➔を押し, Frequency または Amplitude ファンクションメニューの 2 ページを表示させます。
3. F8 (Micro Wave Preselector Bypass)を押して On に設定します。

2.5　RBW/VBW の設定

分解能帯域幅（RBW）およびビデオ帯域幅（VBW）を，Auto または任意に選択します。

メインファンクションメニューで F4 （BW）を押す，あるいは BW を押すと，BW ファンクションメニューが表示されます。

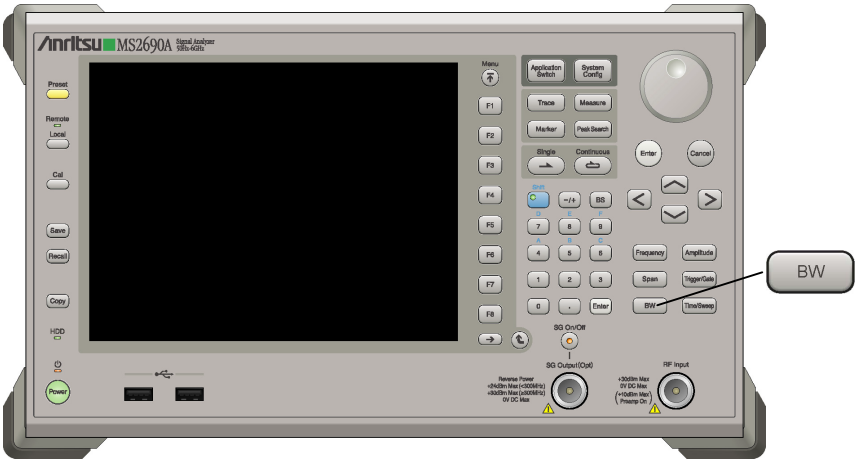

図2.5-1　BW キー

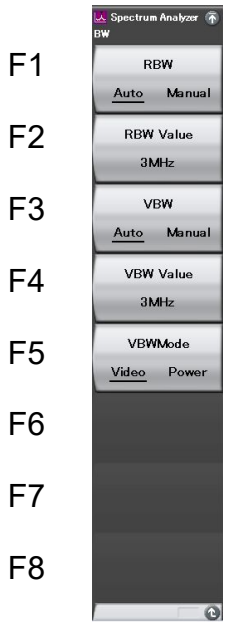

図2.5-2　BW ファンクションメニュー

表2.5-1　BW ファンクションメニューの説明

メニュー表示	機能
RBW (Auto/Manual)	分解能帯域幅（RBW）の自動設定・手動設定を選択します。 ☞ 2.5.1 分解能帯域幅（RBW）の設定
RBW Value	分解能帯域幅（RBW）を選択します。 ☞ 2.5.1 分解能帯域幅（RBW）の設定
VBW (Auto/Manual)	ビデオ帯域幅（VBW）の自動設定・手動設定を選択します。 ☞ 2.5.2 ビデオ帯域幅（VBW）の設定
VBW Value	ビデオ帯域幅（VBW）を設定します。 ☞ 2.5.2 ビデオ帯域幅（VBW）の設定
VBW Mode (Video/Power)	ビデオ帯域幅（VBW）による表示レベル平滑化の方法を選択します。 ☞ 2.5.3 Video VBW/Power VBW の設定

2.5.1　分解能帯域幅（RBW）の設定

分解能帯域幅（RBW）の自動設定・手動設定を選択します。

Auto

周波数スパンの設定に応じて自動的に設定されます。

Manual

任意に分解能帯域幅（RBW）を選択します。近接した 2 つの信号を観測するときなどに，分解能帯域幅（RBW）を小さくすることで周波数分解能を上げることができます。同時に雑音レベルを減少させる効果も得られます。

分解能帯域幅（RBW）の値は，以下から選択できます。

30 Hz，100 Hz，300 Hz，1 kHz，3 kHz，10 kHz，30 kHz，50 kHz，
100 kHz，300 kHz，1 MHz，3 MHz，5 MHz，10 MHz，20 MHz，
31.25 MHz（ただし，31.25 MHz は 0 span 時のみ設定可）

注:

31.25 MHz はガウシアンフィルタではなく，フラットトップ特性のフィルタです。Couple Time/Frequency Domain が Off の時は，本パラメータは周波数軸測定と時間軸測定で独立した値をとります。

<u>分解能帯域幅（RBW）の設定</u>

操作例：分解能帯域幅（RBW）を 10 kHz に設定する

＜手順＞

1. [BW] を押します。
2. [F2]（RBW Value）を押します。
3. [1] [0] を押したあと，[F3]（kHz）を押して，分解能帯域幅（RBW）を設定します。

2.5.2　ビデオ帯域幅（VBW）の設定

ビデオ帯域幅（VBW）の自動設定・手動設定を選択します。

検波モード（Detection）が“RMS”の場合，VBW（Auto/Manual）は変更できません。

Auto
　分解能帯域幅（RBW）と同じ，または最も近い値に設定されます。

Manual
　分解能帯域幅（RBW）より小さい値に設定することで，ノイズの平均化を効率よく行うことができます。

ビデオ帯域幅（VBW）の値は，以下から選択できます。
　1 Hz，3 Hz，10 Hz，30 Hz，100 Hz，300 Hz，1 kHz，3 kHz，5 kHz，10 kHz，30 kHz，100 kHz，300 kHz，1 MHz，3 MHz，10 MHz，Off

Couple Time/Frequency Domain が Off の時は，本パラメータは周波数軸測定と時間軸測定で独立した値をとります。

<u>ビデオ帯域幅（VBW）の設定</u>

操作例：ビデオ帯域幅（VBW）を 10 kHz に設定する
＜手順＞

1. [BW] を押します。
2. [F4]（VBW Value）を押します。
3. [1] [0] を押したあと，[F3]（kHz）を押して，VBW を設定します。

2.5.3　Video VBW/Power VBWの設定

本アプリケーションは，管面表示を平滑化するためのビデオフィルタとして Video VBW と Power VBW の 2 通りが選択できます。

検波モード（Detection）が“RMS”の場合，VBW Mode（Video/Power）に関わらず Power VBW の処理となります。

2 つの VBW Mode の違い

Video VBW

ビデオフィルタによる平滑・平均化処理を対数圧縮後（対数平均）に行います。

Power VBW

ビデオフィルタによる平滑・平均化処理を対数圧縮前（真数平均）に行います。

Video VBW は従来のスペクトラムアナライザと同様の測定値を示しますが，バースト波など時間変動が大きい信号では誤差が大きくなります。このような信号の測定を行うには，Power VBW を使用します。

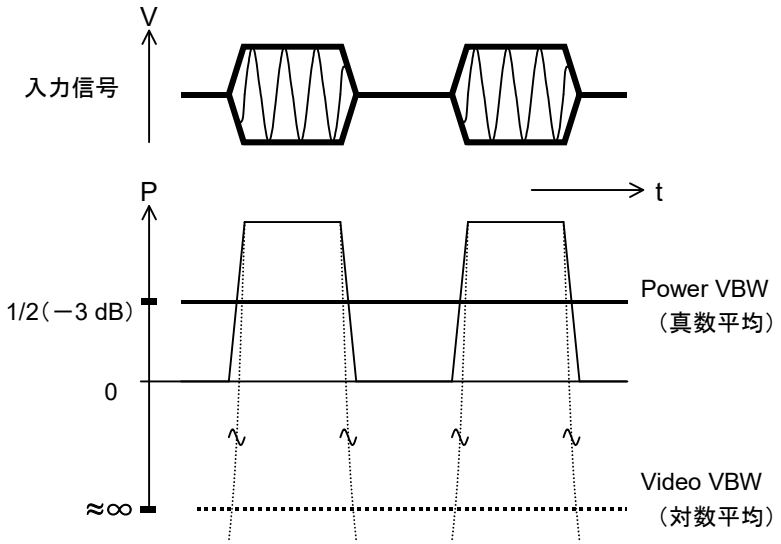

図2.5.3-1　Power VBW と Video VBW

操作例：Power VBW に設定する

＜手順＞

1. BW を押します。
2. F5（VBW Mode）を押して，Power を選択します。

第3章　表示モードの選択

この章では，トレース，ストレージモード，および検波モードについて説明します。

3.1　ストレージモードの設定 3-2
3.1.1　ストレージモードの種類 3-4
3.1.2　アベレージング機能 3-5
3.1.3　Max Hold/Min Hold 機能 3-6
3.1.4　検波モードの設定 3-7
3.1.5　トレースの表示と更新 3-9
3.2　Limit 機能の設定 3-10
3.2.1　Limit 機能パラメータの設定 3-11
3.2.2　Limits の設定 3-12
3.2.3　Limit1～6 の設定 3-13
3.2.4　Edit パラメータ 3-16
3.2.5　Limit Envelope 機能 3-20
3.2.6　Limit ファイルの保存 3-23
3.2.7　Limit ファイルの読み込み 3-25
3.3　Time/Sweep の設定 3-27
3.3.1　Sweep Time の設定 3-29
3.3.2　トレースポイントの設定 3-30
3.4　Save on Event 3-31
3.4.1　Save on Event の設定 3-31
3.4.2　Save on Event の Waveform ファイル 3-32
3.4.3　Save on Event の Waveform ファイルの削除 3-33

3.1　ストレージモードの設定

メインファンクションメニューで F6 (Trace)を押す，あるいは Trace を押すと，Trace ファンクションメニューが表示されます。

図 3.1-1　Trace キー

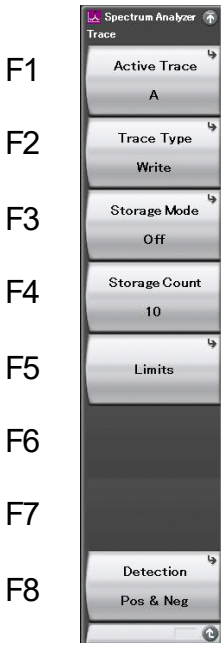

図 3.1-2　Trace ファンクションメニュー

表 3.1-1　Trace ファンクションメニュー

メニュー表示	機能
Active Trace	設定対象のトレースを選択します。Trace Type，Storage Mode はトレースごとに独立の設定ができます。
Trace Type	トレースの表示と更新に関係した設定をします。 ☞ 3.1.5 トレースの表示と更新
Storage Mode	ストレージモードの種類を設定します。 ☞ 3.1.1 ストレージモードの種類
Storage Count	ストレージの回数を設定します。 ☞ 3.1.2 アベレージング機能
Limits	Limit Line を設定します。 ☞ 3.2 Limit 機能の設定
Detection	検波モード（Pos&Neg，Positive，Sample，Negative，RMS）を選択します。 ☞ 3.1.4 検波モードの設定

3.1.1　ストレージモードの種類

トレース A, トレース B, トレース C, トレース D, トレース E, およびトレース F について，以下のストレージモードが選択できます。

表 3.1.1-1　ストレージモードの種類

モード	表示	説明	表示例
Lin Average	Lin	Log 表示モードにおいて Linear 値における平均化処理を行い，結果は Log で表示されます。	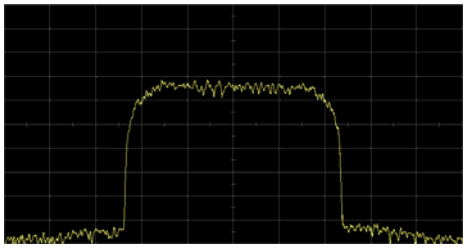
Max Hold	Max	掃引ごとに，以前の各横軸ポイントのトレースデータと新しいトレースデータの比較を行い，大きい方を表示します。	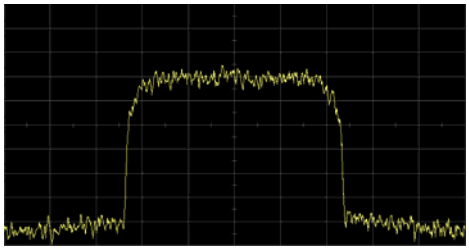
Min Hold	Min	掃引ごとに，以前の各横軸ポイントのトレースデータと新しいトレースデータの比較を行い，小さい方を表示します。	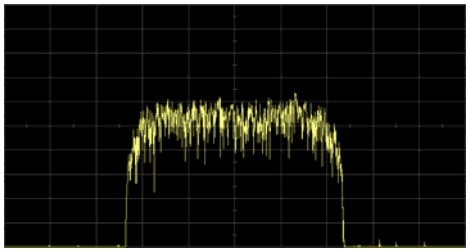
Average	Avg	掃引ごとに，各横軸のポイントにおいて，平均化の演算を行い，その結果を表示します。 S/N の改善に用います。	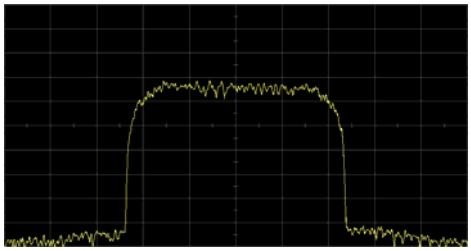
Off	Off	掃引ごとにトレースデータを更新し，表示します。通常の測定に使います。	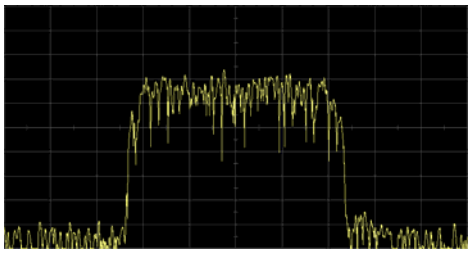

ストレージモードの表示は図 3.1.4-2 を参照してください。トレースパラメータに表示されます。

3.1.2　アベレージング機能

平均化したトレースを表示します。

操作例:　　トレース A を Average, ストレージ回数を 100 に設定する

＜手順＞

1. Trace を押します。
2. F1 (Active Trace)を押して, F1 (A)を押します。
3. F3 (Storage Mode)を押して, F4 (Average)を選択します。
4. F4 (Storage Count)を押します。
5. 1 0 0 を押したあと, F7 (Set)を押して, ストレージ回数を設定します。

表 3.1.2-1 に平均化の演算方法を示します。

表 3.1.2-1　アベレージング指数＝N の場合

掃引回数	測定値 M(n)	表示値
1	M(1)	$Y(1)=M(1)$
2	M(2)	$Y(2)=Y(1)+\frac{M(2)-Y(1)}{2}$
3	M(3)	$Y(3)=Y(2)+\frac{M(3)-Y(2)}{3}$
…	…	…
N−1	M(N−1)	$Y(N-1)=Y(N-2)+\frac{M(N-1)-Y(N-2)}{N-1}$
N	M(N)	$Y(N)=Y(N-1)+\frac{M(N)-Y(N-1)}{N}$
N+1	M(N+1)	$Y(N+1)=Y(N)+\frac{M(N+1)-Y(N)}{N}$
N+2	M(N+2)	$Y(N+2)=Y(N+1)+\frac{M(N+2)-Y(N+1)}{N}$
…	…	…

ストレージ回数の表示は図 3.1.4-2 を参照してください。トレースパラメータに表示されます。

Spectrum Emission Mask 測定以外の表示

Spectrum Emission Mask 測定時の表示は%表示となります。

3.1.3　Max Hold/Min Hold機能

トレースデータの最大値(Max Hold)または最小値(Min Hold)を保持して表示します。

操作例:　　トレース A を Max Hold に, トレース B を Min Hold に設定して, 同時に表示するように設定する

＜手順＞

1. [Trace] を押します。
2. [F1](Active Trace)を押して, [F1](A)を押します。
3. [F2](Trace Type)を押して, [F1](Write)を押します。
4. [F3](Storage Mode)を押して, [F2](Max Hold)を選択します。
5. [F1](Active Trace)を押して, [F2](B)を押します。
6. [F2](Trace Type)を押して, [F1](Write)を押します。
7. [F3](Storage Mode)を押して, [F3](Min Hold)を選択します。

3.1.4　検波モードの設定

表 3.1.4-1 の検波モードから選択します。Couple Time/Frequency Domain が Off のときは，本パラメータは周波数軸測定と時間軸測定で独立した値をとります。

表 3.1.4-1　検波モード

検波モード	説明
Pos&Neg	サンプルポイント間の最大値と最小値を結んだ直線を表示します。
Positive	サンプルポイント間の最大値を表示します。
Negative	サンプルポイント間の最小値を表示します。
Sample	サンプルポイント間の瞬時値を表示します。
RMS	サンプルポイント間の 2 乗平均値（実効値）を表示します。

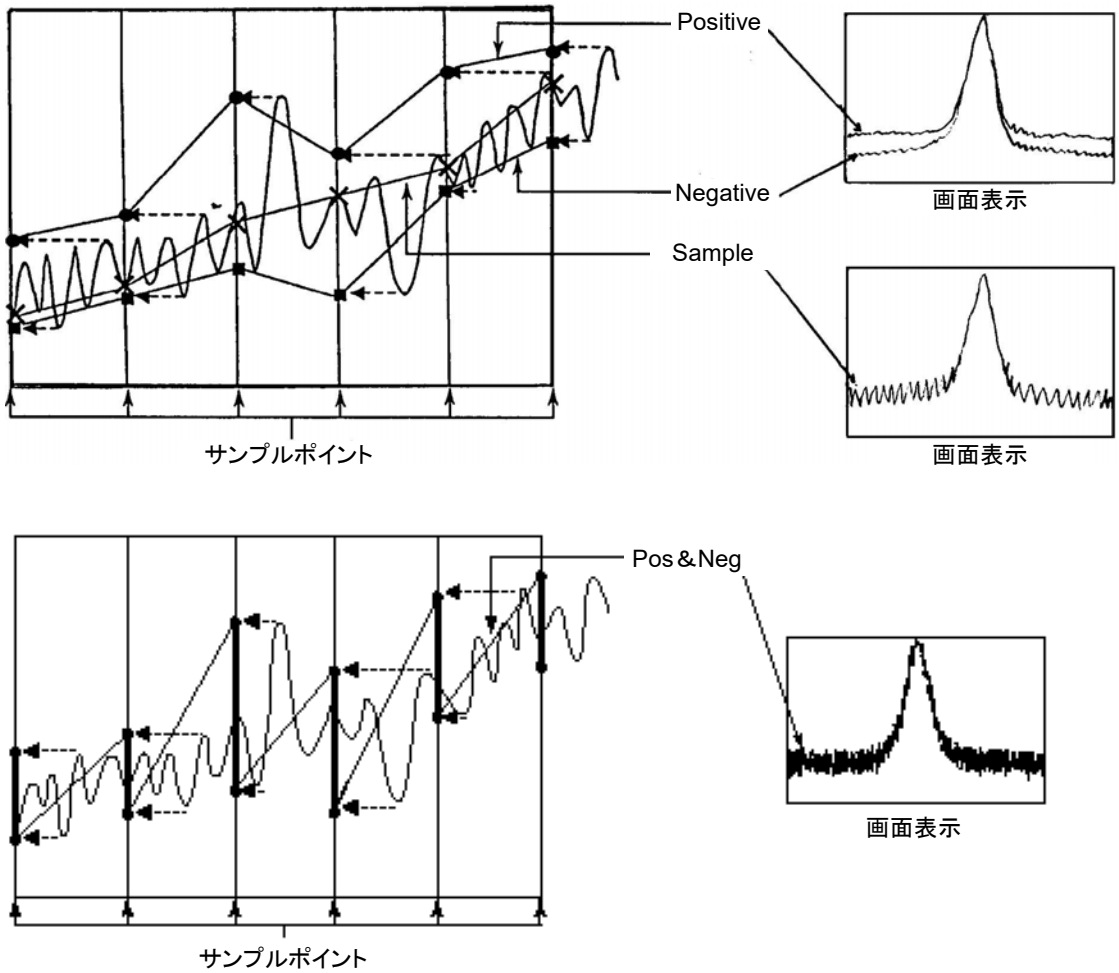

図 3.1.4-1　各検波モードにおける画面表示の違い

操作例:　　検波モードを Negative に設定する

＜手順＞

1. Trace を押します。

2. F8 (Detection)を押して, F3 (Negative)を押します。

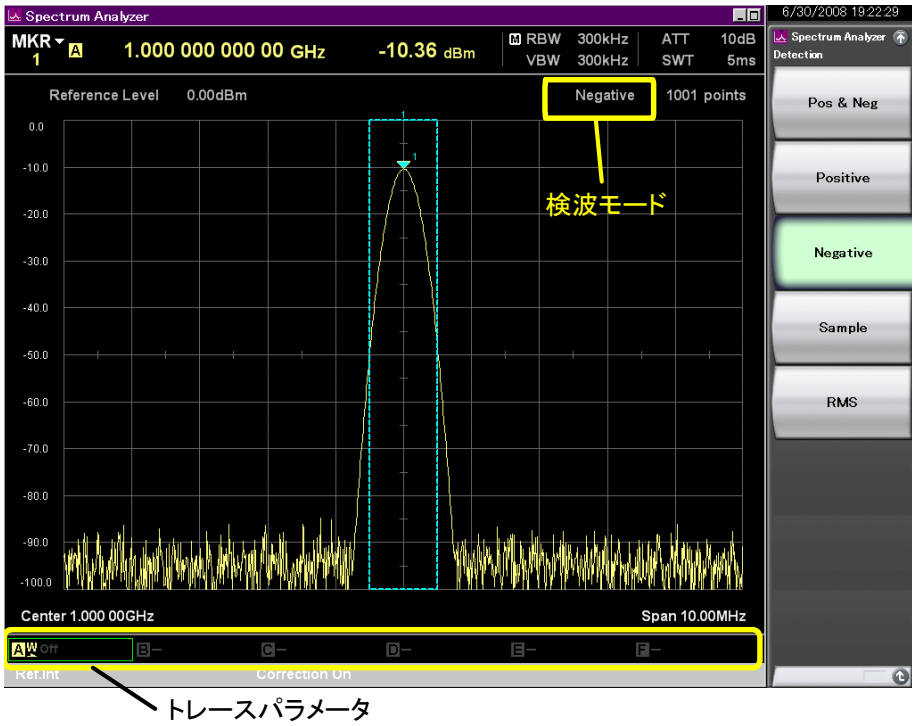

図 3.1.4-2　検波モードの選択

3.1.5　トレースの表示と更新

トレースの書き込み方式を設定します。表 3.1.5-1 の各モードから選択できます。

表 3.1.5-1　トレースの書き込み方式

トレースの書き込み方式	表示	説明
Write	W	測定ごとに表示の更新を行います。
View	V	測定を行っても表示の更新を行わず，現在の表示を維持します。
Blank	–	トレースの表示を行いません。

トレースの書き込み方式の表示は図 3.1.4-2 を参照してください。トレースパラメータに表示されます。

3.2　Limit 機能の設定

Limit Line を引いてトレースデータを評価する機能です。

注:

- Measure 機能が ON のとき, Limit 機能は使用できません。
- Amplitude ファンクションメニューの Scale を Lin にした場合, Limit Test は判定を行いません。Limit Test の表示は,「*** LIMITn」表示となります。

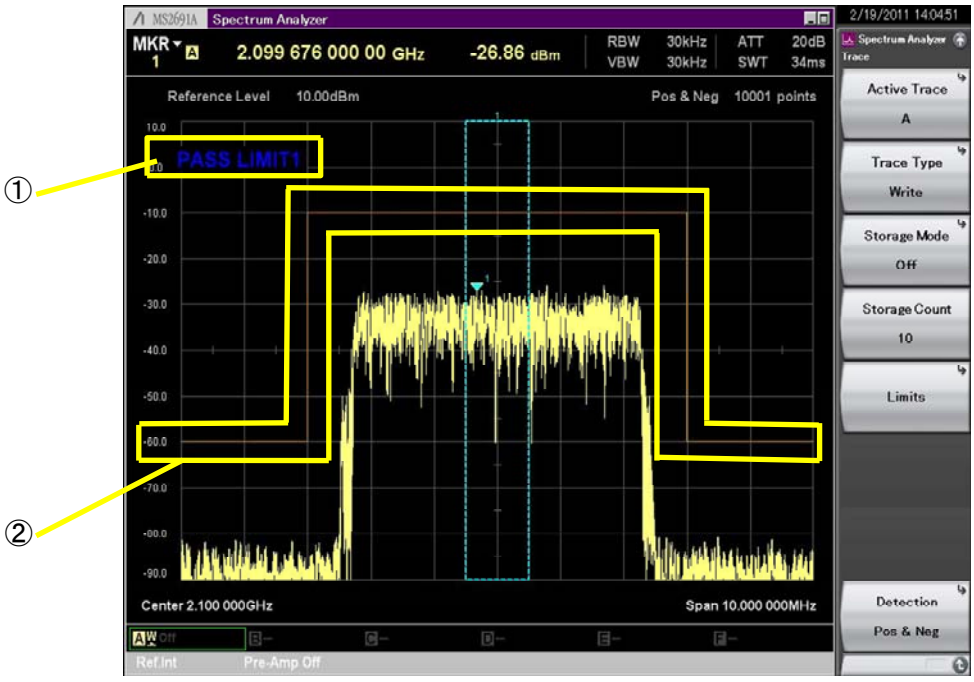

図 3.2-1　Limit Line 画面表示

表 3.2-1　Limit 機能表示項目

番号	表示	内容
①	Limit Test	Limit Line を超えたか超えてないかで Pass/Fail の判定が表示されます。
②	Limit Line	Limit Line が表示されます。

3.2.1　Limit機能パラメータの設定

メインファンクションメニューで F5(Trace)を押す，あるいは Trace を押すと，Trace ファンクションメニューが表示されます。Trace ファンクションメニューで F5(Limits)を選択すると Limits ファンクションメニューが表示されます。

操作例：1 GHz～2 GHz の間に–20 dBm の Limit Line を引くように設定して，Limit Line を超えたら Fail と表示するように設定する

＜手順＞

1. Trace を押します。
2. F5(Limits)を押します。
3. F1(Limit1)を押します。
4. →を押しページ 2 を表示します。F1(Limit Line Type (Frequency))を押して，Abs を選択します。
5. F2(Limit Line Type (Amplitude))を押して，Abs を選択します。
6. →を押しページ 1 を表示します。F1(Type)を押して，Upper に設定します。
7. F2(Limit Display)を押して，On に設定します。
8. F3(Limit Test)を押して，On に設定します。
9. F6(Edit)を押して，F1(Point)を押します。
10. 1を押して，Point1 に設定します。
11. F3(Frequency)が表示されていないときは，F2(Add Point)を押します。
12. F3(Frequency)を押します。
13. 1を押したあと，F1(GHz)を押して Frequency を設定します。
14. F4(Amplitude)を押します。
15. –/+ 2 0を押し，F1(dBm)を押して Amplitude を設定します。
16. F2(Add Point)を押します。
17. F3(Frequency)を押します。
18. 2を押したあと，F1(GHz)を押して Frequency を設定します。
19. F4(Amplitude)を押します。
20. –/+ 2 0を押し，F1(dBm)を押して Amplitude を設定します。
21. F5(Connected to Previous Pt)を押して On に設定し，Point1 と Point2 を線でつなぎます。

3.2.2　Limitsの設定

Trace ファンクションメニューで F5 (Limits)を選択すると Limits ファンクションメニューが表示されます。6 種類の Limit Line を設定できます。

表 3.2.2-1　Limits ファンクションメニューの説明

ファンクションキー	メニュー表示	機能
F1	Limit1	Limit Line 1 を設定します。 ☞ 3.2.3　Limit1～6 の設定
F2	Limit2	Limit Line 2 を設定します。 ☞ 3.2.3　Limit1～6 の設定
F3	Limit3	Limit Line 3 を設定します。 ☞ 3.2.3　Limit1～6 の設定
F4	Limit4	Limit Line 4 を設定します。 ☞ 3.2.3　Limit1～6 の設定
F5	Limit5	Limit Line 5 を設定します。 ☞ 3.2.3　Limit1～6 の設定
F6	Limit6	Limit Line 6 を設定します。 ☞ 3.2.3　Limit1～6 の設定
F8	Delete All Limits	Limit Line 1～6 のすべての Point の設定値を削除します。

3.2.3　Limit1～6の設定

Limits ファンクションメニューで F1 (Limit1)～ F6 (Limit6)を選択すると，Limit1～Limit6 のファンクションメニューが表示されます。

表 3.2.3-1　Limit1～6 ファンクションメニュー

ファンクションキー	メニュー表示	機能
ページ 1	Limit1～Limit6	Limits ファンクションメニューで F1 (Limit1) ～ F6 (Limit6)を押します。
F1	Type	Limit Line の種類を設定します。 Upper：上限値（初期値） Lower：下限値
F2	Limit Display	Limit Line の表示・非表示を設定します。 On：　表示 Off：　非表示（初期値）
F3	Limit Test	Limit Line による判定をする・しないを設定します。 On：　判定を行う Off：　判定を行わない（初期値）
F4	Margin	Limit Line に Offset を加えた Margin 線を設定します。 On：　表示 Off：　非表示（初期値）
F5	Margin Value	Margin 線に加える Offset 値を設定します。 設定範囲：　–40.00～0.00 (Upper) 0.00～40.00 (Lower) 最小設定分解能：　0.01 dB ロータリノブ分解能：　0.1 dB ステップキー分解能：　1 dB 初期値：0 dB
F6	Edit	Limit Line の各 Limit Point を設定します。 ☞ 3.2.4　Edit パラメータ
F7	Envelope	Envelope-Limit x ファンクションメニューを表示します。 ☞ 3.2.5　Limit Envelope 機能
F8	Test Trace*	テスト対象 Trace を設定します。 選択肢：A,B,C,D,E,F 初期値：A

＊：　Limit1～6 ファンクションメニューを選択すると，Trace ファンクションメニューの F1：Active Trace の値が自動的に設定されます。

表 3.2.3-1　Limit1～6 ファンクションメニュー(続き)

ファンクションキー	メニュー表示	機能
ページ 2	Limit1～Limit6	Limits ファンクションメニューで F1 (Limit1)～F6 (Limit6)を押し，→を押すと表示されます。
F1	Limit Line Type (Frequency)	Limit Line の周波数軸の設定方法を設定します。 Abs：周波数の絶対値(Absolute)を設定 Rel：Center Frequency を基準とした相対値(Relative)を設定（初期値）
F2	Limit Line Type (Amplitude)	Limit Line のレベル軸の設定方法を設定します。 Abs：絶対レベル(Absolute)を設定（dBm）（初期値） Rel：Reference Level を基準とした相対値(Relative)を設定（dB）
F4	Save Limit x	Save Limit ファンクションメニューを開きます。 ☞ 表 3.2.6-2 Save Limit ファンクションメニュー
F5	Recall Limit x	Recall Limit1～6 ファンクションメニューを開きます。 ☞ 表 3.2.7-3 Recall Limit1～6 ファンクションメニュー
F7	Mirror Limit	右半分の設定を左半分にコピーする(On)，しない(Off：初期値)を設定します。 Limit Line Type（Frequency）が Rel の時，設定できます。

(1)　Limit Line の表示形式の選択

操作例：Limit1 を上限値(Upper Limit)表示，Limit Line を表示するようにして Limit Line による判定結果を表示する

＜手順＞

1. Trace を押します。
2. F5 (Limits)を押します。
3. F1 (Limit1)を押します。
4. F1 (Type)を押して Upper に設定します。
5. F2 (Limit Display) を押して On に設定します。
6. F3 (Limit Test)を押して On に設定します。

Limit Test の詳細

- Type が Upper の場合 Limit Line を上回ったらテスト結果が Fail になります。
- Type が Lower の場合 Limit Line を下回ったらテスト結果が Fail になります。

(2)　Margin 機能

操作例：設定した Limit Line に–20 dB 加えた Margin 線を表示する

＜手順＞

1. [Trace] を押します。
2. [F5] (Limits)を押します。
3. [F1] (Limit1)を押します。
4. [F4] (Margin)を押して On に設定します。
5. [F5] (Margin Value) を押します。
6. [–/+] [2] [0] を押し，[F1] (dB)を押して Margin Value を設定します。

3.2.4　Editパラメータ

Limit1～6 ファンクションメニューで F6 (Edit)を選択すると Edit-Limit x ファンクションメニューが表示されます。

Limit Line の各 Limit Point を設定します。

表 3.2.4-1　Edit-Limit x ファンクションメニューの説明

ファンクションキー	メニュー表示	機能
F1	Point	Edit する Limit Point を指定します。
F2	Add Point	現在の Limit Point の右側に同一周波数，同一レベルの Limit Point を追加します。
F3	Frequency*	Limit Point の周波数を設定します。
F4	Amplitude*	Limit Point のレベルを設定します。
F5	Connected to Previous Pt(On/Off)*	Pt(Limit Point)間を線形補間する(On) しない(Off)を設定します。現在選択している Limit Point とその左の Limit Point 間を線形補間し，Pass/Fail 判定します。
F6	Previous Pt Level Offset*	Pt (Limit Point) 間を線でつなげる場合，現在の Limit Point でのオフセットを設定します。
F7	Delete Point	現在選択している Limit Point を削除します。
F8	Delete Limit	Limit x のすべての Limit Point を削除します。

＊:　F3～F6 は，Limit Point の数が 0 のとき，表示されません。

(1)　Point の設定

Point

設定範囲	:	1～Limit Point (最大 100)
最小設定分解能	:	1
ロータリノブ分解能	:	1
ステップキー分解能	:	1

(2)　Frequency の設定

操作例:Frequency を 1 GHz に設定する

＜手順＞

1. Trace を押します。
2. F5 (Limits)を押します。
3. F1 (Limit1)を押します。
4. F6 (Edit)を押します。
5. F2 (Frequency Offset)を押します。
6. 1 を押したあと，F1 (GHz)を押して Frequency を設定します。

Frequency

Limit Line Type (Frequency)が Abs の場合

設定範囲:　0～325 GHz

初期値: Start Frequency
最小設定分解能: 1 Hz
ロータリノブ分解能: 周波数スパンの 1/10000
ステップキー分解能: ステップサイズ

Limit Line Type (Frequency)が Rel の場合

設定範囲: –100～100 GHz
初期値: 0 Hz
最小設定分解能: 1 Hz
ロータリノブ分解能: 周波数スパンの 1/10000
ステップキー分解能: ステップサイズ

2.3.2 周波数スパンの設定
2.3.8 ステップサイズの設定

注:

- Frequency の値が逆転する Limit Point があるときは Limit Point の順番が自動的に入れ替わります。
- Limit Line Type (Frequency) の切り替えによって, 設定範囲を超えた値を読み出すことがあります。

(3) Amplitude の設定

操作例:Amplitude を–10 dBm に設定する

＜手順＞

1. [Trace] を押します。
2. [F5](Limits)を押します。
3. [F1](Limit1)を押します。
4. [F6](Edit)を押します。
5. [F4](Amplitude)を押します。
6. [–/+] [1] [0]を押し, [F1](dBm)を押して Amplitude を設定します。

Amplitude

Limit Line Type (Amplitude)が Abs の場合

設定範囲: –300.00～300.00 dBm
初期値: Reference Level
最小設定分解能: 0.01 dBm
ロータリノブ分解能: 1 dBm
ステップキー分解能: 10 dBm

Limit Line Type (Amplitude)が Rel の場合

設定範囲: –300.00～300.00 dB
初期値: 0 dB
最小設定分解能: 0.01 dB
ロータリノブ分解能: 1 dB
ステップキー分解能: 10 dB

注:

Limit Line Type (Amplitude) の切り替えによって，設定範囲を超えた値を読み出すことがあります。

(4)　Connected to Previous Pt

1 Point 左の Limit Point と現在の Limit Point 間を線形補間することにより，Limit Point 間の Pass/Fail 判定をします。Margin を加えた場合の線形補間も行えます。

線形補間あり



線形補間なし



(5)　Previous Pt Level Offset

Limit Point 間を線形補間するとき，Limit Point を基準とした Offset Point(○)との間で線形補間をします。Offset Point(○)は Limit 判定に含まれず，Limit Point(●)で判定されます。

Offset なしの線形補間



Offset 3 dB の場合の線形補間

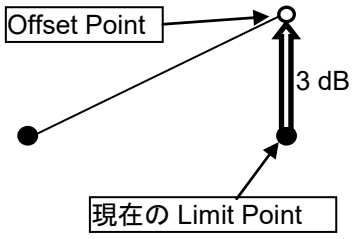

Previous Pt Level Offset

設定範囲:	–300.00～300.00 dB
初期値:	0 dB
最小設定分解能:	0.01 dB
ロータリノブ分解能:	1 dB
ステップキー分解能:	10 dB

(6)　Limit Line 新規作成

＜手順＞

1. F6 (Edit)を押します。
2. F2 (Add Point)を押します。
3. Frequency を設定します。
4. Amplitude を設定します。
5. F5 (Connected to Previous Pt)を押して On/Off を設定します。
6. Previous Pt Level Offset を設定します。
7. 3～6 を繰り返し設定して Limit Point を設定します。

(7)　Limit Line に Limit Point を追加する

＜手順＞

1. F6 (Edit)を押します。
2. F1 (Point)を押します。
3. 追加したい Limit Point の位置までロータリノブを回します。
4. F2 (Add Point)を押します。
5. F3 (Frequency)を押し，周波数を設定します。
6. F4 (Amplitude)を押し，レベルを設定します。
7. F5 (Connected to Previous Pt)を押して On に設定します。
8. F6 (Previous Pt Level Offset)を押し，オフセットを設定します。

3.2.5　Limit Envelope機能

Limit1 ～ 6 ファンクションメニューで F7 (Envelope) を選択すると Envelope-Limit x ファンクションメニューが表示されます。

F4 (Points), F5 (Offset)と F6 (Shape)を設定して, F1 (Create Envelope)を実行すると, 測定結果のトレースデータから, Limit Point と Limit Line を自動生成します。

注:

F1 (Create Envelope), F2 (Update Envelope Amplitude)を実行すると,「3.2.4 Edit パラメータ」で設定された Limit Point は, すべて削除されます。そして, F4 (Points)と F6 (Shape)で設定された数の Limit Point が画面 Span に等間隔で配置されます。

表 3.2.5-1　Envelope-Limit x ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Create Envelope	Limit Line を現在のトレースデータから自動生成します。 Mirror Limit が On のとき, 実行できません。
F2	Update Envelope Amplitude	Fail 判定となった Trace Point の部分のみ Limit Point を現在のトレースデータから自動生成します。 Mirror Limit が On のとき, 実行できません。 Shape が Square のとき, Limit Line を Edit した後は, 実行できません。
F4	Points	Limit Line を自動生成する際の Envelope Point 数を設定します。 Create Envelope を実行すると, Envelope Point に反映されます。
F5	Offset	現在の Trace Point のピーク値から Limit Point までのオフセットレベルを設定します。 Create Envelope または Update Envelope を実行すると, Offset 値が反映されます。
F6	Shape	Limit Line の形状を設定します。 Create Envelope を実行すると, 設定が反映されます。Mirror Limit が On のとき, 設定できません。 Slope:　Limit Point 間を直線で結ぶ（初期値） Square:　Limit Point 間を縦横の線で結ぶ

Create Envelope

例: Type: Upper, Trace Points: 15, Points: 3, Offset: 5 dB, Shape: Slope とした場合

Trace Point(●), Trace Point 値のピーク値(←→), オフセット値(↑)に対して自動生成される Limit Line(—)と Limit Point(○)は下記となります。

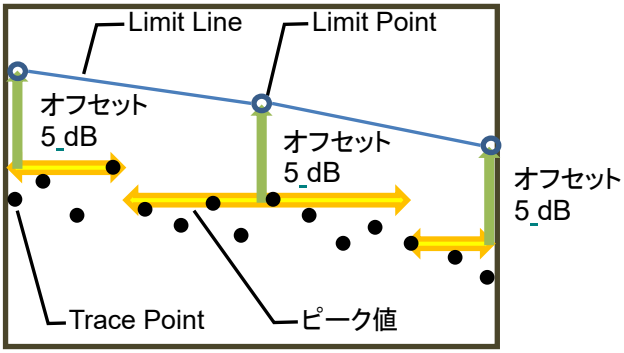

Update Envelope Amplitude

例: Type: Upper, Trace Points: 15, Points: 3, Offset: 5 dB, Shape: Slope として測定し Pass/Fail 判定で Trace Point(●)が Fail となった場合

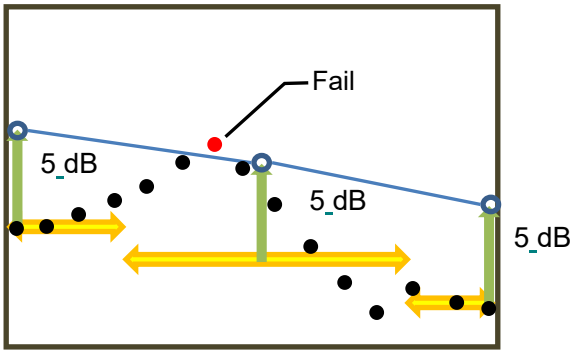

Update Envelope Amplitude を実行すると, Fail となった Trace Point を含んだ Limit Point の Level を再演算します。

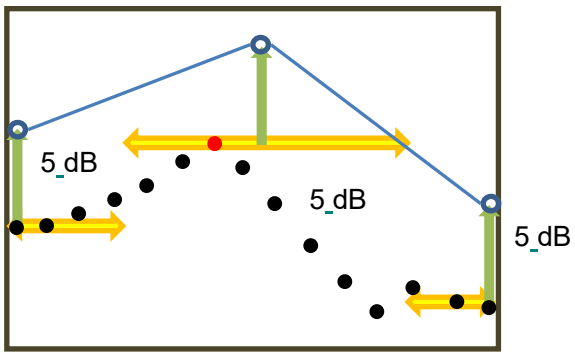

Points

設定範囲:	2～(Trace Point –2)×2+2,	(最大 100) (Slope 時)
	2～Trace Point,	(最大 100) (Square 時)
初期値:	41	
分解能:	1 (Slope 時), 2 (Square 時)	

Shape

Shape が Slope のとき

Limit Point 数(○)は，F4(Points)で設定した Envelope Point 数と同じです。Limit Line(—)は，Limit Point(○)を直線でつないだ線となります。

例　　Envelope Point 数 ＝5 の場合

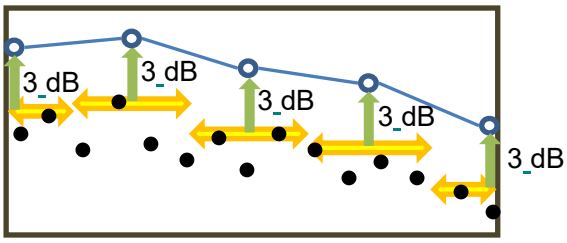

Shape が Square のとき

Limit Point 数(○)は，F4(Points)で設定した Envelope Point(▲)の数により，下記となります。Limit Line(—)は，Envelope Point(▲)を直線でつないだ線となります。

例 Envelope Point が

奇数の場合　Limit Point 数 ＝(Envelope Point 数+1)/2

偶数の場合　Limit Point 数 ＝(Envelope Point 数)/2

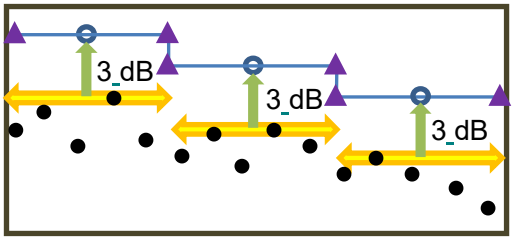

3.2.6　Limitファイルの保存

Spectrum Analyzer 画面を表示しているとき，Save を押すと，表 3.2.6-1 の Save ファンクションメニューが表示されます。

表 3.2.6-1　Save ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Device	保存先のドライブを選択します。
F3	Save Limit	Save Limit ファンクションメニューを表示します。 ☞ 表 3.2.6-2　Save Limit ファンクションメニュー
F4	Save on Event	イベント発生によって，トレースデータを保存します。Save on Event ファンクションメニューを表示します。 Measure 機能が ON のときは，使用できません。 ☞ 表 3.4-1　Save on Event ファンクションメニュー
F5	Save Waveform CSV DATA	表示されている波形データ（Trace）を保存します。 ☞『MS2690A/MS2691A/MS2692A 本体操作編』第 3 章　共通操作
F7	Save Application	起動しているアプリケーションすべてのパラメータ設定条件を保存します。 ☞『MS2690A/MS2691A/MS2692A 本体操作編』第 3 章　共通操作
F8	Close	以前のファンクションメニューに戻ります。

Save Limit ファンクションメニューでは Limit Line の設定内容をファイルに保存します。

表 3.2.6-2　Save Limit ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Limit1	保存ファイル名を設定し，Limit Line1 の設定内容をファイルに保存します。
F2	Limit2	保存ファイル名を設定し，Limit Line2 の設定内容をファイルに保存します。
F3	Limit3	保存ファイル名を設定し，Limit Line3 の設定内容をファイルに保存します。
F4	Limit4	保存ファイル名を設定し，Limit Line4 の設定内容をファイルに保存します。
F5	Limit5	保存ファイル名を設定し，Limit Line5 の設定内容をファイルに保存します。
F6	Limit6	保存ファイル名を設定し，Limit Line6 の設定内容をファイルに保存します。

Limit1～Limit6

ファンクションキーを押すとダイアログボックスが表示されます。保存するファイル名を設定して，Limit Line の設定内容を保存します。

Limit Line ファイル保存先

< D:¥Anritsu Corporation¥Signal Analyzer¥User Data¥Limit>

Limit Line 保存ファイル名

Limit 日付_連番.xml

(連番は，000～999，フォルダ内ファイル数上限 1000 ファイル)

☞『MS2690A/MS2691A/MS2692A 本体操作編』第 3 章　共通操作

3.2.7　Limitファイルの読み込み

Spectrum Analyzer 画面を表示しているとき，Recall を押すと，表 3.2.7-1 の Recall ファンクションメニューが表示されます。Recall ファンクションメニューでは Limit Line ファイルの読み込み，削除，Waveform ファイルの削除を行います。

表 3.2.7-1　Recall ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Device	ファイルが格納されているドライブを選択します。
F3	Recall Limit	Recall Limit ファンクションメニューを表示します。 ☞ 表 3.2.7-2　Recall Limit ファンクションメニュー
F4	Recall Waveform File	Recall Waveform File ファンクションメニューを表示します。 ☞ 表 3.4.3-1　Recall Waveform File ファンクションメニュー
F6	Recall Current Application	Parameter Save Data List を表示します。 操作対象になっているアプリケーションにのみパラメータ設定条件のリコールを実行するとき使用します。 ☞『MS2690A/MS2691A/MS2692A 本体操作編』第 3 章　共通操作
F7	Recall all Application	Parameter Save Data List を表示します。 Load しているすべてのアプリケーションにパラメータ設定条件のリコールを実行するとき使用します。 ☞『MS2690A/MS2691A/MS2692A 本体操作編』第 3 章　共通操作
F8	Close	以前のファンクションメニューに戻ります。

Recall Limit ファンクションメニューでは，読み込む，または削除する Limit Line を選択します。

表 3.2.7-2　Recall Limit ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Limit1	Recall Limit1 ファンクションメニューを表示します。
F2	Limit2	Recall Limit2 ファンクションメニューを表示します。
F3	Limit3	Recall Limit3 ファンクションメニューを表示します。
F4	Limit4	Recall Limit4 ファンクションメニューを表示します。
F5	Limit5	Recall Limit5 ファンクションメニューを表示します。
F6	Limit6	Recall Limit6 ファンクションメニューを表示します。

Limit Line ファイル読み込み元

< D:¥Anritsu Corporation¥Signal Analyzer¥User Data¥Limit>

または，< D:¥Anritsu Corporation¥Signal Analyzer¥User Data¥Parameter Setting>

Recall できる Limit Line ファイル形式

csv，lim，xml ファイル

Recall Limit1～6 ファンクションメニューでは，読み込む，または削除する Limit Line ファイルを選択します。

表 3.2.7-3　Recall Limit1～6 ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Device	ファイルの格納されているフォルダのデバイスを選択します。
F3	Delete Files	Delete Files ファンクションメニューを表示します。 ☞ 表 3.2.7-4　Delete Files ファンクションメニュー
F8	Recall	Recall ファンクションメニューを表示します。 ☞ 表 3.2.7-5　Recall ファンクションメニュー

Delete Files ファンクションメニューでは，選択した Limit Line ファイルを削除します。

表 3.2.7-4　Delete Files ファンクションメニュー

ファンクションキー	メニュー表示	機能
F3	Select All	すべてのファイルを選択します。
F7	Delete	選択したファイルを削除します。
F8	Cancel	選択状態をキャンセルし，Recall Limit1～6 ファンクションメニューに戻ります。

Recall ファンクションメニューでは，選択した Limit Line ファイルを読み込みます。

表 3.2.7-5　Recall ファンクションメニュー

ファンクションキー	メニュー表示	機能
F7	Set	選択したファイルを読み込みます。
F8	Cancel	選択状態をキャンセルし，Recall Limit1～6 ファンクションメニューに戻ります。

3.3　Time/Sweep の設定

メインファンクションメニューで F8 (Time/Sweep) を押す，あるいは Time/Sweep を押すと，Time/Sweep ファンクションメニューが表示されます。

図 3.3-1　Time/Sweep キー

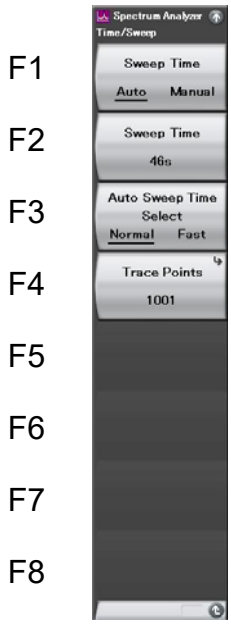

図 3.3-2　Time/Sweep ファンクションメニュー

表 3.3-1　Time/Sweep ファンクションメニュー

メニュー表示	機能
Sweep Time （Auto/Manual）	掃引時間の Auto モードまたは Manual モードを設定します。 ☞ 3.3.1　Sweep Time の設定
Sweep Time	掃引時間を設定します。 ☞ 3.3.1　Sweep Time の設定
Auto Sweep Time Select （Normal/Fast）	掃引時間が Auto の場合の Normal モードまたは Fast モードを設定します。 ☞ 3.3.1　Sweep Time の設定
Trace Points	トレースポイント数を設定します。 ☞ 3.3.2　トレースポイントの設定

3.3.1 Sweep Timeの設定

掃引時間を設定します。Auto に設定すると最適な値が自動的に設定されます。
本パラメータは周波数軸測定と時間軸測定で独立した値をとります。

Sweep Time の設定範囲，設定分解能

設定範囲　2 ms～1000 s（周波数ドメイン時）
　　1 μs～1000 s（タイムドメイン時）

設定分解能　周波数ドメイン時
　　1 ms（2～999 ms）
　　0.1 s（1～9.9 s）
　　1 s（10～1000 s）

　　タイムドメイン時
　　1 μs（1～999 μs）
　　0.1 ms（1～9.9 ms）
　　1 ms（1～999 ms）
　　0.1 s（1～9.9 s）
　　1 s（1～1000 s）

操作例：　Sweep Time の値を 20 s に設定する

＜手順＞

1. [Time/Sweep] を押します。
2. [F2]（Sweep Time）を押します。
3. [2] [0] を押したあと，[F1]（s）を押して，Sweep Time を設定します。

掃引時間を Auto に設定した場合，Normal モード（通常の掃引）／Fast モード（高速な掃引）の設定ができます。

操作例：　掃引時間を Auto にして，Fast モードに設定する

＜手順＞

1. [Time/Sweep] を押します。
2. [F1]（Sweep Time）を押して，Auto を選択します。
3. [F3]（Auto Sweep Time Select）を押して，Fast を選択して，Fast モードに設定します。

3.3.2　トレースポイントの設定

トレースポイントとは波形データの点数です。Couple Time/Frequency Domain が Off のときは，本パラメータは周波数軸測定と時間軸測定で独立した値をとります。以下の範囲で選択できます。

表 3.3.2-1　トレースポイントの設定範囲

設定条件	設定範囲
Span＞500 MHz	1001～30001
100 MHz＜Span≦500 MHz	101～30001
300 Hz≦Span≦100 MHz かつ Sweep Time＞10 s	101～30001
300 Hz≦Span≦100 MHz かつ Sweep Time≦10 s	11～30001
Span = 0 Hz かつ Sweep Time＞10 s	101～30001
Span = 0 Hz かつ Sweep Time≦10 s	11～30001

設定分解能：1 ポイント

操作例：　　トレースポイント数を 2001 に設定する

＜手順＞

1. [Time/Sweep] を押します。
2. [F4]（Trace Points）を押します。
3. [2] [0] [0] [1] を押したあと，[F7]（Set）を押して，トレースポイント数を設定します。

3.4 Save on Event

Spectrum Analyzer 画面を表示しているとき，Save を押し，F4(Save on Event)を押すと，表 3.4.1-1 の Save on Event ファンクションメニューが表示されます。

3.4.1 Save on Eventの設定

Save on Event 機能は F2(Event Type)で設定した Event 種類をトリガに Waveform を保存する機能です。連続してファイルを保存することができます。

注:

- Storage Mode が Off で無い場合，Save on Event による保存は，Storage Count の最終回以降，かつ Storage 結果が Save on Event の Event 条件に一致した場合のみ行われます。
- HDD 容量が残り 1 MB 未満になった場合，停止します。

表 3.4.1-1 Save on Event ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Save on Event	Save on Event 機能を設定します。 On: 保存する Off: 保存しない（初期値）
F2	Event Type	保存を実行する Event を設定します。 Limit Fail: Limit 判定処理が Fail だった場合 Waveform を保存する。(初期値) Limit Pass: Limit 判定処理が Pass だった場合 Waveform を保存する。 Margin Fail: Margin を含む判定処理が Fail だった場合 Waveform を保存する。 Margin Pass: Margin を含む判定処理が Pass だった場合 Waveform を保存する。 Sweep Complete: Limit 判定に関わらず測定実行ごとに Waveform を保存する。
F3	Save then Stop	Save on Event 機能を 1 回のみ行うか，繰り返し行うかを設定します。 On: 1 回 Off: 繰り返し（初期値）
F5	File Name	保存ファイル Folder.csv の内部データである Filename を設定します。 初期値: LIM

File Name

Save on Event 機能実行時に保存される Waveform ファイル Folder.csv の内部データである“Filename”を設定します。(下記の下線部分)

Filename,Date,999.500001 MHz,999.501819 MHz,…,1000.500001 MHz
LIM20140416163123000_R.spa, 4/16/2014 4:31:23 PM, -98.292000, -98.268000,…,-103.104000
LIM20140416163134000_R.spa,4/16/2014 4:31:34 PM,-102.664000,-102.688000,…,-106.108000
⋮

なお，設定しない場合，下記が自動で設定されます。
Event Type が Sweep Complete 以外: LIM
Event Type が Sweep Complete: EOS

3.4.2　Save on EventのWaveformファイル

Save on Event 機能実行時に保存される Waveform ファイルについて説明します。

Waveform ファイルの保存先，読み込み元

パラメータの設定後，測定を開始した日時でフォルダを生成し，そのフォルダ内に複数のデータを持った csv ファイルを作成します。

Waveform ファイルの保存先

例 4/16 15:29 に測定を開始した場合，保存先は，以下のようになります。

< D:¥Anritsu Corporation¥Signal Analyzer¥User Data¥Waveform¥04161529_1>

“04161529_1”の末尾の数字は，“04161529_1”，“04161529_2”，“04161529_3”の順に自動的にインクリメントされます。15:30 になると“04161530_1”となります。

Waveform ファイル名

Folder.csv

Waveform ファイルフォーマット

例 Event Type が Sweep Complete 以外，Detection が RMS の場合

Filename,Date,999.500001 MHz,999.501819 MHz,…,1000.500001 MHz
LIM20140416163123000_R.spa, 4/16/2014 4:31:23 PM, -98.292000, -98.268000,…,-103.104000
LIM20140416163134000_R.spa,4/16/2014 4:31:34 PM,-102.664000,-102.688000,…,-106.108000
⋮
LIM20140416164324000_R.spa,4/16/2014 4:43:24 PM,-101.460000,-103.128000,…,-106.500000

例 Event Type が Sweep Complete 以外，Detection が Pos&Neg の場合

Filename, Date, 999.500001 MHz, 999.501819 MHz,…, 1000.500001 MHz
LIM20140416163123000_P.spa,4/16/2014 4:31:23 PM,-98.292000,-98.268000,…,-103.104000
LIM20140416163123000_N.spa,4/16/2014 4:31:23 PM,-98.294000,-98.269000,…,-103.105000
LIM20140416163134000_P.spa,4/16/2014 4:31:34 PM,-102.664000,-102.688000,…,-106.108000
LIM20140416163134000_N.spa,4/16/2014 4:31:34 PM,-102.666000,-102.689000,…,-106.109000
⋮
LIM20140416164324000_P.spa, 4/16/2014 4:43:24 PM, -101.460000, -103.128000,…,-106.500000
LIM20140416164324000_N.spa,4/16/2014 4:43:24 PM,-101.480000, -103.129000,…,-106.700000

例 Event Type が Sweep Complete，Detection が RMS の場合

Filename,Date,999.500001 MHz,999.501819 MHz,…,1000.500001 MHz
EOS20140416163123000_R.spa,4/16/2014 4:31:23 PM,-98.292000,-98.268000,…,-103.104000
EOS20140416163134000_R.spa,4/16/2014 4:31:34 PM,-102.664000,-102.688000,…,-106.108000
⋮
EOS20140416164324000_R.spa,4/16/2014 4:43:24 PM,-101.460000,-103.128000,…,-106.500000

_P：Positive 検波，_N：Negative 検波，_R：RMS 検波，_S：Sample 検波を示します。

3.4.3 Save on EventのWaveformファイルの削除

Spectrum Analyzer 画面を表示しているとき，Recall を押すと，表 3.2.7-1 の Recall ファンクションメニューが表示されます。Recall ファンクションメニューの F4 (Recall Waveform File) を押すと，表 3.4.3-1 の Recall Waveform File ファンクションメニューが表示されます。

Recall Waveform File ファンクションメニューでは，削除する Save on Event の Waveform ファイルを選択します。

表 3.4.3-1 Recall Waveform File ファンクションメニュー

ファンクションキー	メニュー表示	機能
F1	Device	ファイルの格納されているフォルダのデバイスを選択します。
F3	Delete Files	格納されている Save on Event の Waveform ファイルのリストを表示し，Delete Files ファンクションメニューを表示します。 ☞ 表 3.4.3-2 Delete Files ファンクションメニュー

Delete Files ファンクションメニューでは，選択した Save on Event の Waveform ファイルを削除します。

表 3.4.3-2 Delete Files ファンクションメニュー

ファンクションキー	メニュー表示	機能
F3	Select All	すべてのファイルを選択します。
F7	Delete	選択したファイルを削除します。
F8	Cancel	選択状態をキャンセルし，Recall Waveform File ファンクションメニューに戻ります。

第4章　マーカ機能

この章では，マーカ機能について説明します。

4.1　マーカの設定 4-2
4.1.1　ノーマルマーカの設定 4-5
4.1.2　デルタマーカの設定 4-5
4.1.3　ゾーンマーカの設定 4-6
4.1.4　マーカトレースの設定 4-7
4.1.5　アクティブマーカの設定 4-8
4.1.6　Fixed マーカの設定 4-8
4.1.7　結果表示の種類の設定 4-9
4.1.8　Freq.Count の設定 4-11
4.2　Peak サーチ機能の設定 4-13
4.2.1　Peak サーチの実行 4-17
4.2.2　Next Peak サーチの実行 4-17
4.2.3　サーチ分解能の設定 4-17
4.2.4　サーチしきい値の設定 4-18
4.2.5　Marker to Center Freq./Marker to Ref. Level の実行 4-18
4.2.6　Marker Search Function の実行 4-19
4.2.7　Power Peak サーチの実行 4-20
4.2.8　Next Power Peak サーチの実行 4-20
4.2.9　Min Search サーチの実行 4-21
4.2.10　Next Min サーチの実行 4-21
4.2.11　マーカトラッキング機能の設定 4-21
4.3　マーカリストの表示 4-22

4.1　マーカの設定

メインファンクションメニューで F5 (Marker)を押す，あるいは Marker を押すと，Marker ファンクションメニューが表示されます。

Marker メインファンクションメニューは 2 ページからなります。→ を押すことで，ページを変更することができます。

図 4.1-1　Marker キー

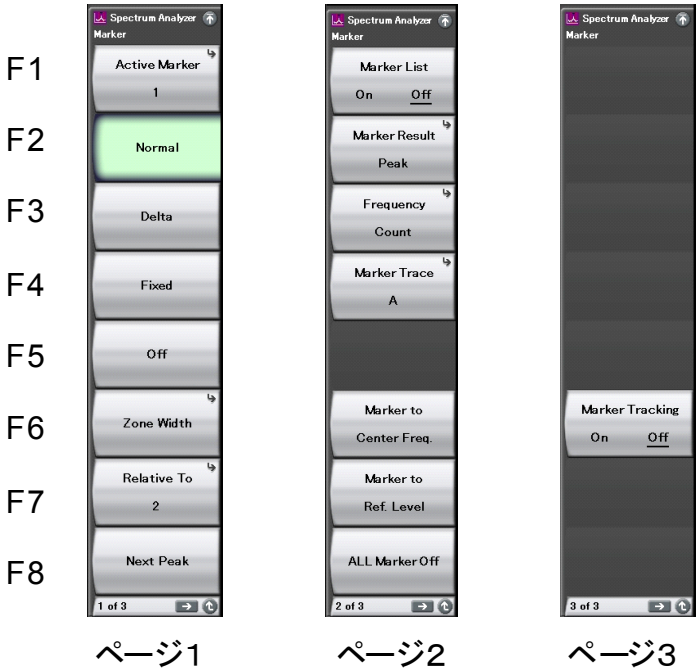

図 4.1-2　Marker ファンクションメニュー

表 4.1-1　Marker ファンクションメニューの説明

メニュー表示	機能
Active Marker	アクティブマーカを設定します。 ☞ 4.1.5 アクティブマーカの設定
Normal	マーカモードをノーマルに設定します。 ☞ 4.1.1 ノーマルマーカの設定
Delta	マーカモードをデルタに設定します。 ☞ 4.1.2 デルタマーカの設定
Fixed	マーカモードを Fixed に設定します。 ☞ 4.1.6 Fixed マーカの設定
Off	マーカの表示を Off にします。 ☞ 4.1.1 ノーマルマーカの設定
Zone Width	Zone Width ファンクションメニューを開きます。ゾーンマーカの周波数幅を設定します。 ☞ 4.1.3 ゾーンマーカの設定
Relative To	アクティブマーカが Delta のときの基準マーカを設定します。 ☞ 4.1.2 デルタマーカの設定
Next Peak	アクティブマーカの次に大きなピークを検索し，ゾーンマーカの中心周波数となるようにマーカを移動します。 ☞ 4.2.2 Next Peak サーチの実行
Marker List (On/Off)	マーカリスト表示の On/Off を設定します。 ☞ 4.3 マーカリストの表示
Marker Result	Marker Result ファンクションメニューを開きます。マーカ値の表示形式を設定します。 ☞ 4.1.7 結果表示の種類の設定
Marker Trace	マーカを表示するトレースを選択します。 ☞ 4.1.4 マーカトレースの設定
Marker to Center Freq.	現在のマーカ周波数をトレースの中心周波数に設定します。 ☞ 4.2.5 Marker to Center Freq. /Marker to Ref. Level の実行
Marker to Ref. Level	現在のマーカレベルをトレースのリファレンスレベルに設定します。 ☞ 4.2.5 Marker to Center Freq. /Marker to Ref. Level の実行
All Marker Off	すべてのマーカを Off にします。 ☞ 4.1.1 ノーマルマーカの設定
Marker Tracking	現在のマーカ周波数をトレースの中心周波数に設定してから掃引します。 ☞ 4.2.11 マーカトラッキング機能の設定

Zone Width ファンクションメニュー

Marker ファンクションメニューで F6 (Zone Width)を押すと，Zone Width ファンクションメニューが表示されます。

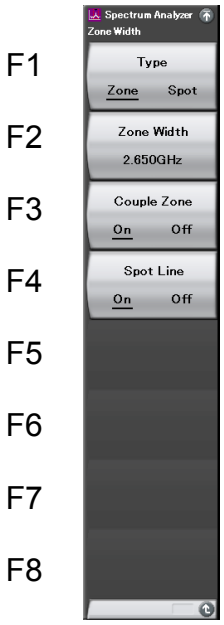

ページ 1

図 4.1-3　Zone Width ファンクションメニュー

表 4.1.2　Zone Width ファンクションメニュー

メニュー表示	機能
Type (Zone/Spot)	スポットマーカとゾーンマーカを切り替えます。 4.1.3 ゾーンマーカの設定
Zone Width	周波数ドメインのゾーンマーカ幅を設定します。 4.1.3 ゾーンマーカの設定
Couple Zone (On/Off)	Zone Width 設定共有の On/Off を設定します。On 時は Type と Zone Width の設定が，すべてのマーカで共有されます。Off 時はマーカごとに独立した値を設定できます。 4.1.3 ゾーンマーカの設定
Spot Line (On/Off)	スポットマーカの線表示の On/Off を設定します。 4.1.3 ゾーンマーカの設定

4.1.1　ノーマルマーカの設定

ノーマルマーカはトレース上に▼で表示され，画面上に周波数（時間）およびレベルを表示します。

＜手順＞

1. Marker を押します。
2. F2（Normal）を押すと，ノーマルマーカが表示されます。
3. F5（Off）を押すと，マーカの表示が消えます。

操作例：すべてのマーカを Off に設定する。

＜手順＞

1. Marker を押します。
2. ➔を押し Marker ファンクションメニューの 2 ページ目を表示させたあとに，F8（ALL Marker Off）を押すと，すべてのマーカが Off に設定されます。

4.1.2　デルタマーカの設定

マーカの周波数およびレベル表示が，基準点（Relative To で設定されたマーカ）との相対値となります。本機能を実行したときの Relative To で設定されたマーカが Off であれば Fixed マーカに設定され，トレース上に□で表示されます。以降，▼で表示されるマーカ（カレントマーカ）と□で表示される Fixed マーカの相対値が表示されるようになります。

＜手順＞

1. Marker を押します。
2. F3（Delta）を押して，デルタマーカに設定します。

操作例：マーカ 1 の Relative To をマーカ 3 に設定する。

＜手順＞

1. Marker を押します。
2. F1（Active Marker）を押したあと，F1（Marker1）を押して，アクティブマーカを 1 に設定します。
3. F7（Relative To）を押したあと，F3（Marker3）を押して，Relative To マーカを 3 に設定します。

4.1.3　ゾーンマーカの設定

図 4.1.3-1 の点線で囲まれた部分をゾーンマーカといいます。このゾーンマーカの内部にカレントマーカが存在し，ゾーンマーカで示される範囲内の最大レベル点に移動します。カレントマーカの示す周波数（または時間）およびレベルは画面上部に表示されます。

Marker を押すと，ロータリノブまたはステップキーによりゾーンマーカを移動できます。また，テンキーによりゾーンマーカの中心周波数をダイレクトに指定できます。

周波数ドメインモードでは，ゾーンマーカの幅を任意の値に設定できます。また，幅を持たないスポットマーカに設定することもできます。タイムドメインモードはスポットマーカのみ設定できます。

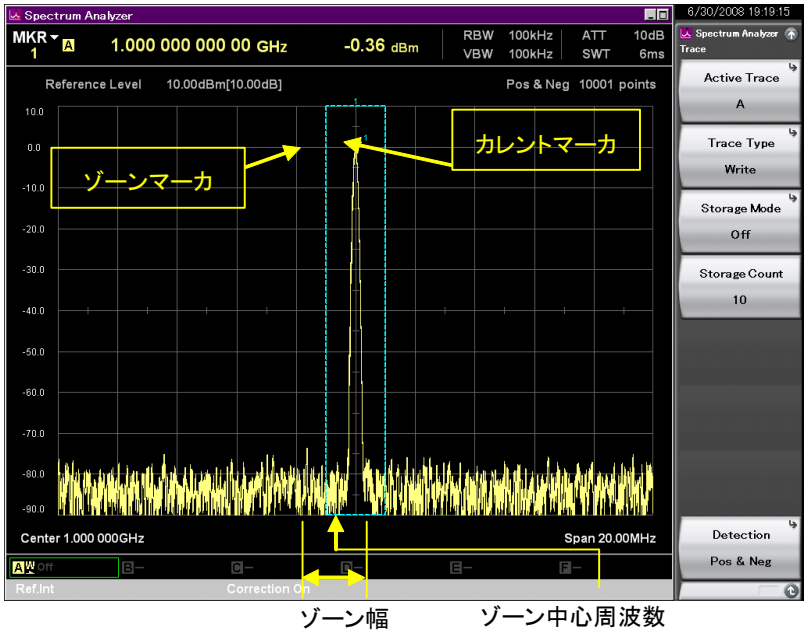

図 4.1.3-1　ゾーンマーカとカレントマーカ

操作例：ゾーンマーカの幅を 10 MHz に設定する

＜手順＞

1. Marker を押します。
2. F6 (Zone Width)を押し，Zone Width ファンクションメニューを開きます。
3. 1 0 を押したあと，F2 (MHz)を押して，ゾーンマーカの幅を設定します。

操作例：スポットマーカに設定する

＜手順＞

1. Marker を押します。
2. F6 (Zone Width)を押し，Zone Width ファンクションメニューを開きます。
3. F1 (Type)を押し，Spot を選択します。ゾーンマーカの中心周波数の位置にスポットマーカが設定されます。

注：

Marker Result (4.1.7 項参照)を Integration または Density に設定している場合，Zone 固定となり Spot の選択はできません。

操作例：スポットマーカの線表示を Off に設定する

＜手順＞

1. Marker を押します。
2. F6 (Zone Width)を押し，Zone Width ファンクションメニューを開きます。
3. F4 (Spot Line)を押し，Off を選択します。

操作例：Couple Zone を On に設定する

＜手順＞

1. Marker を押します。
2. F6 (Zone Width)を押し，Zone Width ファンクションメニューを開きます。
3. F3 (Couple Zone)を押し，On を選択します。マーカの幅を一括して設定することができます。

4.1.4　マーカトレースの設定

本アプリケーションは複数のトレースを同時に表示できます。マーカトレースを選択することで，マーカ表示の対象となるトレースを選択できます。

操作例：トレース C にマーカを設定する

＜手順＞

1. Marker を押します。
2. → を押し Marker ファンクションメニューの 2 ページ目を表示させたあとに，F4 (Marker Trace)を押して，“C”を選択します。

4.1.5　アクティブマーカの設定

アクティブマーカを選択します。アクティブマーカのマーカ位置はロータリノブやステップキーで設定できます。

操作例：アクティブマーカを 2 に設定する

＜手順＞

1. Marker を押します。
2. F1 (Active Marker)を押します。
3. F2 (Marker 2)を押し，アクティブマーカを 2 に設定します。

4.1.6　Fixedマーカの設定

Fixed マーカは画面上に□で表示されます。画面上に固定され，固定値を持ちます。

操作例：マーカ 3 を Fixed マーカに設定する

＜手順＞

1. Marker を押します。
2. F1 (Active Marker)を押したあと，F3 を押し，アクティブマーカを 3 に設定します。
3. F4 (Fixed)を押し，Fixed マーカに設定します。

4.1.7　結果表示の種類の設定

マーカ結果の種類を選択する方法として，Marker Result 機能があります。

Marker Result ファンクションメニュー

Marker ファンクションメニューのページ 2 で F2 (Marker Result)を押すと，Marker Result ファンクションメニューが表示されます。

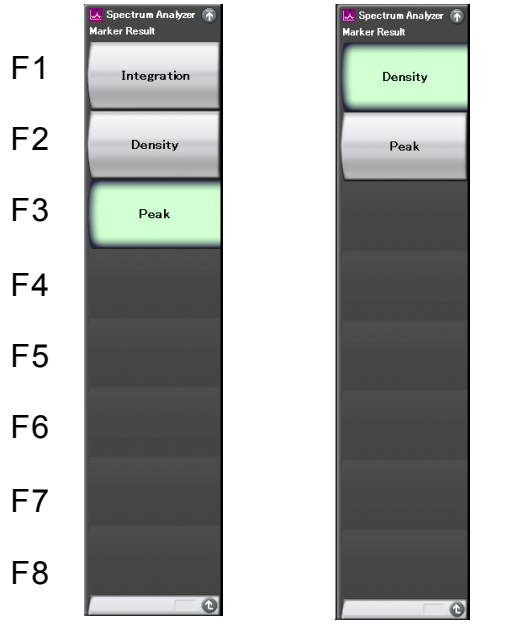

周波数ドメイン時　　タイムドメイン時

図 4.1.7-1　Marker Result ファンクションメニュー

表 4.1.7-1　Marker Result ファンクションメニュー

メニュー表示	機能
Integration	ゾーン帯域内の合計パワーを表示します。 パワー／マーカの帯域幅で表示されます。
Density	ゾーン帯域内の 1 Hz 当たりのパワーを表示します。 パワー／Hz で表示されます。
Peak	ゾーン内のピークパワーを表示します。 カレントマーカで表示され，ピークパワーを表示します。

ゾーンマーカで示される周波数範囲におけるパワー（総電力，電力密度，ピークパワー）を選択します。

操作例：ゾーン帯域内の 1 Hz 当たりのパワーを表示させる

＜手順＞

1. Marker を押します。
2. → を押して Marker ファンクションメニューのページ 2 を表示させたあとに，F2（Marker Result）を押します。
3. F2（Density）を押して，Density に設定します。

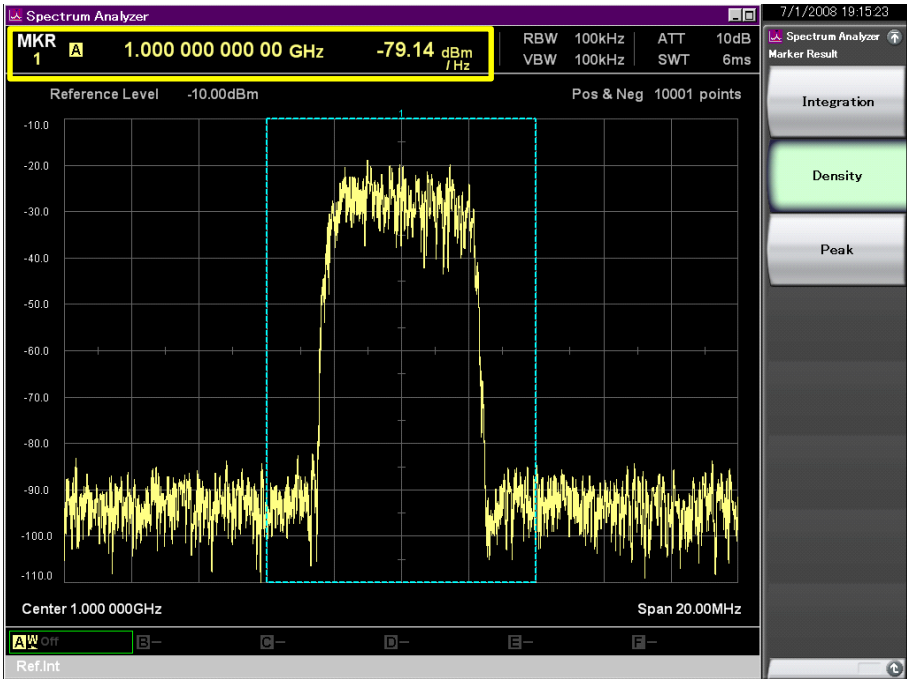

図 4.1.7-2　電力密度を表示

4.1.8　Freq.Countの設定

周波数カウンタの測定機能設定方法として，Freq.Count 機能があります。

Freq.Count ファンクションメニュー

Marker ファンクションメニューのページ 2 で F3 (Freq.Count)を押すと，Freq.Count ファンクションメニューが表示されます。

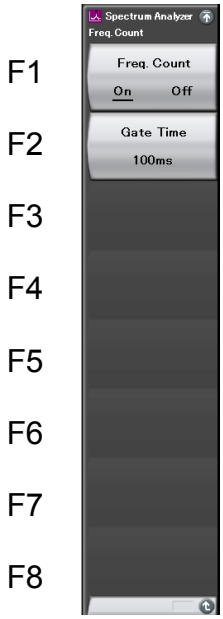

図 4.1.8-1　Freq.Count ファンクションメニュー

表 4.1.8-1　Freq.Count ファンクションメニューの説明

ファンクションキー	メニュー表示	機能
F1	Freq. Count (On Off)	周波数カウンタの測定機能の有効/無効を設定します。
F2	Gate Time	周波数カウンタ測定を行う時間を設定します。

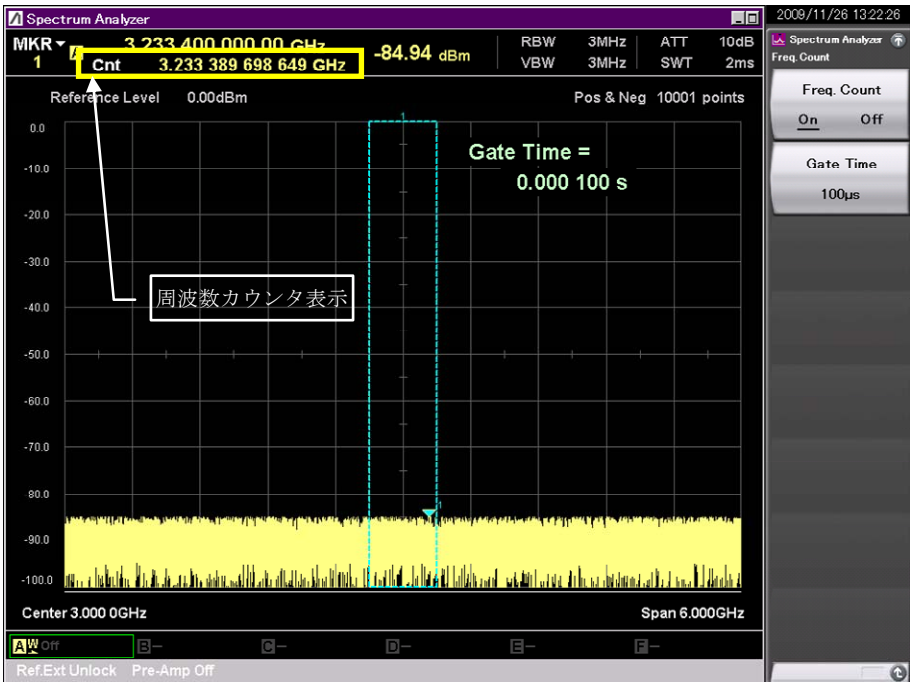

図 4.1.8-2　周波数カウンタの表示

4.2　Peak サーチ機能の設定

Peak サーチ機能には，Peak，Next Peak，Min，および Next Min サーチの 4 種類があります。

Peak Search ファンクションメニュー

メインファンクションメニューのページ 2 で F1 (Peak Search)を押す，あるいは Peak Search を押すと，Peak Search ファンクションメニューが表示されます。

図 4.2-1　Peak Search キー

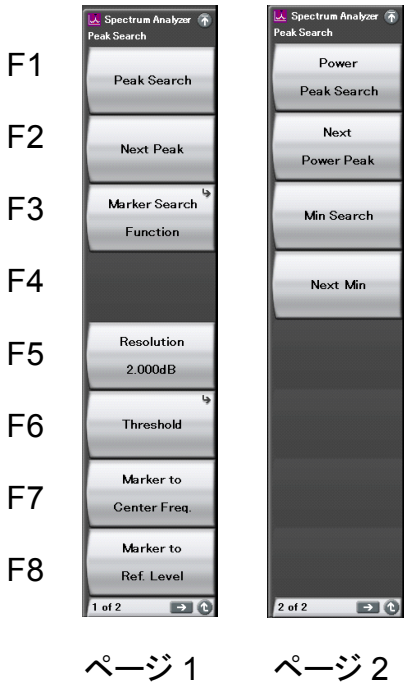

図 4.2-2　Peak Search ファンクションメニュー

表 4.2-1　Peak Search ファンクションメニューの説明

メニュー表示	機能
Peak Search	測定帯域内における最大レベル点がゾーンマーカの中心周波数となるようにマーカを移動します。 ☞ 4.2.1 Peak サーチの実行
Next Peak	アクティブマーカの次に大きなピークを探索し，ゾーンマーカの中心周波数となるようにマーカを移動します。 ☞ 4.2.2 Next Peak サーチの実行
Marker Search Function	Marker Search ファンクションメニューを開きます。マーカを周波数順またはレベル順に配置することができます。 ☞ 4.2.6 Marker Search Function の実行
Resolution	Next Peak および Next Min サーチの分解能を設定します。 ☞ 4.2.3 サーチ分解能の設定
Threshold	サーチ対象とするレベル点に制限をかけるためのしきい値を設定します。 ☞ 4.2.4 サーチしきい値の設定
Marker to Center Freq.	アクティブマーカの周波数を中心周波数に設定します。 ☞ 4.2.5 Marker to Center Freq. /Marker to Ref. Level の実行
Marker to Ref. Level	アクティブマーカのレベルをリファレンスレベルに設定します。 ☞ 4.2.5 Marker to Center Freq. /Marker to Ref. Level の実行
Power Peak Search	測定帯域内においてアクティブマーカのゾーン幅の積分パワーが最大になる位置にアクティブマーカを移動します。 ☞ 4.2.7 Power Peak サーチの実行
Next Power Peak	測定帯域内においてアクティブマーカのゾーン幅の積分パワーに対し，次に大きなゾーン幅の積分パワーを検出しアクティブマーカを移動します。 ☞ 4.2.8 Next Power Peak サーチの実行
Min Search	測定帯域内における最小レベル点がゾーンマーカの中心周波数となるようにマーカを移動します。 ☞ 4.2.9 Min Search サーチの実行
Next Min	アクティブマーカの次に小さなディップを探索し，ゾーンマーカの中心周波数となるようにマーカを移動します。 ☞ 4.2.10 Next Min サーチの実行

Threshold ファンクションメニュー

Peak Search ファンクションメニューで F6 (Threshold) を押すと，Threshold ファンクションメニューが表示されます。または Marker Search Function メニューで F8 (Threshold) を押すことにより Threshold ファンクションメニューを表示できます。

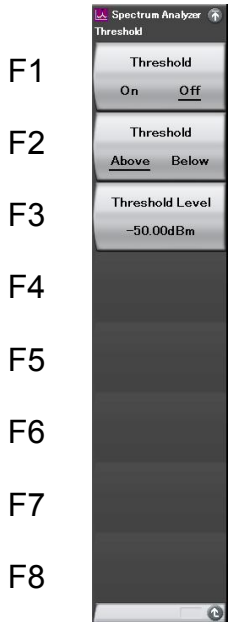

図 4.2-3　Threshold ファンクションメニュー

表 4.2-2　Threshold ファンクションメニューの説明

メニュー表示	機能
Threshold (On/Off)	Peak，Next Peak，Min，および Next Min サーチの検出しきい値機能の On/Off を選択します。 4.2.4　サーチしきい値の設定
Threshold (Above/Below)	Peak，Next Peak，Min，および Next Min サーチの Above（上側検出）/Below（下側検出）を選択します。 4.2.4　サーチしきい値の設定
Threshold Level	Peak，Next Peak，Min，および Next Min サーチのしきい値を設定します。 4.2.4　サーチしきい値の設定

Marker Search Function ファンクションメニュー

Peak Search ファンクションメニューで F3 (Marker Search Function)を押すと，Marker Search ファンクションメニューが表示されます。

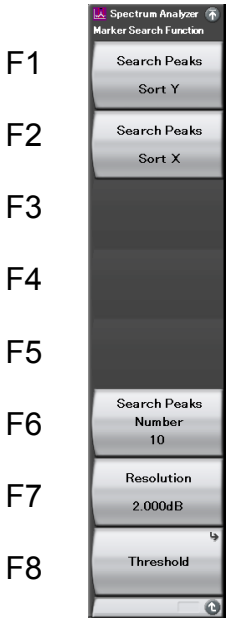

図 4.2-4　Marker Search ファンクションメニュー

表 4.2-3　Marker Search ファンクションメニューの説明

メニュー表示	機能
Search Peaks Sort Y	トレース上の上位 N 個（Search Peaks Number）のピーク点に対して，レベル順でマーカを配置します。 4.2.6　Marker Search Function の実行
Search Peaks Sort X	トレース上の上位 N 個（Search Peaks Number）のピーク点に対して，周波数順（時間順）でマーカを配置します。 4.2.6　Marker Search Function の実行
Search Peaks Number	Search Peaks Sort Y/X を実行したときの検索数を設定します。 4.2.6　Marker Search Function の実行
Resolution	サーチの分解能を設定します。 4.2.3　サーチ分解能の設定
Threshold Level	サーチのしきい値を設定します。 4.2.4　サーチしきい値の設定

4.2.1 Peakサーチの実行

表示中のトレースから最大レベル点を検出し，マーカを移動します。

最大レベル点が複数存在する場合には，最も周波数（または時間）の小さい点（＝スケールの左側）に移動します。

Peak サーチの実行手順は以下のとおりです。

＜手順＞

1. [Peak Search] を押します。
2. [F1]（Peak Search）を押すと，Peak サーチを実行します。

4.2.2 Next Peakサーチの実行

アクティブマーカの次にレベルが大きい極大点を検出し，マーカを移動します。

最大レベル点が複数存在する場合には，最も周波数（または時間）の小さい点（＝スケールの左側）に移動します。

Next Peak サーチの実行手順は以下のとおりです。

＜手順＞

1. [Peak Search] を押します。
2. [F2]（Next Peak）を押すと，Next Peak サーチを実行します。

4.2.3 サーチ分解能の設定

ピークの分解能を設定します。Next Peak，Next Power Peak，および Next Min サーチの実行時に適用されます。指定された分解能以下のピークは検出されません。

操作例：サーチ分解能の値を 30 dB に設定する

＜手順＞

1. [Peak Search] を押します。
2. [F5]（Resolution）を押します。
3. [3] [0] を押したあと，[F1]（dB）を押して，サーチ分解能を設定します。

4.2.4　サーチしきい値の設定

Peak を検出するレベルのしきい値を指定します。設定したしきい値は，Min サーチ実行時にも適用されます。しきい値は画面上に表示され，それより上側または下側を検索の対象に指定できます。

操作例：サーチしきい値を－30 dBm 以上に設定する

＜手順＞

1. [Peak Search] を押します。
2. [F6]（Threshold）を押します。
3. [F1]（Threshold）を押して，On に切り替えます。
4. [F3]（Threshold Level）を押して，[−/+] [3] [0] を押し，[F1]（dBm）を押します。
5. [F2]（Threshold）を押して，Above を選択します。

4.2.5　Marker to Center Freq./Marker to Ref. Levelの実行

トレースの中心周波数やリファレンスレベルを，アクティブマーカの周波数やレベルに合わせることができます。

- Marker to Center Freq.　　マーカ周波数を中心周波数に設定します。（周波数スパン ＞ 0 の場合のみ有効）
- Marker to Ref. Level　　マーカレベルをリファレンスレベルに設定します。

操作例：マーカ周波数を中心周波数に設定する

＜手順＞

1. [Marker] を押します。
2. Marker ファンクションメニューのページ 2 で [F6]（Marker to Center Freq.）を押して，設定します。

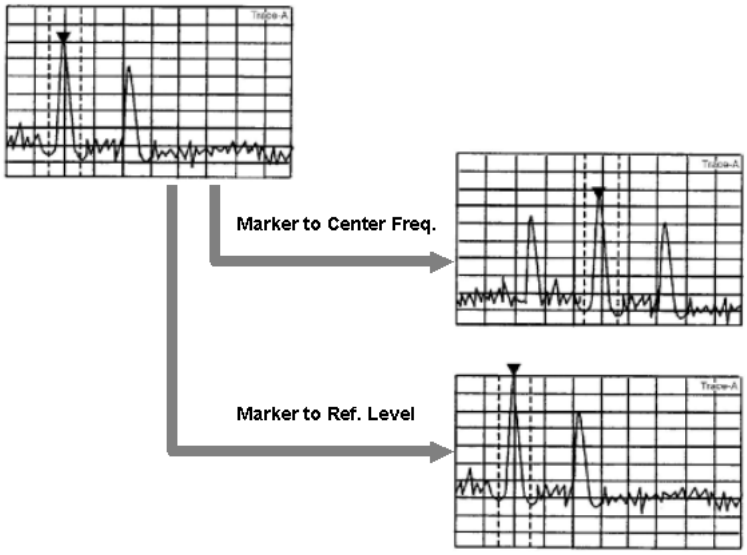

図 4.2.5-1　Marker to Center Freq.または Marker to Ref. Level の実行

4.2.6　Marker Search Functionの実行

Search Peaks Number で設定した数のマーカを周波数(時間)順またはレベル順に配置します。

注:

Marker Search Function は, Marker Result を Peak に設定している場合に実行できます。

☞ 4.1.7 結果表示の種類の設定

操作例: 3 個のマーカをレベル順に配置する

＜手順＞

1. [Peak Search] を押します。
2. [F3] (Marker Search Function) を押したあと, [F6] (Search Peaks Number) に [3] を入力します。
3. [F1] (Search Peaks Sort Y) を押すとマーカがレベル順に配置されます。

操作例: マーカを周波数順に配置する

＜手順＞

1. [Peak Search] を押します。
2. [F3] (Marker Search Function) を押します。
3. [F2] (Search Peaks Sort X) を押すとマーカが周波数順に配置されます。

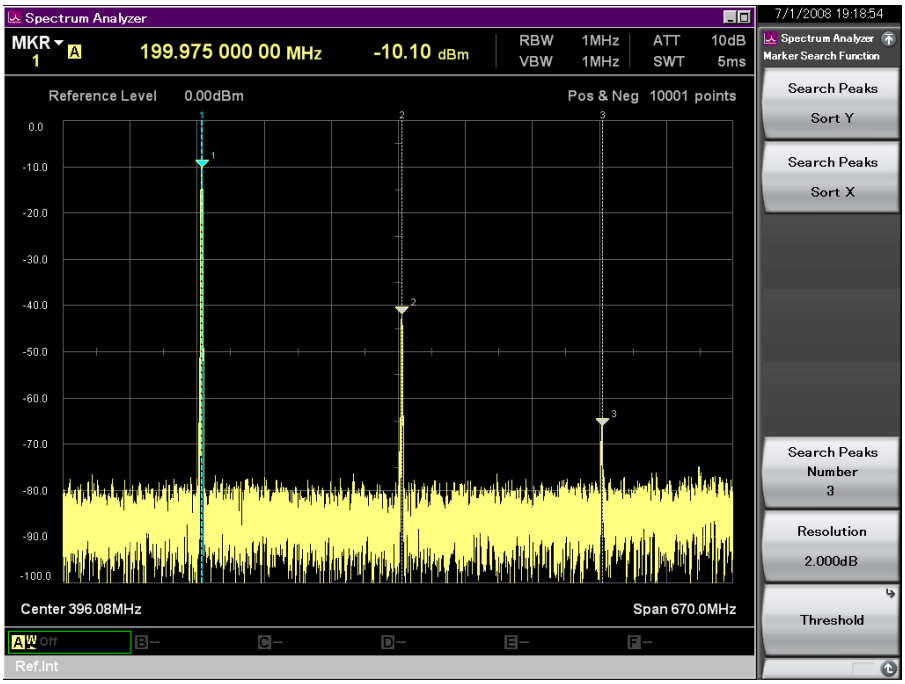

図 4.2.6-1　マーカをレベル順に配置

4.2.7　Power Peakサーチの実行

測定帯域内においてアクティブマーカのゾーン幅の積分パワーが最大になる位置にアクティブマーカを移動します。

最大レベル点が複数存在する場合には，最も周波数の低い点（＝スケールの左側）に移動します。

本機能はタイムドメイン時は実行できません。

注：

Marker Result が Peak のときに本機能を実行すると，自動的に Marker Result が Integration に変更されます。

4.1.7　結果表示の種類の設定

Power Peak サーチの実行手順は以下のとおりです。

＜手順＞

1. Peak Search を押します。
2. ➔を押し Peak Search ファンクションメニューの 2 ページ目を表示させます。
3. F1（Power Peak Search）を押すと，Power Peak サーチを実行します。

4.2.8　Next Power Peakサーチの実行

測定帯域内においてアクティブマーカのゾーン幅の積分パワーに対し，次に大きなゾーン幅の積分パワーを検出しアクティブマーカを移動します。

最大レベル点が複数存在する場合には，最も周波数の低い点（＝スケールの左側）に移動します。

本機能はタイムドメイン時は実行できません。

注：

Marker Result が Peak のときに本機能を実行すると，自動的に Marker Result が Integration に変更されます。

4.1.7　結果表示の種類の設定

Next Power Peak サーチの実行手順は以下のとおりです。

＜手順＞

1. Peak Search を押します。
2. ➔を押し Peak Search ファンクションメニューの 2 ページ目を表示させます。
3. F2（Next Power Peak）を押すと，Next Power Peak サーチを実行します。

4.2.9 Min Searchサーチの実行

測定帯域内における最小レベル点がゾーンマーカの中心周波数となるようにマーカを移動します。

Min Search サーチの実行手順は以下のとおりです。

＜手順＞

1. [Peak Search] を押します。
2. [→]を押し Peak Search ファンクションメニューの 2 ページ目を表示させます。
3. [F3](Min Search)を押すと，Min Search サーチを実行します。

4.2.10 Next Minサーチの実行

アクティブマーカの次に小さなディップを探索し，ゾーンマーカの中心周波数となるようにマーカを移動します。

Next Min サーチの実行手順は以下のとおりです。

＜手順＞

1. [Peak Search] を押します。
2. [→]を押し Peak Search ファンクションメニューの 2 ページ目を表示させます。
3. [F4](Next Min)を押すと，Next Min サーチを実行します。

4.2.11 マーカトラッキング機能の設定

トレースの中心周波数を，アクティブマーカの周波数に合わせてから掃引を実行することができます。

操作例：マーカトラッキング機能を On に設定する

＜手順＞

1. [Marker] を押します。
2. Marker ファンクションメニューのページ 3 で [F6](Marker Tracking)を押して，設定します。

4.3　マーカリストの表示

マーカの結果をリストで表示します。リストにはマーカの周波数，パワーが表示されます。

操作例：マーカ表示を On に設定する

＜手順＞

1. Marker を押します。

2. → を押して Marker ファンクションメニューのページ 2 を表示させたあとに，F1 (Marker List) を On に設定します。

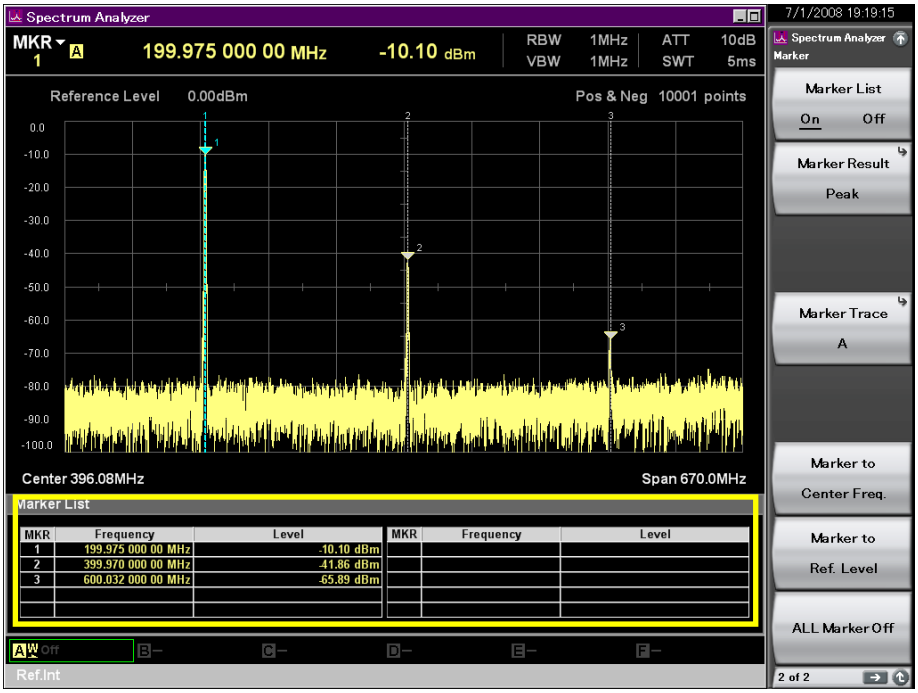

図 4.3-1　マーカリストの表示

表 4.3-1　マーカリスト表示項目の説明

項目	内容
MKR	マーカ番号を表示します。 番号表示時はマーカ番号を表します。 ⊿表示時はアクティブマーカと Relative To で設定されたマーカとのレベルまたは周波数の差分を表示します。□表示時は Fixed マーカであることを示します。
Frequency	マーカの周波数を表示します。
Level	マーカのレベルを表示します。結果は Marker Result で選択された結果が Scale Unit で指定された単位で表示されます。MKR が⊿表示時はアクティブマーカと Relative To で設定されたマーカとの相対値で表示されます。

第5章　トリガ機能・ゲート機能

この章では，トリガ機能およびゲート機能について説明します。

5.1　トリガ機能の設定 5-2
5.1.1　トリガ掃引 5-4
5.2　ゲート機能の設定 5-7
5.2.1　ゲート掃引 5-7
5.2.2　ゲートビュー 5-11

5.1　トリガ機能の設定

メインファンクションメニューで F7 (Trigger/Gate)を押す，あるいは Trigger/Gate を押すと，Trigger ファンクションメニューが表示されます。

Trigger ファンクションメニューは 2 ページからなります。→ を押すことで，ページを変更することができます。

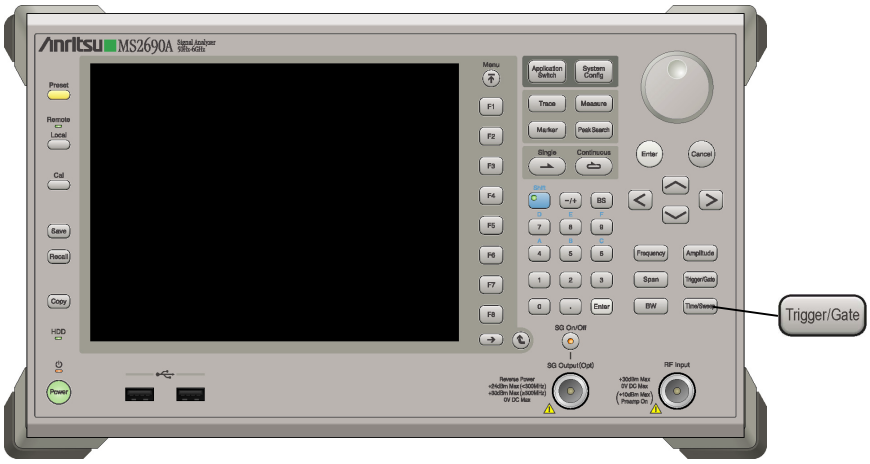

図 5.1-1　Trigger/Gate キー

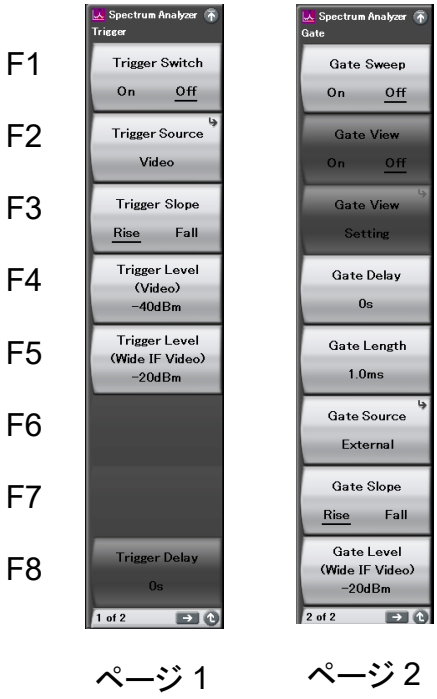

図 5.1-2　Trigger ファンクションメニュー

表 5.1-1　Trigger ファンクションメニューの説明

メニュー表示	機能
Trigger Switch (On/Off)	トリガ機能を有効にします。 ☞ 5.1.1 トリガ掃引
Trigger Source	トリガソースを選択します。 ☞ 5.1.1 トリガ掃引
Trigger Slope (Rise/Fall)	トリガ検出方法(立ち上がりまたは立ち下がり)を選択します。 ☞ 5.1.1 トリガ掃引
Trigger Level (Video)	ビデオトリガのトリガレベルを設定します。 ☞ 5.1.1 トリガ掃引
Trigger Level (Wide IF Video)	ワイド IF ビデオトリガのトリガレベルを設定します。 ☞ 5.1.1 トリガ掃引
Trigger Delay	トリガ遅延時間を設定します。 ☞ 5.1.1 トリガ掃引
Gate Sweep (On/Off)	ゲート機能を有効にします。 ☞ 5.2.1 ゲート掃引
Gate View (On/Off)	ゲートビューを表示します。 ☞ 5.2.2 ゲートビュー
Gate View Setting	ゲートビューに関する設定を行います。 ☞ 5.2.2 ゲートビュー
Gate Delay	ゲートディレイを設定します。 ☞ 5.2.1 ゲート掃引
Gate Length	ゲートレングスを設定します。 ☞ 5.2.1 ゲート掃引
Gate Source	ゲートソースを選択します。 ☞ 5.2.1 ゲート掃引
Gate Slope (Rise/Fall)	ゲート検出方法(立ち上がりまたは立ち下がり)を選択します。 ☞ 5.2.1 ゲート掃引
Gate Level (Wide IF Video)	ゲート掃引時のワイド IF ビデオトリガのトリガレベルを設定します。 ☞ 5.2.1 ゲート掃引

5.1.1　トリガ掃引

トリガ掃引は，指定したトリガ条件を開始点として掃引します。トリガディレイにより，掃引開始までの遅延時間を設定できます。トリガディレイはタイムドメインのみ設定できます。

トリガソースは，以下から選択できます。

- ビデオトリガ
- ワイド IF ビデオトリガ
- 外部トリガ
- SG マーカトリガ
- BBIF トリガ

トリガレベル（ビデオ）の設定範囲，最小設定分解能

トリガレベル設定範囲	–150～＋50 dBm	（Log スケール）
	0～100%	（Lin スケール）
トリガレベル最小設定分解能	1 dBm	（Log スケール）
	1%	（Lin スケール）

（1）　ビデオトリガ

波形の立ち上がりまたは立ち下がりに同期してトリガ掃引を開始します。画面上にトリガレベルを示すトリガレベルインジケータが表示されます。

操作例：トリガレベルを＋40 dBm で立ち上がりに設定する

＜手順＞

1. [Trigger/Gate] を押します。
2. [F2]（Trigger Source）を押して，[F1]（Video）を選択します。
3. [↺] を押すと，元のメニューに戻ります。
4. [F4]（Trigger Level（Video））を押します。
5. [4] [0] を押したあと，[F1]（dBm）を押して，トリガレベルを設定します。
6. [F3]（Trigger Slope）を押して，Rise（立ち上がり）を選択します。

(2)　ワイド IF ビデオトリガ

約 50 MHz の広い通過帯域の IF 信号を検波し，その信号を立ち上がりまたは立ち下がりに同期して掃引を開始します。

トリガレベル（ワイド IF ビデオトリガ）の設定範囲，最小設定分解能

トリガレベル設定範囲	–60～＋50 dBm
トリガレベルの最小設定分解能	1 dBm

操作例：トリガレベルを–30 dBm で立ち下がりに設定する

＜手順＞

1. [Trigger/Gate] を押します。
2. [F2]（Trigger Source）を押して，[F2]（Wide IF Video）を選択します。
3. [↺] を押すと，元のメニューに戻ります。
4. [F5]（Trigger Level（Wide IF Video））を押します。
5. [–/+] [3] [0] を押したあと，[F1]（dBm）を押してトリガレベルを設定します。
6. [F3]（Trigger Slope）を押して，Fall（立ち下がり）を選択します。

(3)　外部トリガ

Trigger Input コネクタから入力された信号の立ち上がりまたは立ち下がりに同期して掃引を開始します。

操作例：外部トリガで立ち上がりに設定する

＜手順＞

1. [Trigger/Gate] を押します。
2. [F2]（Trigger Source）を押して，[F3]（External）を選択します。
3. [↺] を押すと，元のメニューに戻ります。
4. [F3]（Trigger Slope）を押して，Rise を選択します。

(4)　SG マーカトリガ

注:

本機能はオプション 020 ベクトル信号発生器(以下, オプション 020)実装時のみ設定できます。

オプション 020 のマーカ信号出力の立ち上がりまたは立ち下がりに同期して掃引を開始します。本機能により出力信号に同期して測定することができます。マーカ信号の設定については,「MS2690A/MS2691A/MS2692A オプション 020 ベクトル信号発生器 取扱説明書(操作編)」を参照してください。

＜手順＞

1. Trigger/Gate を押します。
2. F2 (Trigger Source)を押して, F4 (SG Marker)を選択します。
3. を押すと, 元のメニューに戻ります。
4. F3 (Trigger Slope)を押して, Rise または Fall を選択します。

(5)　BBIF トリガ

注:

本機能はオプション 040 ベースバンドインタフェースユニット(以下, オプション 040)非搭載時, またはソフトウェアパッケージ Ver.6.00.00 以降の場合は設定できません。

オプション 040 のトリガ出力信号の立ち上がりまたは立ち下がりに同期して掃引を開始します。BBIF トリガ信号の設定については,「MX269041A DigRF2.5G/3G 用 Digital I/F 制御ソフトウェア 取扱説明書(BBIF 操作編)」を参照してください。

＜手順＞

1. Trigger/Gate を押します。
2. F2 (Trigger Source)を押して, F5 (BBIF)を選択します。
3. を押すと, 元のメニューに戻ります。
4. F3 (Trigger Slope)を押して, Rise または Fall を選択します。

5.2　ゲート機能の設定

5.2.1　ゲート掃引

ゲート掃引は，指定したトリガ条件が満たされた時刻にゲートディレイで設定された遅延時間を加算した時刻を開始点として，ゲートレングスで指定された時間だけ掃引します。

ゲートソースは，以下から選択できます。

- ワイド IF ビデオトリガ
- 外部トリガ
- SG マーカトリガ
- BBIF トリガ

ゲートディレイの設定範囲，最小設定分解能

設定範囲	0～1 s
最小設定分解能	20 ns

ゲートレングスの設定範囲，最小設定分解能

設定範囲	10 μs～1 s
最小設定分解能	20 ns

（1）　ワイド IF ビデオトリガ

約 50 MHz の広い通過帯域の IF 信号を検波し，その信号を立ち上がりまたは立ち下がりに同期して掃引を開始させます。

操作例：ゲートディレイを 100 ns，ゲートレングスを 500 μs，ゲートレベルを–30 dBm に設定する

＜手順＞

1. [Trigger/Gate] を押します。
2. Trigger ファンクションメニューのページ 2 で [F1]（Gate Sweep）を押して，On を選択します。
3. [F6]（Gate Source）を押して，[F1]（Wide IF Video）を選択します。
4. [↺] を押すと，元のメニューに戻ります。
5. [F4]（Gate Delay）を押し，[1] [0] [0] を押したあと，[F4]（ns）を押します。
6. [F5]（Gate Length）を押し，[5] [0] [0] を押したあと，[F3]（μs）を押します。
7. [F8]（Gate Level（Wide IF Video））を押し，[–/+] [3] [0] を押したあと，[F1]（dBm）を押します。

ゲートレベル（ワイド IF ビデオトリガ）の設定範囲，最小設定分解能

ゲートレベル設定範囲	–60～＋50 dBm
ゲートレベル最小設定分解能	1 dBm

(2)　外部トリガ

External Input コネクタに入力された信号の立ち上がりまたは立ち下がりを開始点として，ゲートレングスの時間だけ掃引します。

操作例：ゲートディレイを 100 μs，ゲートレングスを 300 μs で立ち下がりに設定する

＜手順＞

1. [Trigger/Gate] を押します。
2. Trigger ファンクションメニューのページ 2 で [F6](Gate Source)を押したあと，[F2](External)を押します。
3. [↺] を押すと，元のメニューに戻ります。
4. [F4](Gate Delay)を押し，[1] [0] [0] を押したあと，[F3](μs)を押してゲートディレイを設定します。
5. [F5](Gate Length)を押し，[3] [0] [0] を押したあと，[F3](μs)を押してゲートレングスを設定します。
6. [F7](Gate Slope)を押して，Fall を選択します。

(3)　SG マーカトリガ

注：

本機能はオプション 020 実装時のみ設定できます。

オプション 020 のマーカ信号出力の立ち上がりまたは立ち下がりに同期してゲート掃引を開始します。本機能により出力信号に同期して測定することができます。マーカ信号の設定については，「MS2690A/MS2691A/MS2692A オプション 020 ベクトル信号発生器 取扱説明書(操作編)」を参照してください。

操作例：ゲートディレイを 200 μs，ゲートレングスを 100 ms で立ち上がりに設定する

＜手順＞

1. [Trigger/Gate] を押します。
2. Trigger ファンクションメニューのページ 2 で [F6](Gate Source)を押したあと，[F3](SG Marker)を選択します。
3. [↺] を押すと，元のメニューに戻ります。
4. [F4](Gate Delay)を押し，[2] [0] [0] を押したあと，[F3](μs)を押してゲートディレイを設定します。
5. [F5](Gate Length)を押し，[1] [0] [0] を押したあと，[F2](ms)を押してゲートレングスを設定します。
6. [F7](Gate Slope)を押して，Rise を選択します。

(4)　BBIF トリガ

注:

本機能はオプション 040 非搭載時，またはソフトウェアパッケージ Ver.6.00.00 以降の場合は設定できません。

BBIFトリガを使うと，オプション 040 のトリガ出力信号の立ち上がりまたは立ち下がりに同期してゲート掃引を開始します。BBIF トリガ信号の設定については，「MX269041A DigRF2.5G/3G 用 Digital I/F 制御ソフトウェア 取扱説明書（BBIF 操作編）」を参照してください。

操作例: ゲートディレイを 100 μs，ゲートレングスを 100 ms ゲートスロープを立ち上がりに設定する

＜手順＞

1. [Trigger/Gate] を押します。
2. Trigger ファンクションメニューのページ 2 で [F6]（Gate Source）を押したあと，[F4]（BBIF）を選択します。
3. [↑] を押すと，元のメニューに戻ります。
4. [F4]（Gate Delay）を押し，[1] [0] [0] を押したあと，[F3]（μs）を押してゲートディレイを設定します。
5. [F5]（Gate Length）を押し，[1] [0] [0] を押したあと，[F2]（ms）を押してゲートレングスを設定します。
6. [F7]（Gate Slope）を押して，Rise を選択します。

5.2.2　ゲートビュー

ここではゲートビューの説明をします。Gate View を On にすると画面下部にゲート掃引区間を設定するための補助画面（ゲートビュー）が表示されます。ゲートビューを表示することでスペクトラムを確認しながら，ゲート掃引区間を設定することができます。

図 5.2.2-1　ゲートビュー

表 5.2.2-1　ゲートビュー表示項目の説明

番号	表示	内容
①	RBW	分解能帯域幅（RBW）が表示されます。
②	VBW	ビデオ帯域幅（VBW）が表示されます。
③	検波モード	検波モードが表示されます。
④	トレースポイント数	トレースポイント数が表示されます。
⑤	時間ドメイン波形	時間ドメイン波形が表示されます。
⑥	ゲート掃引区間	ゲート掃引区間がオレンジ色の破線で表示されます。
⑦	トリガディレイ	トリガディレイが表示されます。
⑧	時間スパン	時間スパン（掃引時間）が表示されます。
⑨	中心周波数	中心周波数が表示されます。

Trigger ファンクションメニューの 2 ページ目で F3 (Gate View Setting)を押すと，Gate View Setting ファンクションメニューが表示されます。

Gate View Setting ファンクションメニューは 2 ページからなります。→ を押すことで，ページを変更することができます。

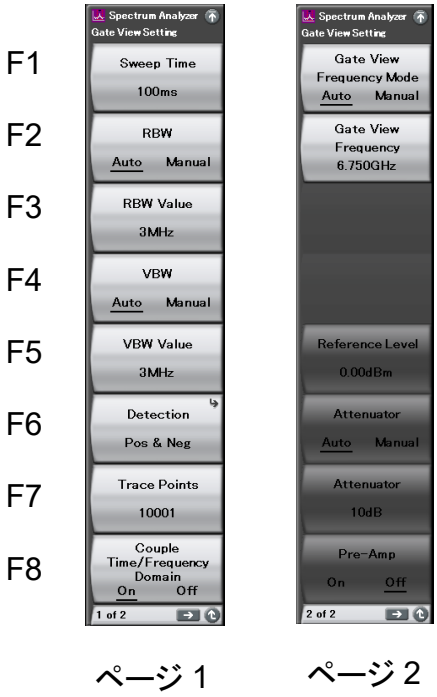

図 5.2.2-2　Gate View Setting ファンクションメニュー

表 5.2.2-2　Gate View Setting ファンクションメニューの説明

メニュー表示	機能
Sweep Time	掃引時間を設定します。 設定される時間はゲートビューの表示時間範囲であって，ゲート掃引が行われる区間ではありません。ゲート掃引が行われる区間は「5.2.1 ゲート掃引」を参照してください。
RBW(Auto/Manual)	分解能帯域幅(RBW)の自動設定/手動設定を選択します。 Auto 時は分解能帯域幅(RBW)が 3 MHz に設定されます。 Manual 時は RBW Value の設定値が分解能帯域幅(RBW)となります。
RBW Value	分解能帯域幅(RBW)を設定します。 以下から選択できます。 30 Hz, 100 Hz, 300 Hz, 1 kHz, 3 kHz, 10 kHz, 30 kHz, 100 kHz, 300 kHz, 1 MHz, 3 MHz, 5 MHz, 10 MHz, 20 MHz, 31.25 MHz

表 5.2.2-2　Gate View Setting ファンクションメニューの説明（続き）

メニュー表示	機能
VBW (Auto/Manual)	ビデオ帯域幅（VBW）の自動設定/手動設定を選択します。 Detection が RMS のとき，変更できません。 Auto 時は分解能帯域幅（RBW）と同じ，または最も近い値に設定されます。 Manual 時は VBW Value の設定値がビデオ帯域幅（VBW）となります。
VBW Value	ビデオ帯域幅（VBW）を設定します。 VBW Mode は BW ファンクションメニューで設定します。 ☞ 2.5.3 Video VBW/Power VBW の設定
Detection	検波モードを設定します。
Trace Point	トレースポイント数を設定します。
Couple Time/Frequency Domain	時間／周波数ドメインパラメータの共有／独立を設定します。 ☞ 2.3.7 時間／周波数ドメインパラメータの共有／独立の設定
Gate View Frequency Mode (Auto/Manual)	中心周波数の自動設定/手動設定を選択します。 Auto 時は周波数ドメインと同じ中心周波数が設定されます。 Manual 時は Gate View Frequency の設定値が中心周波数となります。
Gate View Frequency	中心周波数を設定します。
Reference Level	Spurious Emission が On のときのリファレンスレベルを設定します。 Spurious Emission が Off のときは周波数ドメインと同じリファレンスレベルが設定され，本機能は設定できません。
Attenuator (Auto/Manual)	Spurious Emission が On のときのアッテネータの自動設定/手動設定を選択します。 Spurious Emission が Off のときは周波数ドメインと同じアッテネータの自動設定/手動設定が選択され，本機能は選択できません。
Attenuator	Spurious Emission が On のときのアッテネータを設定します。 Spurious Emission が Off のときは周波数ドメインと同じアッテネータが設定され，本機能は設定できません。

表 5.2.2-2　Gate View Setting ファンクションメニューの説明（続き）

メニュー表示	機能
Pre-Amp (On/Off)	Spurious Emission が On のときのプリアンプの On/Off を選択します。 Spurious Emission が Off のときは周波数ドメインと同じプリアンプの On/Off が選択され，本機能は選択できません。また，オプション 008 6GHz プリアンプが実装されていない場合も本機能は選択できません。

第6章　プリセレクタチューニング機能

この章では，本器のプリセレクタチューニング機能について説明します。

6.1　プリセレクタチューニング機能 6-2
6.1.1　Preselector Auto Tune の設定 6-3
6.1.2　Preselector の Manual 設定 6-3

6.1　プリセレクタチューニング機能

プリセレクタを同調させるための設定を行います。
本機能は MS2691A/MS2692A のみ実行できます。

Accessory ファンクションメニューの F7 (Preselector) を押すと，Preselector ファンクションメニューが表示されます。

表 6.1-1　Preselector ファンクションメニュー

Function keys	メニュー表示	機能
F1	Preselector Auto Tune	プリセレクタの自動同調を行います。 6.1.1 Preselector Auto Tune
F2	Manual	プリセレクタの手動同調を行います。 6.1.2 Preselector の Manual 設定
F3	Preselector Tune Preset	プリセレクタのピーキングバイアス値を工場出荷時の状態に戻します。

本器は，管面上に本物の信号のみが現れるようにするため，イメージレスポンスやマルチプルレスポンスなどの不要波レスポンスを除去するプリセレクタを使用しています。プリセレクタはアナライザの受信周波数に追従する可変同調形の帯域通過フィルタです。プリセレクタで正しく同調をとるためには，ピーキングバイアスを調整する必要があります。

本器は工場出荷時にあらかじめ調整されているため，通常の使用においてピーキングバイアス値を調整する必要はありませんが，同調周波数が正しくない場合は受信レベルが小さくなるため，最大レスポンスが得られるようにプリセレクタの同調周波数を調整する機能（プリセレクタチューニング機能）があります。

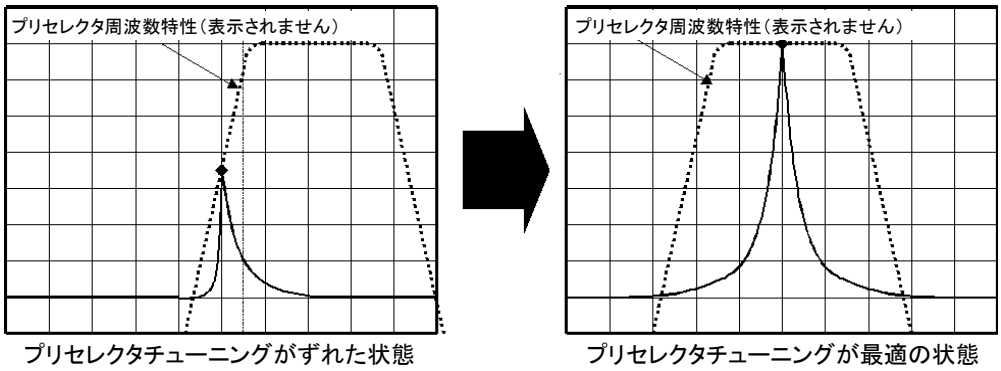

図 6.1-1　Preselector の同調

プリセレクタの同調は無変調信号を使用してください。変調信号の場合は，正確に同調できない場合があります。

変調信号の測定時は，信号発生器などから無変調信号を入力し，プリセレクタを同調させてから測定してください。

6.1.1 Preselector Auto Tuneの設定

プリセレクタのピーキングバイアス値を自動調整し，プリセレクタの自動同調を行います。

下記の場合，設定できません。

- オプション 067/167 搭載，かつ Preselector Bypass ON
- 周波数スパンが 500 MHz 超
- Frequency Band Mode が Normal，かつ中心周波数≦6.0 GHz
- Frequency Band Mode が Spurious，かつ中心周波数≦4.0 GHz

操作例：無変調信号を入力し，プリセレクタを自動同調する

＜手順 1＞

1. Frequency を押します。
2. F5 （Preselector Auto Tune）を押します。

＜手順 2＞

1. メインファンクションメニューのページ 1 で F8 （Accessory）を押します。
2. F7 （Preselector）を押したあと，F1 （Preselector Auto Tune）を押します。

6.1.2 PreselectorのManual設定

プリセレクタのピーキングバイアス値を設定し，プリセレクタを手動同調します。

操作例：プリセレクタを手動同調する

＜手順＞

1. メインファンクションメニューのページ 1 で F6 （Accessory）を押します。
2. F7 （Preselector）を押したあと，F2 （Manual）を押します。
3. 表示される信号レベルが最大となるようにロータリノブまたはカーソルキーでピーキングバイアス値を調整します。

設定範囲：　–128～127 MHz
分解能：　1 MHz

ピーキングバイアス値を工場出荷時の状態に戻すには，F3 （Preselector Tune Preset）を押します。

第7章　Measure 機能

この章では，本アプリケーションの Measure 機能について説明します。

7.1　Measure 機能の選択 7-2
7.2　隣接チャネル漏洩電力測定（ACP） 7-4
7.3　バースト内平均電力測定（Burst Average Power） 7-12
7.4　チャネルパワー測定（Channel Power） 7-14
7.5　占有帯域幅測定（Occupied Bandwidth） 7-16
7.6　スペクトラムエミッションマスク測定
（Spectrum Emission Mask） 7-18
7.7　スプリアスエミッション測定（Spurious Emission） 7-29
7.8　2 信号 3 次歪み 7-47

7.1　Measure 機能の選択

メインファンクションメニューのページ 2 で F2 (Measure)を押す，あるいは Measure を押すと，Measure ファンクションメニューが表示されます。

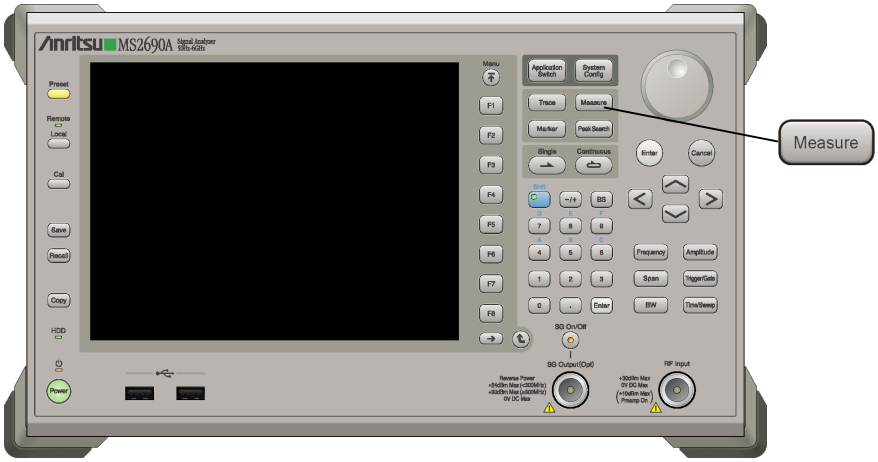

図 7.1-1　Measure キー

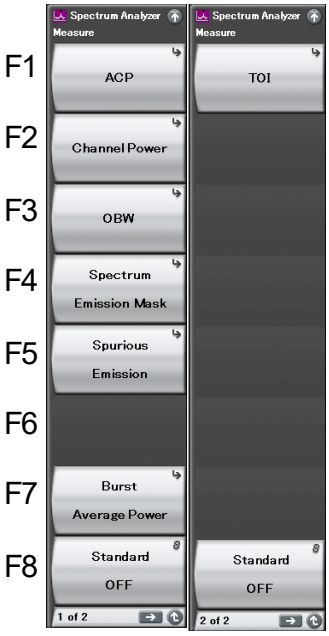

図 7.1-2　Measure ファンクションメニュー

表 7.1-1　Measure ファンクションメニューの説明

メニュー表示	機能
ページ 1	Measure
ACP	隣接チャネル漏洩電力を測定します。
Channel Power	指定周波数帯域内の電力を測定します。 チャネル中心周波数，チャネル帯域幅，およびフィルタを設定します。
OBW	占有帯域幅を測定します。 メソッド，N%法の%パワー，または X dB 法で dB 値を設定します。
Burst Average Power	バースト内平均電力を測定します。
Spectrum Emission Mask	スペクトラムエミッションマスク測定を行います。 周波数ドメインの規格線を設定し，規格に対する良否判定をします。
Spurious Emission	スプリアスエミッション測定を行います。
Standard	入力信号の通信方式を指定することで，通信方式に応じたパラメータの自動設定を行います。 OFF 以外が選択されているときに各 Measure 機能のファンクションメニューに移動すると，通信方式に応じたパラメータが自動的に読み込まれます。 ☞ 付録 C　Standard パラメーター覧
ページ 2	Measure
TOI	2 信号 3 次歪みを測定します。 ☞ 7.8 2 信号 3 次歪み
Standard	ページ 1 と共通のファンクションキーです。

7.2　隣接チャネル漏洩電力測定（ACP）

Measure ファンクションメニューで F1（ACP）を押すと，ACP ファンクションメニューが表示されます。

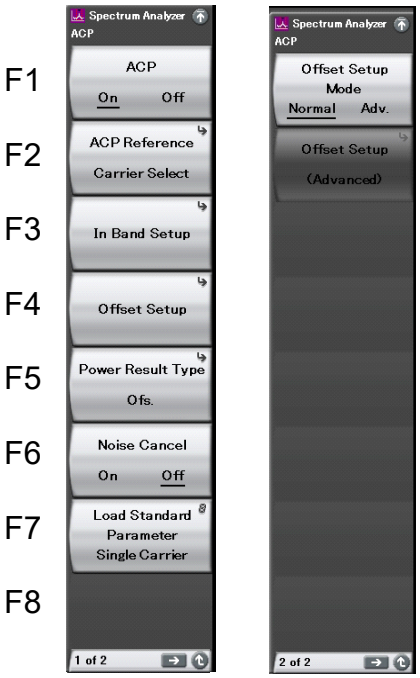

図 7.2-1　ACP ファンクションメニュー

表 7.2-1　ACP ファンクションメニューの説明

メニュー表示	機能
ACP (On/Off)	On に設定した場合，ほかの Measure 機能は Off になります。
ACP Reference	基準電力を設定します。 Span Total: 画面全体の積分パワーを基準とします。 Carrier Total: 全キャリアパワーの合計値を基準とします。 Both Sides of Carriers: 上側のオフセットは最も大きいキャリア番号のキャリアパワーを基準とし，下側のオフセットは最も小さいキャリア番号のキャリアパワーを基準とします。 Carrier Select: Carrier Select で指定したキャリア番号のキャリアパワーを基準とします。
In Band Setup	In Band に関する設定を行います。
Offset Setup	Offset Channel に関する設定を行います。 Offset Setup Mode が Normal のとき使用します。
Power Result Type (Carrier/Ofs/all.)	パワー結果表示を切り替えます。Carrier 選択時はキャリアパワー結果が，Ofs. 選択時は Offset Channel パワー結果が，All 選択時は両方が表示されます。
Noise Cancel (On/Off)	ノイズキャンセル機能の On/Off を設定します。 On に設定した場合には，本器の内部雑音を測定し，測定結果から差し引きます。 本機能は Standard Parameter が設定されているときのみ実行可能です。 *注:* 入力信号のレベルが高い場合，内部雑音を正しく測定できないことがありますので注意してください。
Load Standard Parameter	Standard に Off 以外が設定されているとき，Standard で選択されている通信方式に応じた測定パラメータを読み出します。 ☞ 付録 C　Standard パラメーター覧
Offset Setup Mode	Offset の設定内容が異なるモード Normal/Adv.のどちらかを選択します。 Adv.を選択した場合，設定可能な Offset が増えるため，測定結果グラフの表示が変わります。
Offset Setup (Advanced)	Offset Channel に関する設定を行います。 Offset Setup Mode が Adv.のとき使用します。

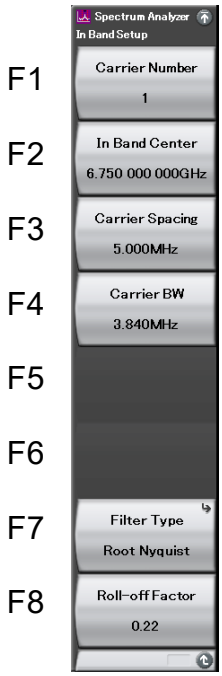

図 7.2-2　In Band Setup ファンクションメニュー

表 7.2-2　In Band Setup ファンクションメニューの説明

メニュー表示	機能
Carrier Number	キャリア数を設定します。
In Band Center	In Band の中心周波数を設定します。
Carrier Spacing	キャリア同士の間隔を設定します。
Carrier BW	キャリアの帯域幅を設定します。
Filter Type	キャリアのフィルタの形状を設定します。 形状は矩形，ナイキスト，またはルートナイキストから選択します。
Roll-off Factor	ロールオフ率を設定します。 Filter Type にナイキストまたはルートナイキストが選択されている時のみ有効です。

Offset Setup ファンクションメニューは 2 ページからなります。➔ を押すことで，ページを変更することができます。

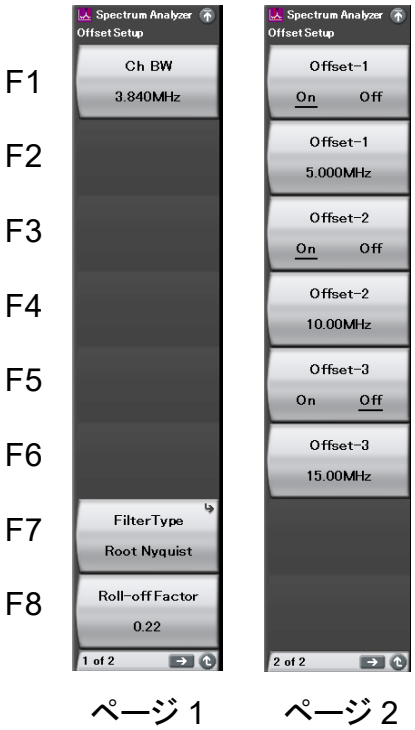

図 7.2-3　Offset Setup ファンクションメニュー

表 7.2-3　Offset Setup ファンクションメニューの説明

メニュー表示	機能
Ch BW	Offset Channel の帯域幅を設定します。
Filter Type	Offset Channel のフィルタの形状を設定します。 形状は矩形，ナイキスト，またはルートナイキストから選択します。
Roll-off Factor	ロールオフ率を設定します。 Filter Type にナイキストまたはルートナイキストが選択されている時のみ有効です。
Offset-1(On/Off)	Offset Channel 1 の On/Off を設定します。
Offset-1	Offset Channel 1 のオフセット周波数を設定します。
Offset-2(On/Off)	Offset Channel 2 の On/Off を設定します。
Offset-2	Offset Channel 2 のオフセット周波数を設定します。
Offset-3(On/Off)	Offset Channel 3 の On/Off を設定します。
Offset-3	Offset Channel 3 のオフセット周波数を設定します。

Offset Setup (Advanced) ファンクションメニューは 8 ページからなります。➔ を押すことで，ページを変更することができます。

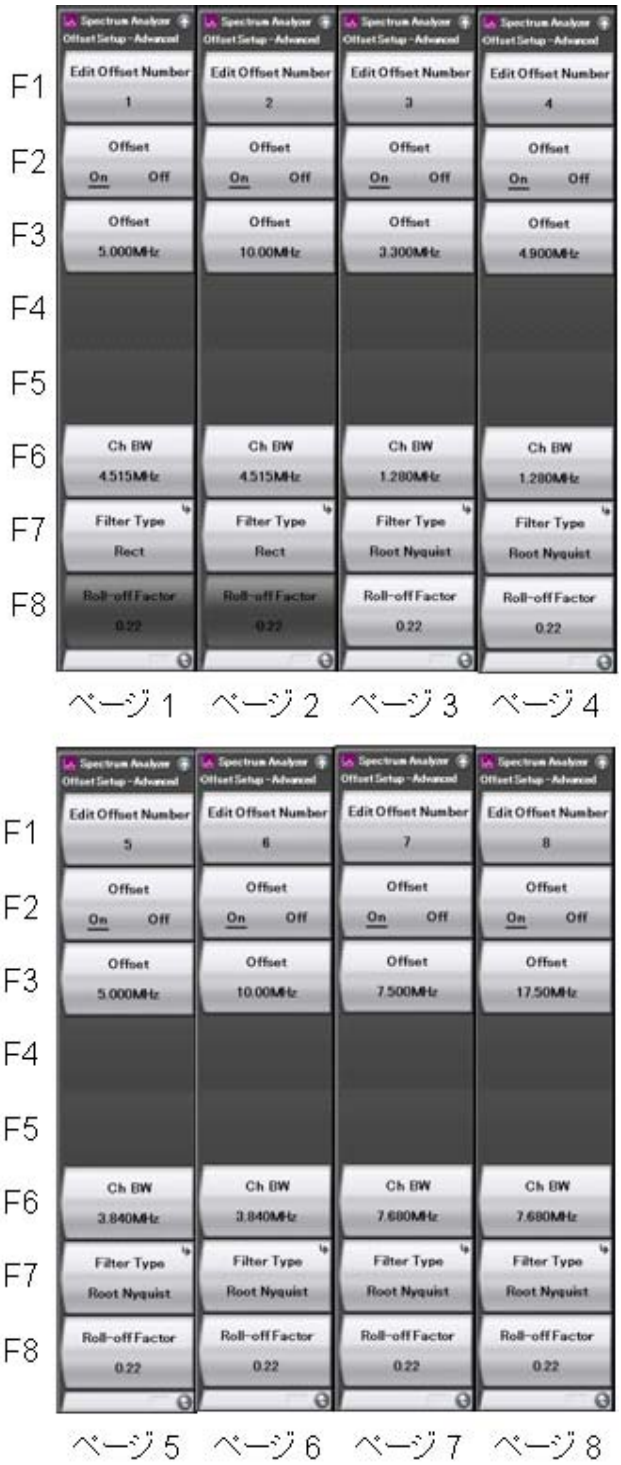

図 7.2-4　Offset Setup (Advanced) ファンクションメニュー

表 7.2-4　Offset Setup (Advanced) ファンクションメニューの説明

メニュー表示	機能
Edit Offset Number	編集する Offset の番号を選択します。 1～8 まで選択できます。
Offset (On/Off)	選択した Offset Channel の On/Off を設定します。
Offset	選択した Offset Channel のオフセット周波数を設定します。
Ch BW	選択した Offset Channel の帯域幅を設定します。
Filter Type	選択した Offset Channel のフィルタの形状を設定します。 形状は矩形，ナイキスト，またはルートナイキストから選択します。
Roll-off Factor	選択した Offset Channel のロールオフ率を設定します。 Filter Type にナイキストまたはルートナイキストが選択されている時のみ有効です。

Power Result Type が Offset に設定されているときの測定結果の表示項目について説明します。

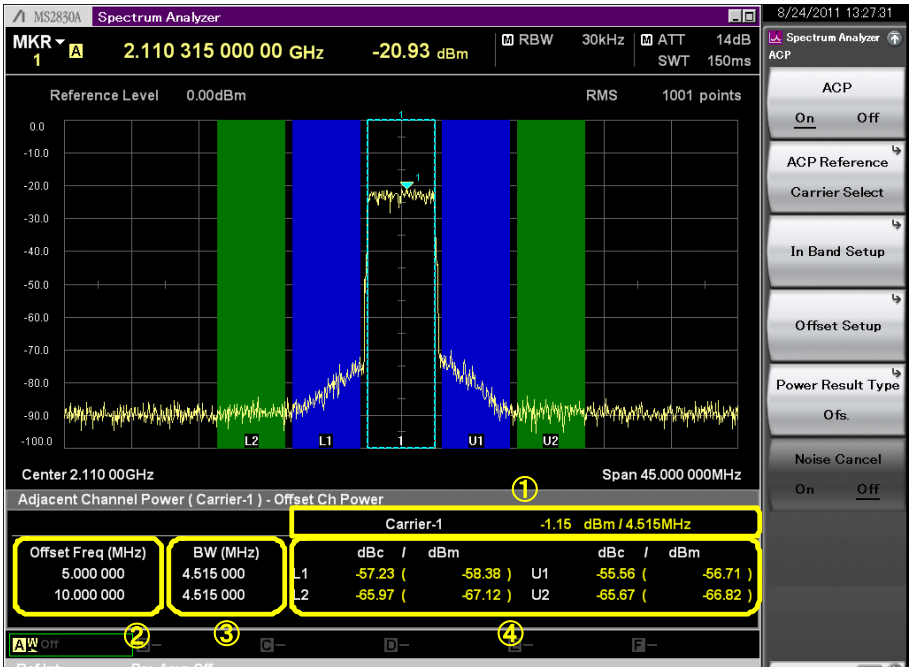

図 7.2-5　測定結果の表示項目

表 7.2-5　測定結果の表示項目の説明

番号	表示	内容
①	Span Total/ Carrier Total/ Carrier-X	ACP Reference が Span Total のとき，画面表示帯域内の積算電力が表示されます。また，ACP Reference が Carrier Total のとき，Carrier の積算電力が表示されます。ACP Reference が Carrier Select の時は選択されたキャリアの電力が表示されます。ACP Reference が Both Sides of Carriers の時は両端のキャリア電力が表示されます。
②	Offset Freq （MHz）	オフセット周波数の設定値を表示します。
③	BW（MHz）	チャネル帯域幅の設定値を表示します。
④	L1/L2/U1/U2	Offset-1～3を中心とした Offset Channel 帯域幅の電力と ACP Reference で選択された基準電力との相対値が表示されます。また，( ) 内には Offset-1～3を中心とした Offset Channel 帯域幅の絶対電力が表示されます。

Power Result Type が Carrier に設定されているときの測定結果の表示項目について説明します。

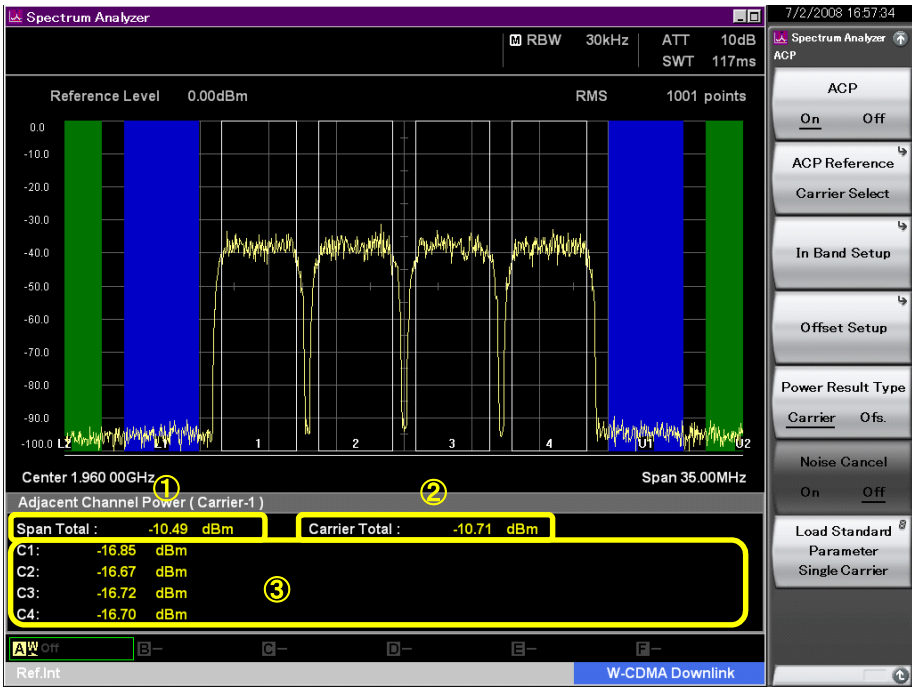

図 7.2-6　測定結果の表示項目

表 7.2-6　測定結果の表示項目の説明

番号	表示	内容
①	Span Total	画面表示帯域内の積算電力が表示されます。 ACP Reference の設定に関係なく表示されます。
②	Carrier Total	Carrier Number で設定されたキャリアの積算電力が表示されます。 ACP Reference が Span Total に設定されているときは，表示されません。
③	Cx (x: Carrier Number)	Carrier Number で設定された数の各キャリアの電力が表示されます。 ACP Reference が Span Total に設定されているときは，表示されません。

7.3　バースト内平均電力測定（Burst Average Power）

Measure ファンクションメニューで F7（Burst Average Power）を押すと，Burst Average Power ファンクションメニューが表示されます。

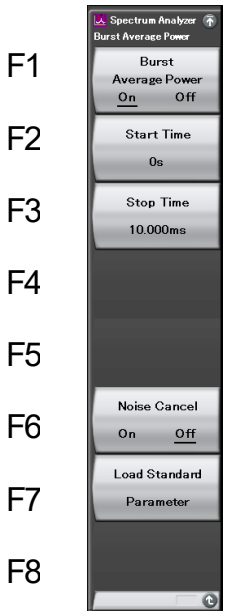

図 7.3-1　Burst Average Power ファンクションメニュー

表 7.3-1　Burst Average Power ファンクションメニューの説明

メニュー表示	機能
Burst Average Power（On/Off）	On に設定した場合，ほかの Measure 機能は Off になります。
Start Time	測定区間の開始位置（時間）を設定します。
Stop Time	測定区間の終了位置（時間）を設定します。
Noise Cancel（On/Off）	ノイズキャンセル機能の On/Off を設定します。 On に設定した場合には，本器の内部雑音を測定し，測定結果から差し引きます。 本機能は Standard Parameter が設定されているときのみ実行可能です。 *注：* 入力信号のレベルが高い場合，内部雑音を正しく測定できないことがありますので注意してください。
Load Standard Parameter	Standard に Off 以外が設定されているとき，Standard で選択されている通信方式に応じた測定パラメータを読み出します。 ☞ 付録 C　Standard パラメーター覧

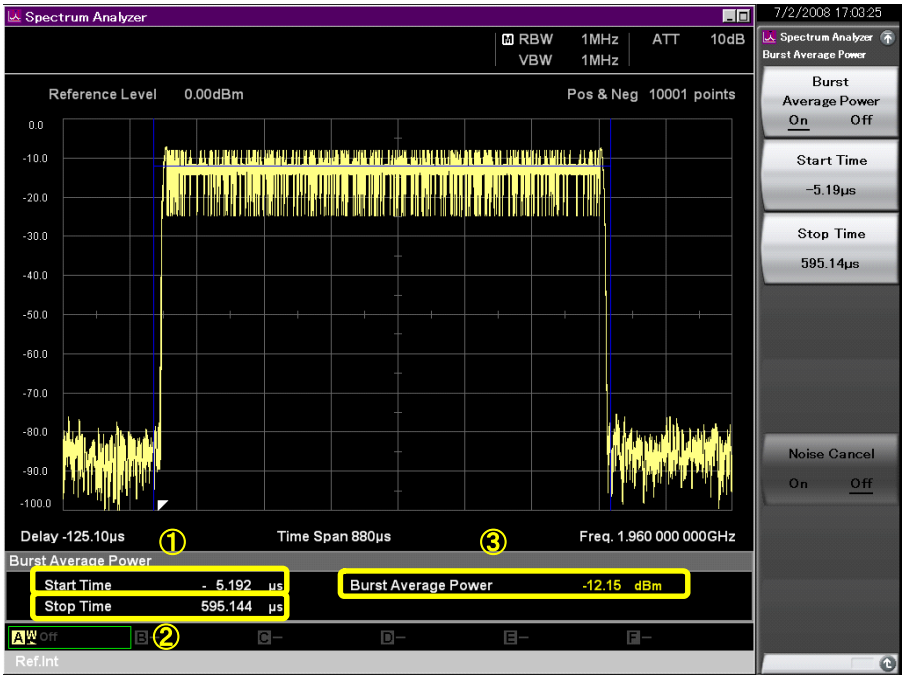

図 7.3-2　測定結果の表示項目

表 7.3-2　測定結果の表示項目の説明

番号	表示	内容
①	Start Time	測定区間の開始位置(時間)を表示します。
②	Stop Time	測定区間の終了位置(時間)を表示します。
③	Burst Average Power	Start Time～Stop Time で指定された区間の平均電力を表示します。

7.4　チャネルパワー測定（Channel Power）

Measure ファンクションメニューで F2（Channel Power）を押すと，Channel Power ファンクションメニューが表示されます。

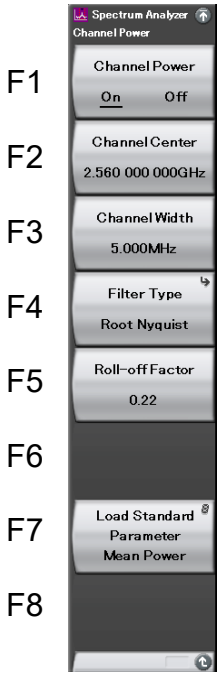

図 7.4-1　Channel Power ファンクションメニュー

表 7.4-1　Channel Power ファンクションメニューの説明

メニュー表示	機能
Channel Power（On/Off）	On に設定した場合，ほかの Measure 機能は Off になります。
Channel Center	チャネル中心周波数を設定します。
Channel Width	チャネル帯域幅を設定します。
Filter Type	フィルタの形状を設定します。 形状は矩形，ナイキスト，またはルートナイキストから選択します。
Roll-off Factor	ロールオフ率を設定します。Filter Type にナイキストまたはルートナイキストが選択されているときのみ有効です。
Load Standard Parameter	Standard に Off 以外が設定されているとき，Standard で選択されている通信方式に応じた測定パラメータを読み出します。 ☞ 付録 C　Standard パラメーター覧

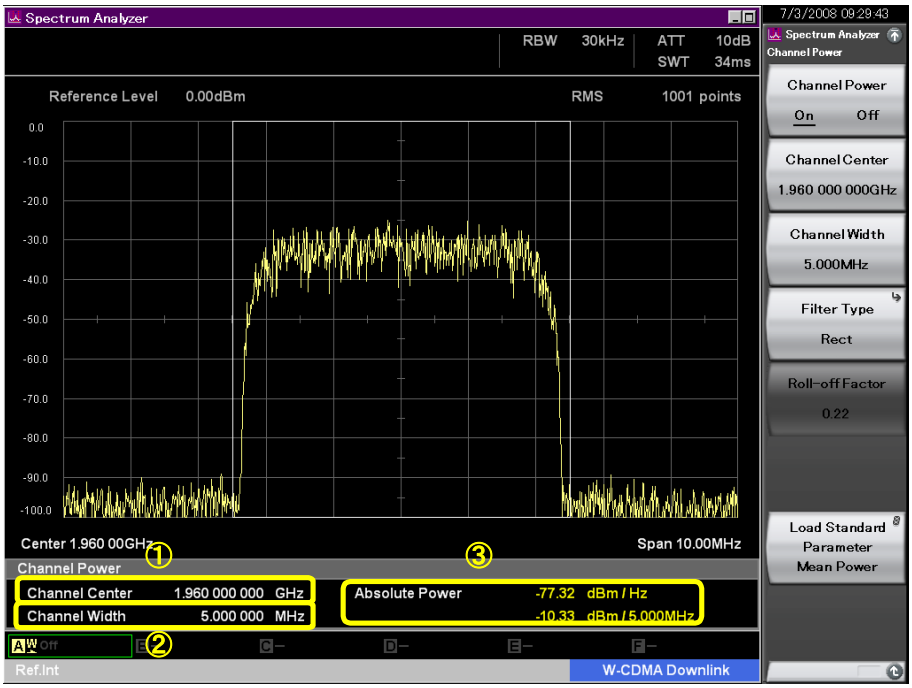

図 7.4-2　測定結果の表示項目

表 7.4-2　測定結果の表示項目の説明

番号	表示	内容
①	Channel Center	チャネル中心周波数の設定値が表示されます。
②	Channel Width	チャネル帯域幅の設定値が表示されます。
③	Absolute Power	チャネル帯域内の 1 Hz あたりの絶対電力とチャネル帯域内の積算電力が表示されます。

7.5　占有帯域幅測定（Occupied Bandwidth）

Measure ファンクションメニューで F3（Occupied Bandwidth）を押すと，Occupied Bandwidth ファンクションメニューが表示されます。

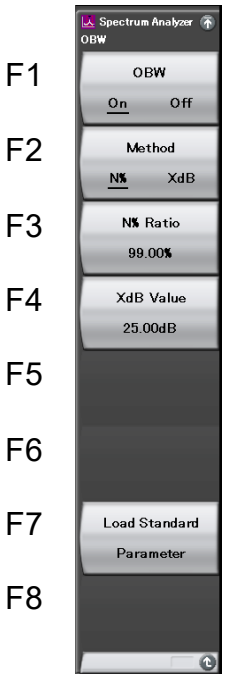

図 7.5-1　Occupied Bandwidth ファンクションメニュー

表 7.5-1　Occupied Bandwidth ファンクションメニューの説明

メニュー表示	機能
OBW（On/Off）	On に設定した場合，ほかの Measure 機能は Off になります。
Method （N%/XdB）	測定方法を選択します。 X dB Down モードまたは N% of Power モードを選択します。 ・ XdB Down モード トレースデータのピーク点から XdB 降下した 2 点の幅を OBW とします。 ・ N% of Power モード 画面内のトレースデータの電力総和を 100%とし，N%相当の電力となる 2 点の幅を OBW とします。
N% Ratio	N% of Power モードで%パワーを入力します。
XdB Value	X dB Down モードで dB 値を入力します。
Load Standard Parameter	Standard に Off 以外が設定されているとき，Standard で選択されている通信方式に応じた測定パラメータを読み出します。 ☞ 付録 C　Standard パラメーター覧

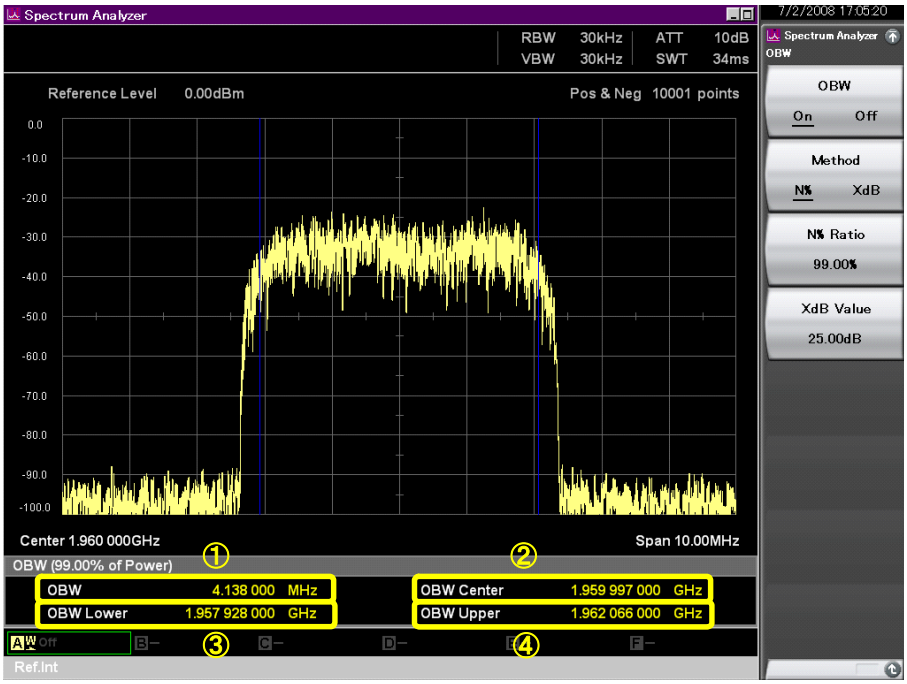

図 7.5-2　測定結果の表示項目

表 7.5-2　測定結果の表示項目の説明

番号	表示	内容
①	OBW	占有帯域幅が表示されます。
②	OBW Center	占有帯域幅の中心周波数が表示されます。
③	OBW Lower	占有帯域幅の左側の周波数が表示されます。
④	OBW Upper	占有帯域幅の右側の周波数が表示されます。

7.6　スペクトラムエミッションマスク測定（Spectrum Emission Mask）

Measure ファンクションメニューで F4 (Spectrum Emission Mask)を押すと，Spectrum Emission Mask ファンクションメニューが表示されます。

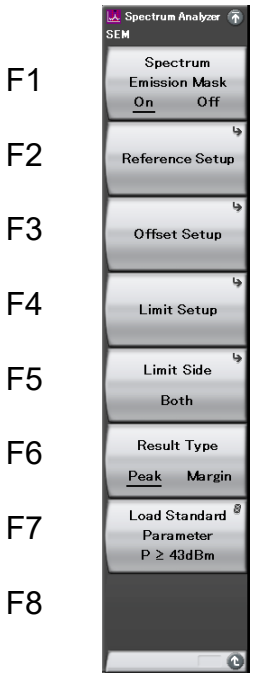

図 7.6-1　Spectrum Emission Mask ファンクションメニュー

表 7.6-1　Spectrum Emission Mask ファンクションメニューの説明

メニュー表示	機能
Spectrum EmissionMask（On/Off）	On に設定した場合，ほかの Measure 機能は Off になります。
Reference Setup	基準キャリアを設定します。
Offset Setup	オフセットを設定します。
Limit Setup	規格線を設定します。
Limit Side	判定対象とする規格線の側を選択します。 ・ Both 基準の両側で判定を行います。 ・ Lower 基準より低い周波数だけで判定を行います。 ・ Upper 基準より高い周波数だけで判定を行います。 測定停止状態で本パラメータを変更すると，測定結果が初期値に戻ります（Result に“***”が表示されます）。規格線は測定結果を参照するため，この状態では設定された位置に規格線を表示しておりません。規格線を更新する場合は Single を押して，再度測定を行ってください。
Result Type	各オフセットのレベル結果の表示を切り替えます。 ・ Peak 絶対電力で表示します。 ・ Margin 規格線と測定値の相対電力で表示します。
Load Standard Parameter	Standard に Off 以外が設定されているとき，Standard で選択されている通信方式に応じた測定パラメータを読み出します。 付録 C　Standard パラメーター覧

Reference Setup ファンクションメニューは 3 ページからなります。➔ を押すことで，ページを変更することができます。

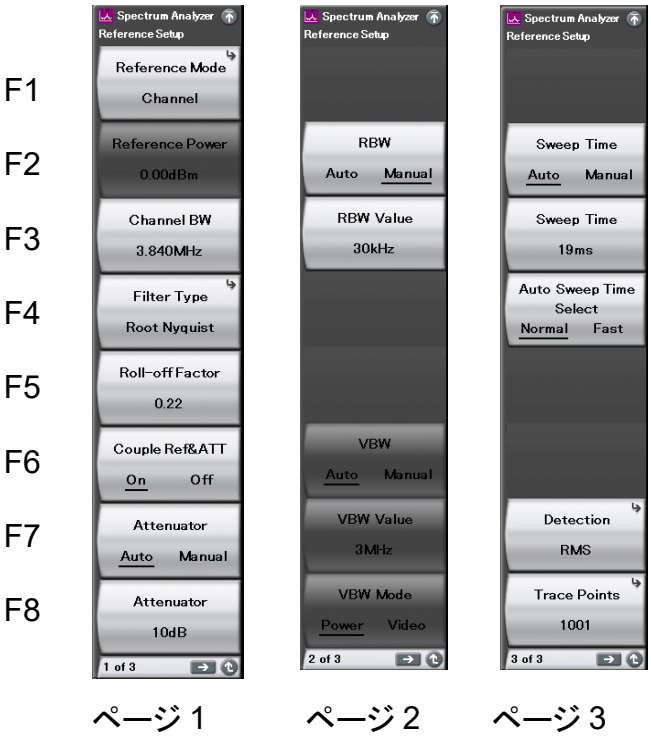

図 7.6-2　Reference Setup ファンクションメニュー

表 7.6-2　Reference Setup ファンクションメニューの説明

メニュー表示	機能
Reference Mode	基準電力の算出方法を選択します。 ・ Channel Channel BW で設定された範囲の積分電力を基準とします。 ・ Peak Channel BW で設定された範囲のピーク電力を基準とします。 ・ Fix Reference Power で設定された値を基準とします。
Reference Power	Reference Mode が Fix の時の基準電力を設定します。
Channel BW	基準電力測定時の帯域幅を設定します。
Filter Type	基準電力測定時のフィルタ形状を設定します。矩形，ナイキスト，ルートナイキストから選択します。
Roll-off Factor	ロールオフ率を設定します。 Filter Type にナイキストまたはルートナイキストが選択されている時のみ有効です。
Couple Ref&ATT	本機能が On の場合は，Offset Setup の Reference Level と Attenuator は，Reference Setup で設定されているものと同じ値を用いて測定されます。
Attenuator Auto/Manual	基準電力測定時のアッテネータの自動／手動設定を切り替えます。
Attenuator	基準電力測定時のアッテネータを設定します。
RBW Auto/Manual	基準電力測定時の RBW の自動／手動設定を切り替えます。
RBW Value	基準電力測定時の RBW を設定します。
VBW Auto/Manual	基準電力測定時の VBW の自動／手動設定を切り替えます。 Detection が RMS のとき，変更できません。
VBW Value	基準電力測定時の VBW を設定します。
VBW Mode	基準電力測定時の VBW の種類を設定します。 Detection が RMS のとき，設定に関わらず Power VBW の処理となります。
Sweep Time Auto/Manual	基準電力測定時の Sweep Time の自動／手動設定を切り替えます。
Sweep Time	基準電力測定時の Sweep Time を設定します。
Auto Sweep Time Select	Sweep Time が Auto のときの設定方法を選択します。
Detection	基準電力測定時の検波方式を設定します。
Trace Points	基準電力測定時のトレースポイントを設定します。

Offset Setup ファンクションメニューは 4 ページからなります。➔ を押すことで，ページを変更することができます。

図 7.6-3　Offset Setup ファンクションメニュー

表 7.6-3　Offset Setup ファンクションメニューの説明

メニュー表示	機能
Edit Offset Number	設定対象となるオフセットを選択します。
Offset On/Off	オフセットの On/Off を設定します。
Start Freq	オフセットの開始周波数を設定します。Center Freq からのオフセット値を設定します。
Stop Freq	オフセットの終端周波数を設定します。Center Freq からのオフセット値を設定します。
Reference Level Auto/Manual	リファレンスレベルの Auto/Manual を選択します。Auto 時は基準電力測定時のリファレンスレベルと同じ値となります。
Reference Level	オフセット測定時のリファレンスレベルを設定します。
Attenuator Auto/Manual	オフセット測定時のアッテネータの自動／手動設定を切り替えます。
Attenuator	オフセット測定時のアッテネータを設定します。
RBW Auto/Manual	オフセット測定時の RBW の自動／手動設定を切り替えます。
RBW Value	オフセット測定時の RBW を設定します。
Integrate BW Auto/Manual	トレースデータの作成の際の分解能帯域幅を設定します。Auto 時は RBW と同じ値となります。
Integrate BW	RBW で掃引されたトレースデータを Integrate BW に帯域換算し表示します。本機能には以下の特徴があります。 ・ 用意されている RBW 以外の分解能帯域幅で測定を行うことができます。 ・ 指定された帯域幅を小さい RBW によって実現するため，よりよい選択度が得られます。
VBW Auto/Manual	オフセット測定時の VBW の自動／手動設定を切り替えます。 Detection が RMS のとき，変更できません。
VBW Value	オフセット測定時の VBW を設定します。
VBW Mode	オフセット測定時の VBW の種類を設定します。 Detection が RMS のとき，設定に関わらず Power VBW の処理となります。
Sweep Time Auto/Manual	オフセット測定時の Sweep Time の自動／手動設定を切り替えます。
Sweep Time	オフセット測定時の Sweep Time を設定します。
Auto Sweep Time Select	Sweep Time が Auto のときの設定方法を選択します。
Detection	オフセット測定時の検波方式を設定します。
Trace Points	オフセット測定時のトレースポイントを設定します。
Display Offset	画面に表示するオフセットを選択します。 ・ 1-6：オフセット 1-6 を表示します。 ・ 7-12：オフセット 7-12 を表示します。

Spectrum Emission Mask ファンクションメニューで F4 (Limit Setup)を押すと，Limit Setup ファンクションメニューが表示されます。

図 7.6-4　Limit Setup ファンクションメニュー

表 7.6-4　Limit Setup ファンクションメニューの説明

メニュー表示	機能
Edit Offset Number	設定対象となるオフセットを選択します。
Fail Logic	Pass/Fail の判定方法を指定します。 ・ ABS1 絶対レベル上限 1 で判定を行います。 ・ REL 相対レベル上限で判定を行います。 ・ ABS1 and REL 絶対レベル上限 1 と相対レベル上限で AND 判定を行います。 ・ ABS1 or REL 絶対レベル上限 1 と相対レベル上限で OR 判定を行います。 ・ ABS1 and ABS2 絶対レベル上限 1 と絶対レベル上限 2 で AND 判定を行います。 ・ (ABS1 and REL) and ABS2 絶対レベル上限 1 と相対レベル上限で AND 判定を行います。その結果と絶対レベル上限 2 で AND 判定を行います。 ・ (ABS1 or REL) and ABS2 絶対レベル上限 1 と相対レベル上限で OR 判定を行います。その結果と絶対レベル上限 2 で AND 判定を行います。 ・ Off 判定を行いません。 AND 判定は，2 つの規格線を重ねたときに，より低いレベルを規格線として判定する方法です。OR 判定は 2 つの規格線を重ねたときに，より高いレベルを規格線として判定する方法です。
ABS1 Start Level	オフセット開始周波数の絶対レベル上限 1 を設定します。
ABS1 Stop Level	オフセット終端周波数の絶対レベル上限 1 を設定します。
ABS2 Start Level	オフセット開始周波数の絶対レベル上限 2 を設定します。
ABS2 Stop Level	オフセット終端周波数の絶対レベル上限 2 を設定します。
REL Start Level	オフセット開始周波数の相対レベル上限を設定します。
REL Stop Level	オフセット終端周波数の相対レベル上限を設定します。

測定結果の表示項目について説明します。

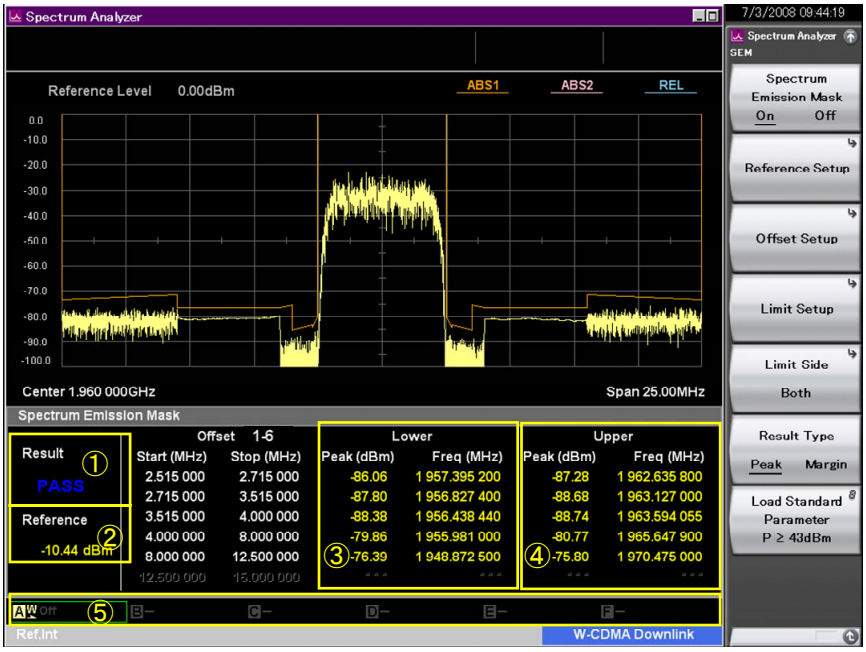

図 7.6-5　測定結果の表示項目

表 7.6-5　測定結果の表示項目の説明

番号	表示	内容
①	Result	Pass/Fail 判定結果を表示します。すべてのオフセットの判定結果が Pass の場合は「PASS」が表示されます。それ以外の場合は「FAIL」と表示されます。
②	Reference	基準電力を表示します。
③	Lower	基準の左側のオフセットの結果を表示します。 規格線が設定されている場合，（規格線–測定値）が最も小さくなる周波数と，Result Type が Peak の時はそのレベル（測定値），Margin の時はマージン（規格線－測定値）を表示します。
④	Upper	基準の右側のオフセットの結果を表示します。 規格線が設定されている場合，（規格線–測定値）が最も小さくなる周波数と，Result Type が Peak の時はそのレベル（測定値），Margin の時はマージン（規格線－測定値）を表示します。
⑤	トレースパラメータ	ストレージモード，ストレージ回数，トレース書き込み方式を表示します。 Spectrum Emission Mask 測定時，ストレージ回数の表示が%表示になります。 ☞ 3.1.2 アベレージング機能

測定停止状態で再取り込みが必要となるパラメータが変更されると，測定結果が初期値に戻ります（Result に“***”が表示されます）。規格線は測定結果を参照するため，この状態では設定された位置に規格線を表示していません。規格線を更新する場合は Single を押して，再度測定を行ってください。

Integrate BW（以下，IBW）が Manual 設定のときは，Offset メニューで設定された，RBW，Sweep Time，Detection，Trace Point を用いて測定されたデータを，IBW の幅ずつ積分しながら表示します。そのため，画面上には Start Freq～Stop Freq の範囲で結果が表示されますが，実際の掃引は Start Freq – IBW/2 ～Stop Freq + IBW/2 の範囲で行っています。

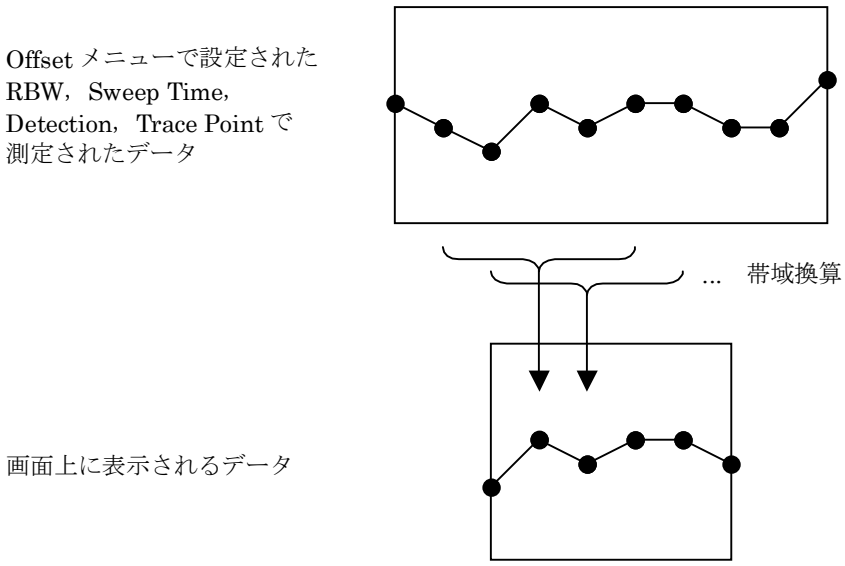

図 7.6-6　IBW による帯域換算

IBW 設定値と実際の積分幅との間には，トレースポイントの周波数分解能に応じて誤差が発生します。このときの誤差（Error [Hz]）は下式により算出できます。

$$|Error| \leqq \frac{StopFreq - StartFreq}{\left\{ OddF\left(TracePoint \cdot \frac{StopFreq - StartFreq}{IBW + (StopFreq - StartFreq)} \right) \right\} - 1}$$

ただし，OddF(x)は，x 以下で最も大きい奇数を返す関数を意味しています。

Trace Point を大きくすることで，IBW の誤差を小さくすることができます。たとえば，Start Freq = 4 MHz, Stop Freq = 8 MHz, Trace Point = 1001, IBW = 1 MHz の場合，IBW の誤差（Error [Hz]）は

$$|Error| \leqq 5013 \quad \text{[Hz]}$$

となりますが，Trace Point が 10001 の場合では

$$|Error| \leqq 501 \quad \text{[Hz]}$$

となります。

また，線スペクトラムを測定する場合は，RBW の形状による誤差を小さくするため，IBW ≧ 3 × RBW となるように設定してください。

7.7　スプリアスエミッション測定（Spurious Emission）

スプリアスエミッション測定は，あらかじめ設定された掃引区間（セグメント）の掃引を行い，スプリアスの検出および一覧表示を行います。また，各セグメントで設定されている規格線により検出されたスプリアスの判定を行い，Pass/Fail 表示を行います。

Measure ファンクションメニューで F5 (Spurious Emission) を押すと，Spurious Emission ファンクションメニューが表示されます。Spurious Emission ファンクションメニューは 3 ページからなります。→ を押すことで，ページを変更することができます。

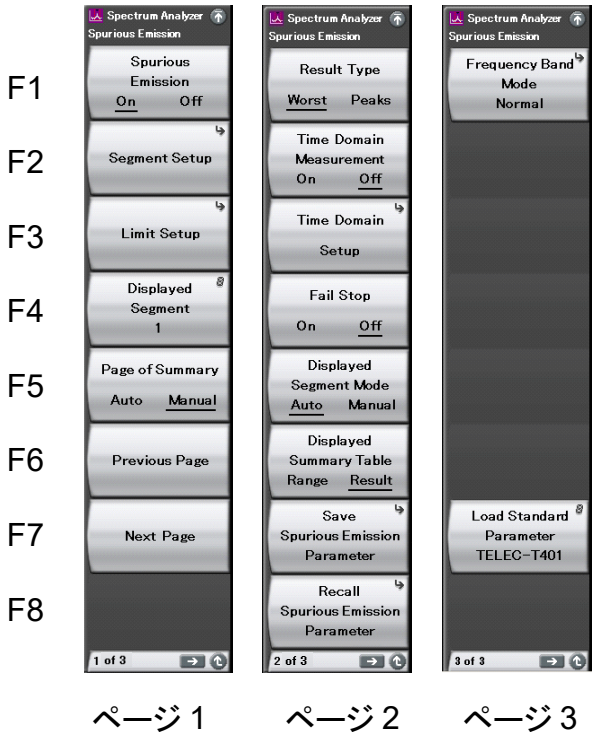

図 7.7-1 Spurious Emission ファンクションメニュー

表 7.7-1　Spurious Emission ファンクションメニューの説明

メニュー表示	機能
Spurious Emission (On/Off)	On に設定した場合，ほかの Measure 機能は Off になります。
Segment Setup	掃引区間（セグメント）を設定します。
Limit Setup	規格線を設定します。
Displayed Segment	トレース表示部に表示するセグメントを設定します。Off となっているセグメントは設定できません。
Page of Summary (Auto/Manual)	サマリ表示部のページ番号の自動設定／手動設定を選択します。自動設定時は，Displayed Segment に対応したページが表示されるように，ページ番号が自動的に切り替わります。 Displayed Summary Table が Result のとき有効です。
Previous Page	サマリ表示部を前のページにします。
Next Page	サマリ表示部を次のページにします。
Result Type (Worst/Peaks)	各セグメントで検出されたスプリアスの表示形式を選択します。 ・ Worst 各セグメントで設定した最も規格線と余裕の無いスプリアスを表示します。 ・ Peaks 各セグメントで設定した Search Resolution，Search Threshold により検出されたスプリアスを表示します。1 セグメントに最大 10 個のスプリアスが表示されます。
Time Domain Measurement (On/Off)	スプリアスの電力を時間ドメインで測定するかどうかの設定をします。On に設定した場合は，Result Type が Worst 固定となります。
Time Domain Setup	Time Domain 測定の設定をします。
Fail Stop (On/Off)	On 設定時は，規格線を超えるスプリアスが検出されると直ちに測定が中断されます。
Displayed Segment Mode (Auto/Manual)	トレース表示部に表示するセグメントの自動設定/手動設定を選択します。自動設定時は，掃引中のセグメントが表示されるように，Displayed Segment が自動的に切り替わります。
Displayed Summary Table	サマリ表示部の表示内容を選択します。 ・ Result 測定結果を表示します。 ・ Range 各セグメントの周波数範囲，RBW，VBW 設定値を表示します。

表 7.7-1　Spurious Emission ファンクションメニューの説明

メニュー表示	機能
Save Spurious Emission Parameter	Spurious Emission 測定のパラメータを保存します。Register1～8 まで保存する Register を選択できます。パラメータが保存されている場合は，保存した年月日・時間・分を表示します。パラメータが保存されていない場合は，“***”が表示されます。
Recall Spurious Emission Parameter	Spurious Emission 測定のパラメータを読み出します。Register1 ～ 8 までパラメータを読み出す Register が選択できます。パラメータが保存されている場合は，保存した年月日・時間・分が表示されます。パラメータが保存されていない場合は，“***”が表示されます。
Frequency Band Mode	Frequency Band Mode メニューを開きます。 ☞ 2.3.6 周波数バンドの変更
Load Standard Parameter	Standard に Off 以外が設定されているとき，Standard で選択されている通信方式に応じた測定パラメータを読み出します。 ただし，Spurious Emission 機能がない Standard Parameter を選択した場合は，本メニューは表示されません。 ☞ 付録 C Standard パラメーター覧

Save Spurious Emission Parameter，Recall Spurious Emission Parameter の対象となるパラメータは以下の通りです。

表 7.7-2　保存，読み出しの対象となるパラメータ

保存，読み出しの対象となるパラメータ
Spurious Emission メニュー以下の全パラメータ（Spurious Emission On/Off は除く）
Frequency Offset On/Off
Frequency Offset Value
Reference Level Offset On/Off
Reference Level Offset Value
Frequency Band Mode
Trigger Switch
Trigger Source
Trigger Slope
Trigger Level（Video）
Trigger Level（Wide IF Video）
Gate Sweep On/Off
Gate Delay
Gate Length
Gate Source
Gate Slope
Gate Level（Wide IF Video）
VBW Mode
Auto Sweep Time Select
Storage Mode

Spurious Emission ファンクションメニューの 1 ページ目で F2（Segment Setup）を押すと，Segment Setup ファンクションメニューが表示されます。Segment Setup ファンクションメニューは 3 ページからなります。→ を押すことで，ページを変更することができます。

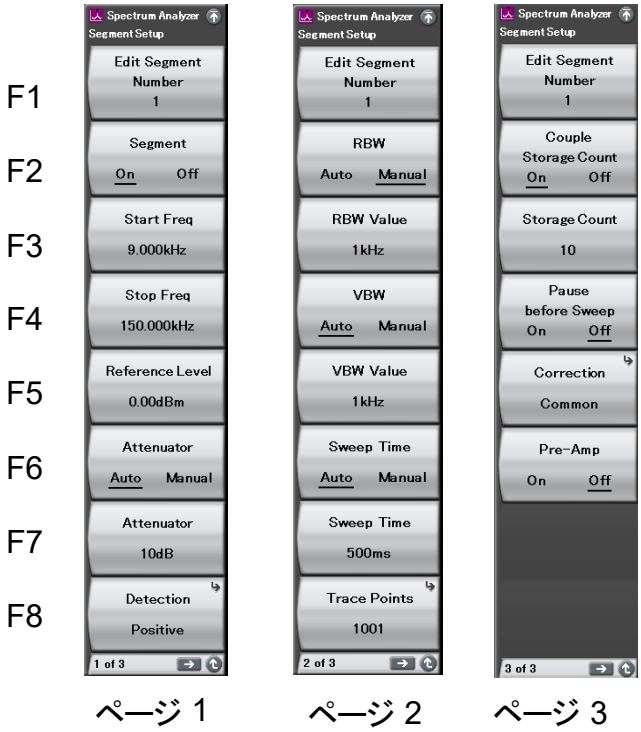

図 7.7-2　Segment Setup ファンクションメニュー

表 7.7-3　Segment Setup ファンクションメニューの説明

メニュー表示	機能
Edit Segment Number	設定対象となるセグメントの番号を選択します。
Segment	セグメントの On/Off を設定します。
Start Freq	セグメントのスタート周波数を設定します。
Stop Freq	セグメントのストップ周波数を設定します。
Reference Level	セグメントのリファレンスレベルを設定します。
Attenuator (Auto/Manual)	セグメントのアッテネータの自動／手動設定を切り替えます。
Attenuator	セグメントのアッテネータ値を設定します。
Detection	セグメントの検波方式を設定します。
RBW (Auto/Manual)	セグメントの RBW の自動／手動設定を切り替えます。
RBW Value	セグメントの RBW を設定します。
VBW (Auto/Manual)	セグメントの VBW の自動／手動設定を切り替えます。 VBW Mode は全セグメント共通で BW ファンクションメニューの設定が適用されます。 Detection が RMS のとき，変更できません。
VBW Value	セグメントの VBW を設定します。
Sweep Time (Auto/Manual)	セグメントの Sweep Time の自動／手動設定を切り替えます。 Auto Sweep Time Select は全セグメント共通で Time/Sweep ファンクションメニューの設定が適用されます。
Sweep Time	セグメントの Sweep Time を設定します。
Trace Points	セグメントのトレースポイントを設定します。
Couple Storage Count (On/Off)	ストレージ回数の共有設定の On/Off を設定します。On のときは，全セグメントで同一のストレージ回数が設定されます。
Storage Count	セグメントのストレージ回数を設定します。
Pause before Sweep (On/Off)	セグメントの掃引開始前に一時停止するかどうかの設定をします。On のときは，次のセグメントの掃引開始前にダイアログボックスが表示され，測定が一時停止します。
Correction	セグメントで使用する補正テーブルを設定します。
Pre-Amp (On/Off)	セグメントのプリアンプの On/Off を設定します。

Segment Setup ファンクションメニューの 3 ページ目で F5（Correction）を押すと，Correction ファンクションメニューが表示されます。

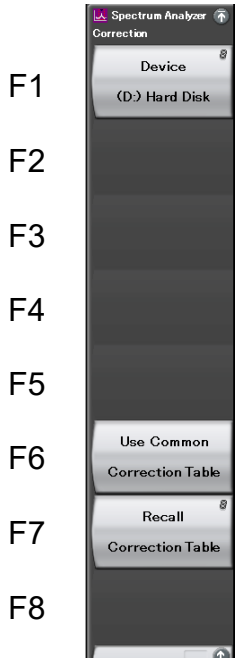

図 7.7-3　Correction ファンクションメニュー

表 7.7-4　Correction ファンクションメニューの説明

メニュー表示	機能
Device	ドライブを選択します。
Use Common Correction Table	通常の補正テーブルを使用します。
Recall Correction Table	設定対象セグメントで使用するレベル周波数補正テーブルのファイルを指定して選択します。

補正テーブルの詳細は，MS2690A/MS2691A/MS2692A シグナルアナライザ取扱説明書（本体操作編）の「3.4.10 Correction」を参照してください。

Spurious Emission ファンクションメニューの 1 ページ目で F3 (Limit Setup)を押すと，Limit Setup ファンクションメニューが表示されます。

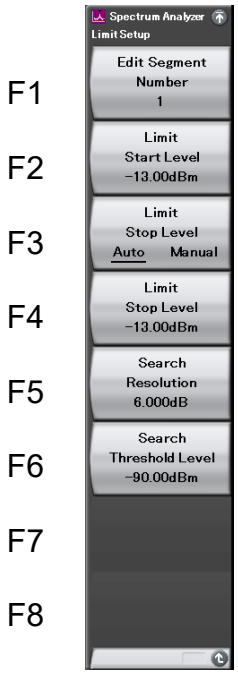

図 7.7-4　Limit Setup ファンクションメニュー

表 7.7-5　Limit Setup ファンクションメニューの説明

メニュー表示	機能
Edit Segment Number	設定対象となるセグメントを選択します。
Limit Start Level	セグメントの開始周波数の絶対レベル上限を設定します。
Limit Stop Level (Auto/Manual)	セグメントの終端周波数の絶対レベル上限の自動／手動設定を切り替えます。Auto のときは，Limit Start Level と同じ値が設定されます。
Limit Stop Level	セグメントの終端周波数の絶対レベル上限を設定します。
Search Resolution	Result Type が Peaks のときのスプリアス検出分解能を設定します。
Search Threshold Level	Result Type が Peaks のときのスプリアス検出しきい値を設定します。

Spurious Emission ファンクションメニューの 2 ページ目で F3 (Time Domain Setup)を押すと，Time Domain Setup ファンクションメニューが表示されます。

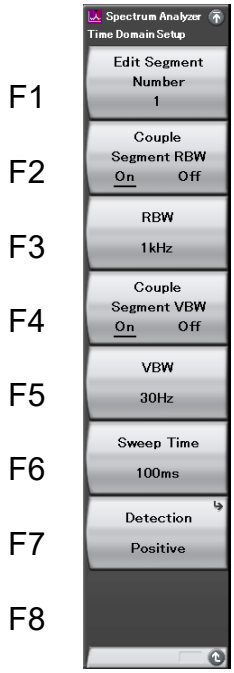

図 7.7-5　Time Domain Setup ファンクションメニュー

表 7.7-6　Time Domain Setup ファンクションメニューの説明

メニュー表示	機能
Edit Segment Number	設定対象となるセグメントを選択します。
Couple Segment RBW (On/Off)	Time Domain 測定時の RBW の共有設定の On/Off を選択します。On のときは，RBW が Segment Setup と同じ値に設定されます。
RBW	Time Domain 測定時の RBW を設定します。
Couple Segment VBW (On/Off)	Time Domain 測定時の VBW の共有設定の On/Off を選択します。On のときは，VBW が Segment Setup と同じ値に設定されます。
VBW	Time Domain 測定時の VBW を設定します。
Sweep Time	Time Domain 測定時の Sweep Time を設定します。
Detection	Time Domain 測定時の検波方式を設定します。スプリアス検索時は Trace ファンクションメニューの Storage Mode が全セグメントに適用されます。 Detection が Positive のときは，最大値（ピークパワー）が測定されます。ストレージが On のときは Time Domain 測定時は Storage Mode が Max Hold となります。 Detection が RMS, Sample のときは，アベレージパワーが測定されます。ストレージが On のときは Time Domain 測定時は Storage Mode が Lin Average となります。

Time Domain Measurement が On のときは図 7.7-6 の Time Domain 測定が行われます。

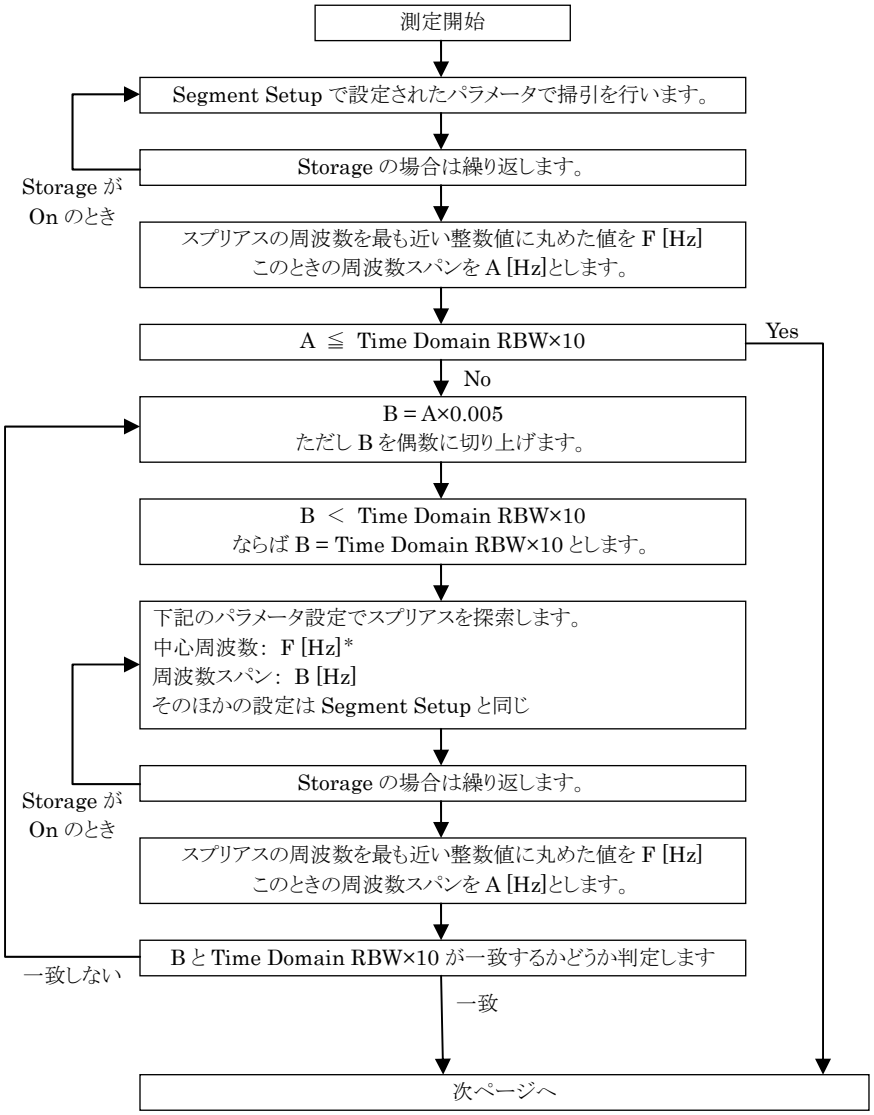

＊：　B の値によっては掃引範囲が対象 Segment の Start Freq, Stop Freq の範囲外となってしまう場合があります。範囲外の掃引を阻止するため，F は以下のように選択されます。

F + (B÷2)が対象 Segment の Stop Freq を超える場合
F = (Stop Freq) – (B÷2)

F – (B÷2)が対象 Segment の Stop Freq を下回る場合
F = (Start Freq) + (B÷2)

図 7.7-6　Time Domain 測定の測定シーケンス

図 7.7-6　Time Domain 測定の測定シーケンス（続き）

メインファンクションメニューで F6 (Trace) を押す，あるいは Trace を押すと，Trace ファンクションメニューが表示されます。

Spurious Emission 測定中は Trace ファンクションメニューが以下のように変更されます。

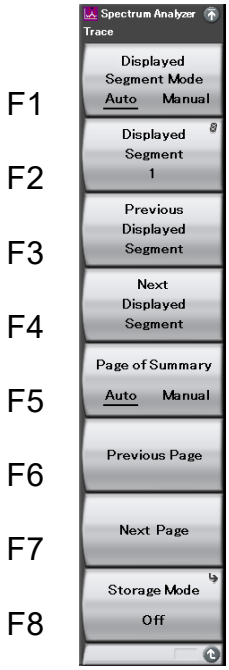

図 7.7-7　Trace ファンクションメニュー

表 7.7-7　Trace ファンクションメニューの説明

メニュー表示	機能
Displayed Segment Mode (Auto/Manual)	トレース表示部に表示するセグメントの自動設定／手動設定を選択します。自動設定時は，掃引中のセグメントが表示されるように，Displayed Segment が自動的に切り替わります。
Displayed Segment	トレース表示部に表示するセグメントを設定します。Off となっているセグメントは設定できません。 測定中かつ Displayed Segment Mode が Auto のときは設定できません。
Previous Displayed Segment	トレース表示部に表示するセグメントを前のセグメントにします。セグメントが On かつ最小値のセグメントを表示中に実行した場合はセグメントが On かつ最大値のセグメントを表示します。 測定中かつ Displayed Segment Mode が Auto のときは設定できません。
Next Displayed Segment	トレース表示部に表示するセグメントを次のセグメントにします。セグメントが On かつ最大値のセグメントを表示中に実行した場合は，セグメントが On かつ最小値のセグメントを表示します。 測定中かつ Displayed Segment Mode が Auto のときは設定できません。
Page of Summary (Auto/Manual)	サマリ表示部のページ番号の自動設定／手動設定を選択します。自動設定時は，Displayed Segment に対応したページが表示されるように，ページ番号が自動的に切り替わります。 Displayed Summary Table が Result のとき有効です。
Previous Page	サマリ表示部を前のページにします。
Next Page	サマリ表示部を次のページにします。
Storage Mode	トレースデータの更新・表示に関する設定をします。詳細は「3.1 ストレージモードの設定」を参照してください。

測定結果の表示項目について説明します。

Result Type が Worst のときは各セグメントで設定した規格線と最も余裕のないスプリアスがサマリ表示部に表示されます。

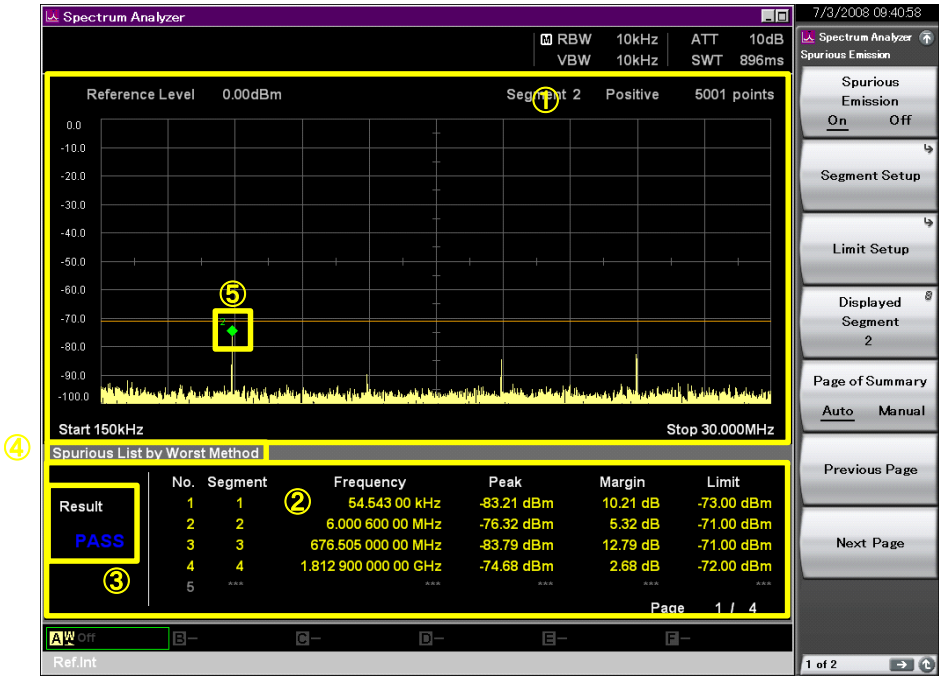

図 7.7-8　Spurious Emission の測定結果の表示項目
（Result Type が Worst のとき）

表 7.7-8　Spurious Emission の測定結果の表示項目の説明

番号	表示	内容
①	―――	トレース表示部です。セグメントごとのトレースが表示されます。
②	No, Segment, Frequency, Peak, Margin, Limit	サマリ表示部です。1 ページにつき 5 つのスプリアスの結果を表示します。それぞれのページで下記の結果を表示します。 No：スプリアス番号 Segment：検出したスプリアスのセグメント番号 Frequency：検出したスプリアスの周波数（Hz） Peak：検出したスプリアスのパワー（dBm） Margin：検出したスプリアスと規格線との差（規格線－測定値）（dB） Limit：スプリアスの周波数での規格線の値（dBm）
③	Result	Pass/Fail 判定結果を表示します。すべてのセグメントの判定結果が Pass の場合は「PASS」が表示されます。それ以外の場合は「FAIL」と表示されます。
④	Peaks/Worst	設定した Result Type が表示されます。
⑤	―――	検出したスプリアスにはマーカが配置されます。マーカの数字は検出したスプリアス番号です。

測定停止中に Time Domain On/Off を On に変更した場合，または Time Domain On/Off が On で測定を行ったあとに Limit 線の変更を行った場合，ディスプレイ部に再測定を促すメッセージ“Please sweep again.”が表示されます。Time Domain 測定が行われた結果を表示したい場合は，再度測定（Single）を行ってください。

注:

Displayed Summary Table が Range のときのサマリ表示部は，各セグメントの周波数範囲，RBW，VBW 設定値を表示します。

Result Type が Peaks のときは，各セグメントで設定した Search Resolution，Search Threshold により検出されたスプリアスがレベル順にサマリ表示部に表示されます。1 セグメントに最大 10 個のスプリアスが表示されます。

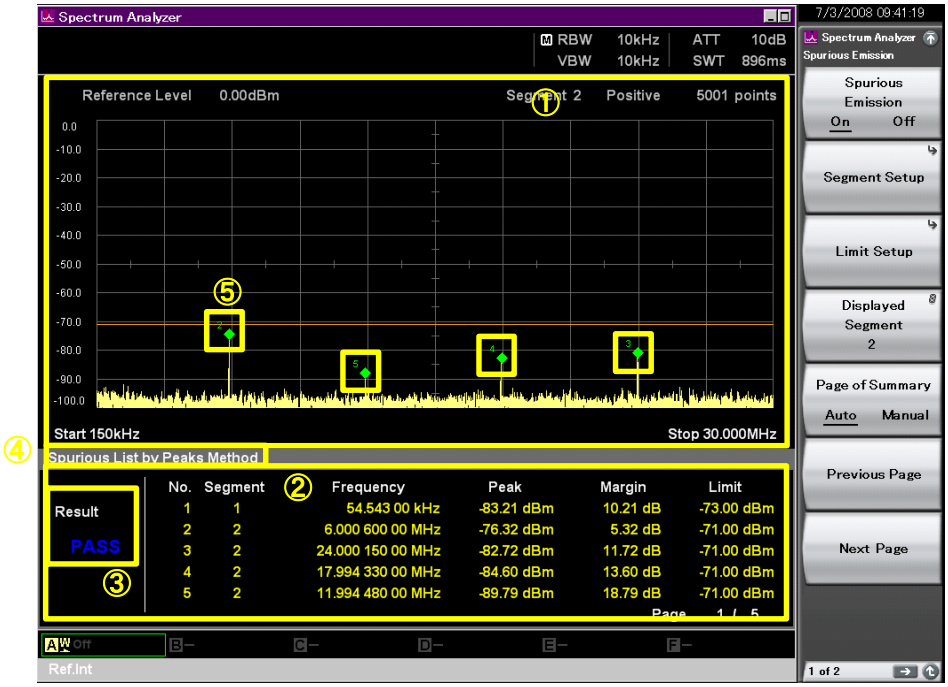

図 7.7-9　Spurious Emission の測定結果の表示項目
（Result Type が Peaks のとき）

表 7.7-9　Spurious Emission 測定結果の表示項目の説明

番号	表示	内容
①	―――	トレース表示部です。セグメントごとのトレースが表示されます。
②	No., Segment, Frequency, Peak, Margin, Limit	サマリ表示部です。1 ページにつき 5 つのスプリアスの結果を表示します。1 セグメントに付き最大 10 個のスプリアスが表示されます。それぞれのページで下記の結果を表示します。 No.:　スプリアス番号 Segment:　検出したスプリアスのセグメント番号 Frequency:　検出したスプリアスの周波数(Hz) Peak:　検出したスプリアスのパワー(dBm) Margin:　検出したスプリアスと規格線との差(規格線－測定値)(dB) Limit:　スプリアスの周波数での規格線の値(dBm)
③	Result	Pass/Fail 判定結果を表示します。すべてのセグメントの判定結果が Pass の場合は[PASS]が表示されます。それ以外の場合は[FAIL]と表示されます。
④	Peaks/Worst	設定した Result Type が表示されます。
⑤	―――	検出したスプリアスにはマーカが配置されます。マーカの数字は検出したスプリアス番号です。スプリアス番号はレベル順に配置されます。

測定停止中に Time Domain On/Off を On に変更した場合，または Time Domain On/Off が On で，測定を行ったあとに Limit 線の変更を行った場合，ディスプレイ部に再測定を促すメッセージ[Please sweep again.]が表示されます。Time Domain 測定が行われた結果を表示したい場合は，再度測定(Single)を行ってください。

注:

Displayed Summary Table が Range のときのサマリ表示部は，各セグメントの周波数範囲，RBW，VBW 設定値を表示します。

7.8　2 信号 3 次歪み

周波数の異なる 2 つの CW 信号(希望波)を入力し,DUT の非線形特性によって希望波近傍に発生する 2 信号 3 次歪みから, TOI(Third Order Intercept)を算出します。Measure ファンクションメニューで ➔ を押して 2 ページ目を表示し, F1 (TOI)を押すと TOI ファンクションメニューが表示されます。

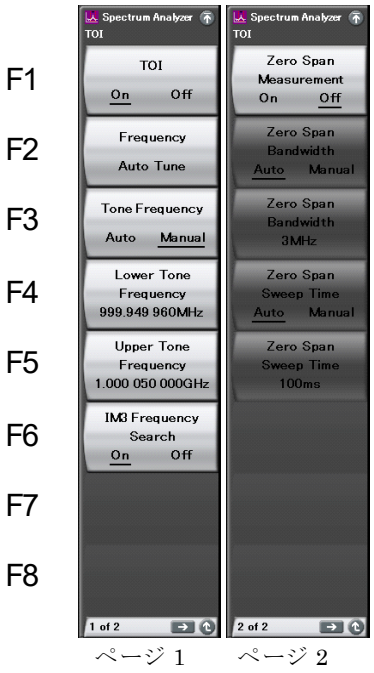

図 7.8-1　TOI ファンクションメニュー

表 7.8-1　TOI ファンクションメニューの説明

ファンクションキー	メニュー表示	機能
ページ 1	TOI	Measure ファンクションメニューで➔を押し，F1 (TOI)を押すと表示されます。
F1	TOI (On/Off)	On に設定した場合，ほかの Measure 機能は Off になります。
F2	Frequency Auto Tune	TOI Frequency Auto Tune を実行します。
F3	Tone Frequency Auto Manual	Tone Frequency を自動検出するかを選択します。
F4	Lower Tone Frequency <Hz>	Lower Tone の周波数を設定します。 Tone Frequency = Auto 時は設定出来ません。
F5	Upper Tone Frequency <Hz>	Upper Tone の周波数を設定します。 Tone Frequency = Auto 時は設定出来ません。
F6	IM3 Frequency Search On/Off	2 つの CW 信号から算出した IM3 が発生する周波数の近傍でピークサーチを行い，ピークが検出された周波数を IM3 の周波数とする機能の On/Off を選択します。ピークサーチはスパン，RBW およびトレースポイントによる誤差が生じうる周波数範囲で行われます。
ページ 2	TOI	Measure ファンクションメニューで➔を押し，F1 (TOI)，➔を順に押すと表示されます。
F1	Zero Span Measurement On/Off	Zero Span Measurement を実施するかを選択します。
F2	Zero Span Bandwidth Auto/Manual	Zero Span Measurement の RBW を，自動設定または手動設定に切り替えます。Zero Span Measurement = Off 時は設定出来ません。 Zero Span Bandwidth を直接手動で変更した場合は，Manual に切り替わります。
F3	Zero Span Bandwidth <Bandwidth>	Zero Span Measurement の RBW を設定します。Zero Span Measurement = Off 時は設定できません。
F4	Zero Span Sweep Time Auto/Manual	Zero Span Measurement の Sweep Time を自動設定または手動設定に切り替えます。Zero Span Measurement = Off 時は設定出来ません。 Zero Span Sweep Time を直接手動で変更した場合は，Manual に切り替わります。
F5	Zero Span Sweep Time <time>	Zero Span Measurement の Sweep Time を設定します。Zero Span Measurement = Off 時は設定出来ません。

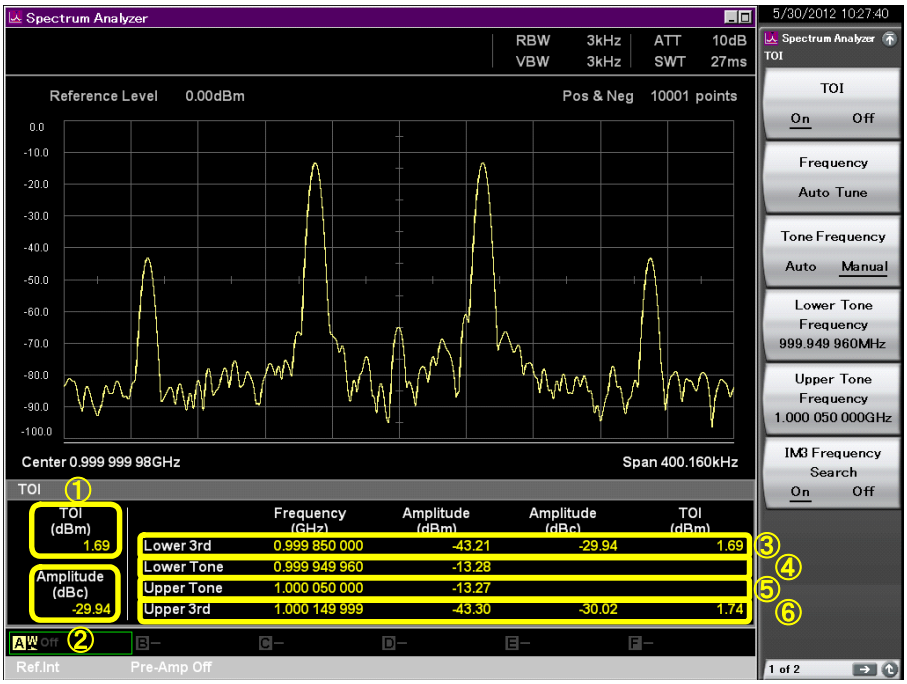

図 7.8-2　測定結果の表示項目

表 7.8-2　測定結果の表示項目の説明

番号	表示	内容
①	TOI（dBm）	算出した TOI を表示します。2 つ算出(Lower, Upper)したもののうち，ワースト値(値の低い方)を表示します。
②	Amplitude (dBc)	希望波に対する 2 信号 3 次歪みのレベル比を表示します。2 つ算出(Lower, Upper)したもののうち，ワースト値(値の大きい)を表示します。
③	Lower 3rd	希望波の下側周波数に発生する 2 信号 3 次歪み。 周波数，信号レベル，希望波とのレベル比，また算出した TOI を表示します。
④	Lower Tone	下側周波数成分を持つ希望波。 周波数，信号レベルを表示します。
⑤	Upper Tone	上側周波数成分を持つ希望波。 周波数，信号レベルを表示します。
⑥	Upper 3rd	希望波の上側周波数に発生する 2 信号 3 次歪み。 周波数，信号レベル，希望波とのレベル比，また算出した TOI を表示します。

第8章　その他の機能

この章では，本アプリケーションのその他の機能について説明します。

8.1　その他の機能の選択 8-2
8.2　タイトルの設定 8-3
8.3　ウォームアップメッセージの消去 8-4
8.4　Uncal メッセージの設定 8-5
8.5　内部基準周波数信号の調整 8-6
8.6　基準周波数信号の入力ソース 8-7
8.7　Pre-Amp 表示 8-8

8.1　その他の機能の選択

メインファンクションメニューのページ 2 で F8 (Accessory)を押すと，Accessory ファンクションメニューが表示されます。

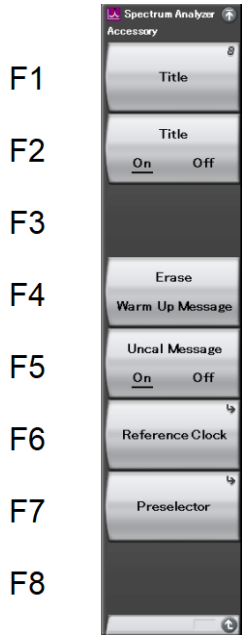

図 8.1-1　Accessory ファンクションメニュー

表 8.1-1　Accessory ファンクションメニューの説明

メニュー表示	機能
Title	タイトル文字列を設定します。 8.2　タイトルの設定
Title (On/Off)	タイトル文字列表示の On/Off を設定します。 8.2　タイトルの設定
Erase Warm Up Message	ウォームアップメッセージの表示を消去します。 8.3　ウォームアップメッセージの消去
Uncal Message (On/Off)	Uncal メッセージ表示の On/Off を設定します。 8.4　Uncal メッセージの設定
Reference Clock	内部基準周波数信号を調整します。 8.5　内部基準周波数信号の調整
Preselector	プリセレクタについて設定します。 6.1　プリセレクタチューニング機能

8.2　タイトルの設定

画面に最大 32 文字までのタイトルを表示することができます（ファンクションメニュー上部の表示は，最大 17 文字です）。

＜手順＞

1. メインファンクションメニューのページ 2 で F8 (Accessory)を押します。
2. F1 (Title)を押すと文字列の入力画面が表示されます。ロータリノブを使用して文字を選択し，Enter で入力します。入力が完了したら，F7 (Set)を押します。
3. F2 (Title)を押して，Off を選択すると，タイトル表示は Off になります。

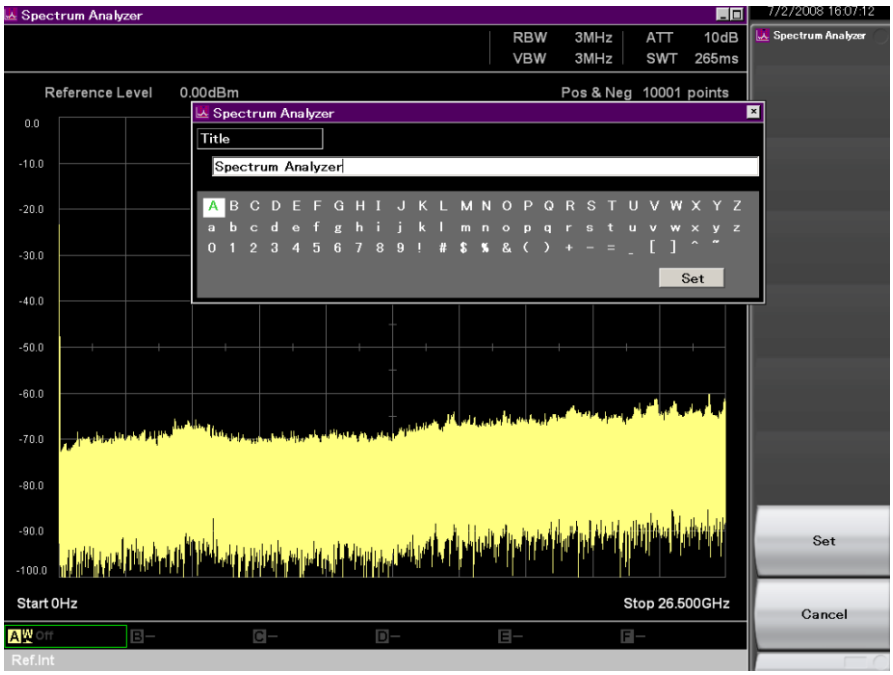

図 8.2-1　タイトルの設定

8

その他の機能

8.3　ウォームアップメッセージの消去

電源投入後に，レベルと周波数が安定していないことを示すウォームアップメッセージ（Warm Up）を消去することができます。

＜手順＞

1. メインファンクションメニューのページ 2 で F8（Accessory）を押します。
2. F4（Erase Warm Up Message）を押して，ウォームアップメッセージを消去します。

8.4　Uncal メッセージの設定

本アプリケーションは測定値が保証できない設定で測定を実行することもできます。その場合，画面上に Uncal メッセージが表示されます。Uncal メッセージの表示は On/Off を設定することができます。

＜手順＞

1. メインファンクションメニューのページ 2 で F8 (Accessory)を押します。
2. F5 (Uncal Message)を押して，On または Off に設定します。

8.5　内部基準周波数信号の調整

Accessory ファンクションメニューの F6 (Reference Clock)を押すと，Reference Clock ファンクションメニューが表示されます。

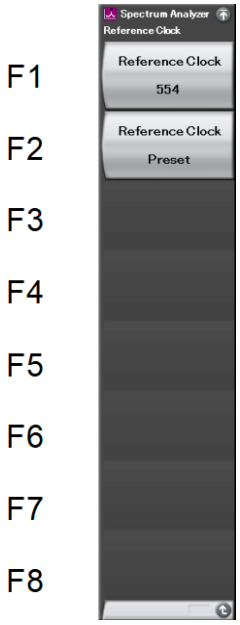

図 8.5-1　Reference Clock ファンクションメニュー

表 8.5-1　Reference Clock ファンクションメニューの説明

ファンクションキー	メニュー表示	機能
F1	Reference Clock	内部基準周波数信号の周波数を調整します。
F2	Reference Clock Preset	Reference Clock を工場出荷時の値に戻します。

操作例：基準クロックを調整する

＜手順＞

1. メインファンクションメニューのページ 1 で F8 (Accessory)を押します。
2. F6 (Reference Clock)を押したあと，F1 (Reference Clock)を押して，内部基準周波数信号の周波数を調整します。

8.6　基準周波数信号の入力ソース

使用している基準周波数信号は画面上に表示されます。

Ref.Int　：内部基準周波数信号を使用しています。

Ref.Int Unlock　：内部基準周波数信号が外れています。内部ハードウェアが故障しているおそれがあります。

Ref.Ext　：外部基準周波数信号を使用しています。

Ref.Ext Unlock　：外部基準周波数信号と同期が取れていません。Ref Input コネクタに入力されている基準信号を確認してください。

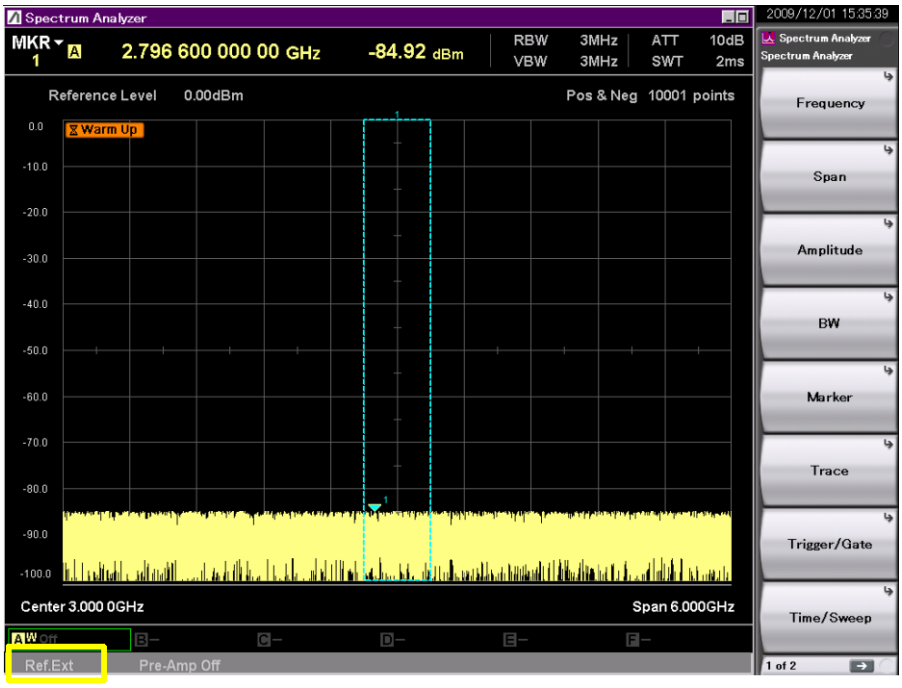

図 8.6-1　基準周波数信号の入力ソース

8

その他の機能

8.7　Pre-Amp 表示

オプション 008 6 GHz プリアンプが実装されている場合，プリアンプの On/Off が画面左下に表示されます。

☞ 2.4.6 プリアンプ

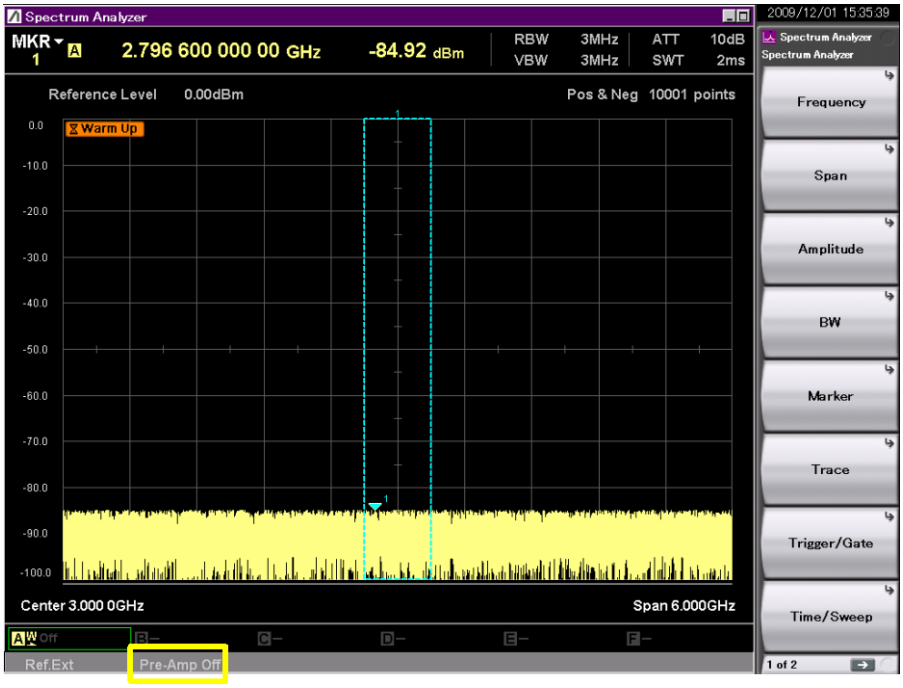

図 8.7-1　Pre-Amp On/Off 表示

表 A-1　エラーメッセージ

メッセージ	内容
Out of range.	設定可能な範囲を超えています。
Not available in Frequency Domain.	周波数ドメインの表示中は無効な操作です。
Not available in Time Domain.	タイムドメインの表示中は無効な操作です。
Not available if not Pre-selector lower frequency expansion option.	プリセレクタ下限周波数拡張オプションが存在しない状態では無効な操作です。
Not available in frequency band without the Preselector pass frequency band	プリセレクタバンド以外のバンドが使用されている状態では無効な操作です。
Not available if Frequency Span is set over multiple band.	Frequency Span が複数の周波数バンドにまたがる状態では無効な操作です。
Not available in Frequency Span > 500 MHz.	Frequency Span が 500 MHz を超える状態では無効な操作です。
Not available in Time Span < 5 ms.	Time Span が 5 ms 未満の状態では無効な操作です。
Cannot Set under 4 dB with Step Key and Encoder. Please Input with Numeric Key.	4 dB 未満のアッテネータ設定は，数値キーでの入力が必要です。
Not available in Lin Scale.	Scale Mode が Linear の状態では無効な操作です。
Signal not found	信号が入力されていません。
Search error	サーチエラーです。
Marker value is invalid.	マーカ値が無効です。
Not available in Marker Off.	Marker が Off の状態では無効な操作です。
Not available in Power Marker Off.	Power Marker が Off の状態では無効な操作です。
Not available in Power Marker On.	Power Marker が On の状態では無効な操作です。
Not available if not Delta Marker.	Delta Marker が On ではない状態では無効な操作です。
Not available in Trace Blank.	アクティブトレースが Blank の状態では無効な操作です。
Not available in RMS detection.	Detection が RMS の状態では無効な操作です。
Not available in Trigger On.	Trigger が On の状態では無効な操作です。
Not available in Gate On.	Gate が On の状態では無効な操作です。
Not available in Gate Off.	Gate が Off の状態では無効な操作です。
Not available if not Trigger/Gate On	Trigger/Gate が On ではない状態では無効な操作です。
Not available if not Pre-Amplifier option.	オプション 008「6 GHz プリアンプ」が存在しない状態では無効な操作です。

表 A-1　エラーメッセージ（続き）

メッセージ	内容
Not available in SG Marker Trigger.	SG Marker Trigger を使用している状態では無効な操作です。
Not available if not Vector Signal Generator option.	オプション 020 が存在しない状態では無効な操作です。
Standard Parameter isn't found.	Standard Parameter が見つかりません。
Not available when Standard is set to OFF.	Standard が OFF の状態では無効な操作です。
Not available if not Nyquist or Root Nyquist filter.	ナイキストフィルタまたはルートナイキストフィルタが選択されていない状態では無効な操作です。
Cal suspended	校正が中断されました。
Invalid Button	無効なキー操作です。
Not available because model name is not match.	モデル名が一致しないため，無効な操作です。
Not available because option configuration is not match	オプション構成が一致しないため，無効な操作です。
Not available if not input save file name.	Save ファイル名を入力していない状態では，無効な操作です。
Not available over the maximum number of characters.	文字数の上限値を超えたため，無効な操作です。
Hardware setting failure.	ハードウェアの設定に失敗しました。
Media not found.	メディアが見つかりません。
Format error.	メディアがフォーマットされていません。
File not found.	ファイルが見つかりません。
File Open error.	File Open に失敗しました。
File Close error.	File Close に失敗しました。
Read/Write error.	Read/Write に失敗しました。
Disk is full.	ディスクの空き容量が不足しています。
Not available in already saved the maximum number of files in the selected device.	指定したデバイスに最大数のファイルが保存されている状態では無効な操作です。
Undefined command header	未定義のコマンドです。
Invalid numeric data	数値パラメータが不正です。

表 A-1　エラーメッセージ（続き）

メッセージ	内容
Not available in ACP and Burst Average Power Off.	ACP および Burst Average Power が Off の状態では無効な操作です。
Not available in ACP Off.	ACP が Off の状態では無効な操作です。
Not available in Burst Average Power Off.	Burst Average Power が Off の状態では無効な操作です。
Not available in Standard Off.	Standard が Off の状態では無効な操作です。
Not available when unsupported Standard Parameter is selected.	Standard Parameter がノイズキャンセルに未対応です。
Not available when Load Standard Parameter isn't executed.	Load Standard Parameter の実行が必要です。
Not available while executing Noise Measurement.	ノイズ測定中は変更不可です。
Not available when ACP Reference is set to Span Total.	ACP Reference が Span Total です。
Not available if not Reference Mode Fix.	Reference Mode が Fix の状態では無効な操作です。
Not available if not Reference Mode Channel.	Reference Mode が Channel の状態では無効な操作です。
Not available in Spectrum Emission Mask On.	Spectrum Emission Mask が On の状態では無効な操作です。
Not available in Spectrum Emission Mask Off.	Spectrum Emission Mask が Off の状態では無効な操作です。
Not available if not RMS detection.	Detection が RMS の状態では無効な操作です。
Not available in Measure On.	Measure が On の状態では無効な操作です。
The active marker cannot be set.	アクティブマーカは設定できません。
The target marker cannot be set.	ターゲットマーカは設定できません。
Not available when Marker Result isn't set to Peak.	Marker Result が Peak の状態以外では無効な操作です。
Not available in Couple Ref&ATT On.	Couple Ref&ATT が On の状態では無効な操作です。
Not available in Segment Off.	Segment が Off の状態では無効な操作です。
Cannot set all segments to Off at the same time.	すべての Segment を同時に Off には設定できません。
Not available in Spurious Emission On.	Spurious Emission が On の状態では無効な操作です。
No Parameter.	パラメータがありません。
Not available in Time Domain Measurement On.	Time Domain Measurement が On の状態では無効な操作です。
Not available during measurement, and Displayed Segment Mode is set to Auto.	測定中，かつ Displayed Segment Mode が Auto の状態では無効な操作です。
Available in remote control state with Spurious Emission paused.	リモート状態，かつ Spurious Emission が一時停止中のときに使用できます。

表 A-1　エラーメッセージ（続き）

メッセージ	内容
Not available when Gate View is set to Off.	Gate View が Off の状態では無効な操作です。
Not available when all traces are set to Blank.	すべてのトレースが Blank の状態では無効な操作です。
Not available when Spurious Emission is set to Off.	Spurious Emission が Off の状態では無効な操作です。
Not available when Spectrum Emission Mask is set to On and Gate View is set to Off.	Spectrum Emission Mask が On かつ Gate View が Off の状態では無効な操作です。
Not available when Spurious Emission is set to On and Gate View is set to Off.	Spurious Emission が On かつ Gate View が Off の状態では無効な操作です。
Not available in Freq. Count Off.	Frequency Counter が Off の状態では無効な操作です。
Invalid character	無効な文字です。

Frequency		
Center	3 GHz	(MS2690A)
	6.75 GHz	(MS2691A)
	13.25 GHz	(MS2692A)
Start	0 Hz	
Stop	6 GHz	(MS2690A)
	13.5 GHz	(MS2691A)
	26.5 GHz	(MS2692A)
Offset	Off, 0 Hz	
Step Size	1 GHz	
Span		
Span	6 GHz	(MS2690A)
	13.5 GHz	(MS2691A)
	26.5 GHz	(MS2692A)
Couple Time/Frequency Domain		
	On	
Frequency Band Mode	Normal	
Amplitude		
Reference Level	0 dBm	
Attenuator	Auto, 10 dB	
Log Scale Unit	dBm	
Scale	Log	
Log Scale Division	10 dB/Div	
Log Scale Line	10	
Offset	Off, 0 dB	
Pre-amp	Off	
BW		
RBW	Auto, 3 MHz	
VBW	Auto, 3 MHz	
VBW Mode	Power	
Marker		
Active Marker	Marker1	
Marker Mode	Normal	
Zone Width	600 MHz	(MS2690A)
	1.35 GHz	(MS2691A)
	2.65 GHz	(MS2692A)
Marker Trace	A	
Marker Result	Peak	
Marker Type	Zone	
Couple Zone	On	
Spot Line	On	
Marker List	Off	
Frequency Count	Off	

Gate Time	100 ms
Relative to	Marker2 (Active Marker が 1 のとき)
	Marker3 (Active Marker が 2 のとき)
	Marker4 (Active Marker が 3 のとき)
	Marker5 (Active Marker が 4 のとき)
	Marker6 (Active Marker が 5 のとき)
	Marker7 (Active Marker が 6 のとき)
	Marker8 (Active Marker が 7 のとき)
	Marker9 (Active Marker が 8 のとき)
	Marker10 (Active Marker が 9 のとき)
	Marker1 (Active Marker が 10 のとき)
Trace	
Trace-A Trace Type	Write
Trace-B Trace Type	Blank
Trace-C Trace Type	Blank
Trace-D Trace Type	Blank
Trace-E Trace Type	Blank
Trace-F Trace Type	Blank
Trace-A Storage Mode	Off
Trace-B Storage Mode	Off
Trace-C Storage Mode	Off
Trace-D Storage Mode	Off
Trace-E Storage Mode	Off
Trace-F Storage Mode	Off
Storage Count	10
Limits	
Limit 1 to 6	
Type	On
Limit Display	Off
Limit Test	Off
Margin	Off
Margin Value	0 dB
Edit	
Point	1
Frequency	Center Frequency
Connected to Previous Pt	On
Previous Pt Level Offset	0.0 dB
Envelope	
Points	41
Offset	3.0 dB
Shape	Square
Limit Line Type (Frequency)	Rel
Limit Line Type (Amplitude)	Abs

Mirror Limit	Off
Detection	Pos & Neg
Trigger/Gate	
Trigger Switch	Off
Trigger Source	Video
Trigger Slope	Rise
Trigger Level (Video)	–40 dBm
Trigger Level (Wide IF Video)	–20 dBm
Trigger Delay	0 s
Gate Sweep	Off
Gate View	Off
Gate Delay	0 s
Gate Length	1.0 ms
Gate Source	External
Gate Slope	Rise
Gate Level (Wide IF Video)	–20 dBm

Gate View Setting

Sweep Time	100 ms	
RBW	Auto, 3 MHz	
VBW	Auto, 3 MHz	
Detection	Pos & Neg	
Trace Point	10001	
Gate View Frequency		
	Auto, 3 GHz	(MS2690A)
	Auto, 6.75 GHz	(MS2691A)
	Auto, 13.25 GHz	(MS2692A)
Reference Level	0 dBm	
Attenuator	Auto, 10 dB	
Pre-Amp	Off	

Time/Sweep

Sweep Time (Frequency Domain)		
	Auto, 10 ms	(MS2690A)
	Auto, 135 ms	(MS2691A)
	Auto, 265 ms	(MS2692A)
Sweep Time (Time Domain)	100 ms	
Auto Sweep Time Select	Normal	
Trace Point	10001	

Peak Search

Resolution	2 dB
Threshold	Off, Above
Threshold Level	–50 dBm
Search Peaks Number	10

Save on Event

Save on Event	Off
Event Type	Limit Fail
Save then Stop	Off
File Name	LIM

Accessory

Title	On, “Spectrum Analyzer”
Uncal Message	On
Reference Clock	出荷時に調整された値となります。
Preselector	出荷時に調整された値となります。

Measure

ACP

On/Off	Off
Reference	Both Sides of Carriers
Offset Ch BW	3.84 MHz
Carrier BW	3.84 MHz
In Band Center	Center Frequency
Carrier Spacing	5 MHz
Offset-1	On, 5 MHz
Offset-2	On, 10 MHz
Offset-3	Off, 15 MHz
In Band Filter Type	Root Nyquist
Offset Ch Filter Type	Root Nyquist
In Band Roll-off Factor	0.22
Offset Ch Roll-off Factor	0.22
Noise Cancel	Off
Result Type	Offset
Carrier Number	1

Burst Average Power

On/Off	Off
Start Time	0 s
Stop Time	100 ms
Noise Cancel	Off

Channel Power

On/Off	Off
Channel Center	Center Frequency
Channel Width	3.84 MHz
Filter Type	Root Nyquist
Roll-off Factor	0.22

OBW

On/Off	Off
Method	N%
N% of Ratio	99%
XdB Value	25 dB

Spectrum Emission Mask

On/Off	Off
Limit Side	Both
Result Type	Peak
Reference Mode	Channel
Reference Power	0 dBm
Channel BW	3.84 MHz
Attenuator	Auto, 10 dB
RBW Auto/Manual	Manual, 30 kHz
VBW Auto/Manual	Auto, 30 kHz
VBW Mode	Power
Sweep Time	Auto, 19 ms
Auto Sweep Time Select	Normal
Detection	RMS
Trace Point	1001
Filter Type	Root Nyquist
Roll-off Factor	0.22
Couple Ref&ATT	On
Edit Offset Number	1

Offset-1

Offset	On
Start Freq	2.515 MHz
Stop Freq	2.715 MHz
Reference Level	Auto, 0 dBm
Attenuator	Auto, 10 dB
RBW	Manual, 30 kHz
VBW	Auto, 30 kHz
VBW Mode	Power
Sweep Time	Auto, 2 ms
Auto Sweep Time Select	Normal
Detection	RMS
Trace Point	1001
Integrate BW	Auto, 30 kHz
ABS1 Start Level	–12.5 dBm
ABS1 Stop Level	–12.5 dBm
REL Start Level	0 dB
REL Stop Level	0 dB
ABS2 Start Level	–15 dBm
ABS2 Stop Level	–15 dBm
Fail Logic	ABS1

Offset-2

Offset	On
Start Freq	2.715 MHz
Stop Freq	3.515 MHz
Reference Level	Auto, 0 dBm
Attenuator	Auto, 10 dB
RBW	Manual, 30 kHz
VBW	Auto, 30 kHz
VBW Mode	Power
Sweep Time	Auto, 4 ms
Auto Sweep Time Select	Normal
Detection	RMS
Trace Point	1001
Integrate BW	Auto, 30 kHz
ABS1 Start Level	–12.5 dBm
ABS1 Stop Level	–24.5 dBm
REL Start Level	0 dB
REL Stop Level	0 dB
ABS2 Start Level	–15 dBm
ABS2 Stop Level	–15 dBm
Fail Logic	ABS1

Offset-3

Offset	On
Start Freq	3.515 MHz
Stop Freq	4 MHz
Reference Level	Auto, 0 dBm
Attenuator	Auto, 10 dB
RBW	Manual, 30 kHz
VBW	Auto, 30 kHz
VBW Mode	Power
Sweep Time	Auto, 2 ms
Auto Sweep Time Select	Normal
Detection	RMS
Trace Point	1001
Integrate BW	Auto, 30 kHz
ABS1 Start Level	–24.5 dBm
ABS1 Stop Level	–24.5 dBm
REL Start Level	0 dB
REL Stop Level	0 dB
ABS2 Start Level	–15 dBm
ABS2 Stop Level	–15 dBm
Fail Logic	ABS1

Offset-4

Offset	On
Start Freq	4 MHz
Stop Freq	8 MHz
Reference Level	Auto, 0 dBm
Attenuator	Auto, 10 dB
RBW	Manual, 1 MHz
VBW	Auto, 1 MHz
VBW Mode	Power
Sweep Time	Auto, 2 ms
Auto Sweep Time Select	Normal
Detection	RMS
Trace Point	1001
Integrate BW	Auto, 1 MHz
ABS1 Start Level	–11.5 dBm
ABS1 Stop Level	–11.5 dBm
REL Start Level	0 dB
REL Stop Level	0 dB
ABS2 Start Level	–13 dBm
ABS2 Stop Level	–13 dBm
Fail Logic	ABS1

Offset-5

Offset	On
Start Freq	8 MHz
Stop Freq	12.5 MHz
Reference Level	Auto, 0 dBm
Attenuator	Auto, 10 dB
RBW	Manual, 1 MHz
VBW	Auto, 1 MHz
VBW Mode	Power
Sweep Time	Auto, 2 ms
Auto Sweep Time Select	Normal
Detection	RMS
Trace Point	1001
Integrate BW	Auto, 1 MHz
ABS1 Start Level	–11.5 dBm
ABS1 Stop Level	–11.5 dBm
REL Start Level	0 dB
REL Stop Level	0 dB
ABS2 Start Level	–13 dBm
ABS2 Stop Level	–13 dBm
Fail Logic	ABS1

Offset-6

Offset	Off
Start Freq	12.5 MHz
Stop Freq	15 MHz
Reference Level	Auto, 0 dBm
Attenuator	Auto, 10 dB
RBW	Manual, 1 MHz
VBW	Auto, 1 MHz
VBW Mode	Power
Sweep Time	Auto, 2 ms
Auto Sweep Time Select	Normal
Detection	RMS
Trace Point	1001
Integrate BW	Auto, 1 MHz
ABS1 Start Level	–11.5 dBm
ABS1 Stop Level	–11.5 dBm
REL Start Level	0 dB
REL Stop Level	0 dB
ABS2 Start Level	–13 dBm
ABS2 Stop Level	–13 dBm
Fail Logic	Off

Spurious Emission

On/Off	Off
Displayed Segment	1
Page of Summary	Auto
Result Type	Worst
Time Domain Measurement	Off
Fail Stop	Off
Displayed Segment Mode	Auto
Displayed Summary Table	Result

Segment-1

Segment Setup

Segment	On
Start Freq	9 kHz
Stop Freq	150 kHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 kHz
VBW	Auto, 1 kHz
Sweep Time	Auto
Trace Point	1001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On, 1 kHz
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-2

Segment Setup

Segment	On
Start Freq	150 kHz
Stop Freq	30 MHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 10 kHz
VBW	Auto, 10 kHz
Sweep Time	Auto
Trace Point	5001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On, 10 kHz
Couple Segment VBW	On, 10 kHz
Sweep Time	100 ms
Detection	RMS

Segment-3

Segment Setup

Segment	On
Start Freq	30 MHz
Stop Freq	1 GHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 100 kHz
VBW	Auto, 100 kHz
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On, 100 kHz
Couple Segment VBW	On, 100 kHz
Sweep Time	100 ms
Detection	RMS

Segment-4

Segment Setup

Segment	On
Start Freq	1 GHz
Stop Freq	2 GHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
VBW	Auto, 1 MHz
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On, 1 MHz
Couple Segment VBW	On, 1 MHz
Sweep Time	100 ms
Detection	RMS

Segment-5

Segment Setup

Segment	On
Start Freq	2 GHz
Stop Freq	3 GHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual 1 MHz
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-6

Segment Setup

Segment	On
Start Freq	3 GHz
Stop Freq	4 GHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual 1 MHz
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-7

Segment Setup

Segment	On
Start Freq	4 GHz
Stop Freq	5 GHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual 1 MHz
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-8

Segment Setup

Segment	On
Start Freq	5 GHz
Stop Freq	6 GHz
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual 1 MHz
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-9

Segment Setup

Segment	On
	(MS2690A のときは Off)
Start Freq	6 GHz
	(MS2690A のときは 1 GHz)
Stop Freq	7 GHz
	(MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
	(MS2690A のときは Auto)
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-10

Segment Setup

Segment	On
	(MS2690A のときは Off)
Start Freq	7 GHz
	(MS2690A のときは 1 GHz)
Stop Freq	8 GHz
	(MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
	(MS2690A のときは Auto)
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-11

Segment Setup

Segment	On
	(MS2690A のときは Off)
Start Freq	8 GHz
	(MS2690A のときは 1 GHz)
Stop Freq	9 GHz
	(MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
	(MS2690A のときは Auto)
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-12

Segment Setup

Segment	On
	(MS2690A のときは Off)
Start Freq	9 GHz
	(MS2690A のときは 1 GHz)
Stop Freq	10 GHz
	(MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
	(MS2690A のときは Auto)
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-13

Segment Setup

Segment	On
	(MS2690A のときは Off)
Start Freq	10 GHz
	(MS2690A のときは 1 GHz)
Stop Freq	11 GHz
	(MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
	(MS2690A のときは Auto)
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-14

Segment Setup

Segment	On
	(MS2690A のときは Off)
Start Freq	11 GHz
	(MS2690A のときは 1 GHz)
Stop Freq	12 GHz
	(MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
	(MS2690A のときは Auto)
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-15

Segment Setup

Segment	On
	(MS2690A のときは Off)
Start Freq	12 GHz
	(MS2690A のときは 1 GHz)
Stop Freq	12.75 GHz
	(MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Manual, 1 MHz
	(MS2690A のときは Auto)
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

Segment-16～20

Segment Setup

Segment	Off
Start Freq	1 GHz
Stop Freq	12.75 GHz (MS2690A のときは 6 GHz)
Reference Level	0 dBm
Attenuator	Auto, 10 dB
Detection	Positive
RBW	Auto
VBW	Auto
Sweep Time	Auto
Trace Point	10001
Couple Storage Count	On
Storage Count	10
Pause before Sweep	Off
Correction	Common
Preamp	Off

Limit Setup

Start Level	–13 dBm
Stop Level	Auto, –13 dBm
Search Resolution	6 dB
Threshold Level	–90 dBm

Time Domain Setup

Couple Segment RBW	On
Couple Segment VBW	On
Sweep Time	100 ms
Detection	RMS

付録 C　Standard パラメーター一覧

Standard 機能により設定されるパラメータは以下のとおりです。

C.1 ACP C-3
W-CDMA C-3
Mobile WiMAX C-8
LTE C-10
DSRC C-54
TD-SCDMA C-56
CDMA2000 ....C-68
EV-DO C-69
TELEC-T403 ....C-70
TELEC-T405 ....C-74
BPSK C-76
GFSK C-77
APCO C-86
NXDN C-90
5GNR TDD DL (sub-6G)_Conducted C-92
5GNR TDD DL (sub-6G)_Radiated C-99
C.2 Burst Average Power C-100
W-CDMA/Mobile WiMAX/LTE/DSRC C-100
TD-SCDMA/LTE TDD/CDMA2000/EV-DO C-101
C.3 Channel Power C-102
W-CDMA C-102
Mobile WiMAX C-103
LTE C-104
LTE TDD C-108
DSRC/TD-SCDMA C-112
XG-PHS C-113
CDMA2000/EV-DO C-114
ISDB-Tmm/ISDB-T C-115
ISDB-T_{SB} C-116
5GNR TDD DL (sub-6G)_Conducted C-117
5GNR TDD DL (sub-6G)_Radiated C-119
C.4 OBW C-120
W-CDMA/Mobile WiMAX C-120
LTE C-121
LTE TDD C-123
DSRC C-125
TD-SCDMA/XG-PHS/CDMA2000/EV-DO C-126
ISDB-Tmm/ISDB-T/ISDB-T_{SB} C-128
TELEC-T401/TELEC-T403 ....C-129
TELEC-T405 ....C-131
ETSI EN 301 893 ....C-132
5GNR TDD DL (sub-6G)_Conducted C-134
5GNR TDD DL (sub-6G)_Radiated C-136
C.5 SEM C-137

W-CDMA C-137
Mobile WiMAX.....C-164
LTE/LTE TDD Downlink C-170
LTE/LTE TDD Uplink.....C-218
TD-SCDMA C-270
XG-PHS.....C-300
CDMA2000.....C-303
EV-DO C-339
ISDB-Tmm.....C-352
ISDB-T.....C-359
ISDB-T_{SB}.....C-361
SEM 802.11a.....C-364
SEM 802.11b.....C-366
SEM 802.11g.....C-368
SEM 802.11j.....C-374
SEM 802.11p.....C-376
SEM 802.11n.....C-378
SEM 802.11ac.....C-386
ETSI EN 301 893 .....C-394
O-QPSK C-406
BPSK.....C-407
GFSK.....C-408
APCO P25.....C-414
Microlink ETSI CS: 7MHz.....C-418
Microlink ETSI CS: 14MHz.....C-436
Microlink ETSI CS: 28MHz.....C-454
Microlink ETSI CS: 56MHz.....C-490
TELEC-T403 .....C-514
NXDN C-551
5GNR TDD DL (sub-6G)_Conducted.....C-555
5GNR TDD DL (sub-6G)_Radiated.....C-629
C.6 Spurious Emission C-649
TELEC-T401 .....C-649
TELEC-T402 .....C-652
TELEC-T403 .....C-654
TELEC-T405 .....C-672
FCC 15 407 .....C-689
ETSI EN 301 893 .....C-693
ETSI EN 300 328 .....C-697

C.1 ACP

W-CDMA

表C.1-1 ACP 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
W-CDMA Uplink	Frequency Span	25 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	3.84 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Root Nyquist
	In Band Roll-off Factor	0.22
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	3.84 MHz
	Offset Ch Filter Type	Root Nyquist
	Offset Ch Roll-off Factor	0.22

表C.1-1　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (Single Carrier)	Frequency Span	25 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	3.84 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Root Nyquist
	In Band Roll-off Factor	0.22
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	3.84 MHz
	Offset Ch Filter Type	Root Nyquist
	Offset Ch Roll-off Factor	0.22

表C.1-1　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (2 Carriers)	Frequency Span	30 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Both Sides of Carriers
	Carrier Number	2
	Carrier BW	3.84 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Root Nyquist
	In Band Roll-off Factor	0.22
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	3.84 MHz
	Offset Ch Filter Type	Root Nyquist
	Offset Ch Roll-off Factor	0.22

表C.1-1　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (3 Carriers)	Frequency Span	35 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Both Sides of Carriers
	Carrier Number	3
	Carrier BW	3.84 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Root Nyquist
	In Band Roll-off Factor	0.22
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-1　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (4 Carriers)	Frequency Span	40 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Both Sides of Carriers
	Carrier Number	4
	Carrier BW	3.84 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Root Nyquist
	In Band Roll-off Factor	0.22
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

Mobile WiMAX

表C.1-2　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
Mobile WiMAX DL / UL 10MHz BW	Frequency Span	50 MHz
	RBW	30 kHz
	VBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	9.5 MHz
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	10 MHz
	Offset Freq-2	20 MHz
	Offset Freq-3	30 MHz
	Ch BW	9.5 MHz
	Offset Ch Filter Type	Rect

表C.1-2　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Mobile WiMAX DL / UL 5MHz BW	Frequency Span	25 MHz
	RBW	30 kHz
	VBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	4.75 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	4.75 MHz
	Offset Ch Filter Type	Rect

LTE

表C.1-3　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
LTE Uplink/Downlink 1.4MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	21.4 MHz
	RBW	10 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.095 MHz (DL) 1.08 MHz (UL)
	Carrier Spacing	1.4 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	3.2 MHz
	Offset Freq-2	8.2 MHz
	Offset Freq-3	13.2 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 1.4MHz BW (UTRA 1.6MHz)	Trace Points	1001
	Span Frequency	7.8 MHz
	RBW	10 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.095 MHz (DL) 1.08 MHz (UL)
	Carrier Spacing	1.4 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.5 MHz
	Offset Freq-2	3.1 MHz
	Offset Freq-3	4.7 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

＊:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 1.4MHz BW (E-UTRA 1.4MHz)	Trace Points	1001
	Span Frequency	7 MHz
	RBW	10 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.095 MHz (DL) 1.08 MHz (UL)
	Carrier Spacing	1.4 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.4 MHz
	Offset Freq-2	2.8 MHz
	Offset Freq-3	4.2 MHz
	Ch BW	1.095 MHz (DL) 1.08 MHz (UL)
	Offset Filter Type	Rect

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 1.4MHz BW (E-UTRA 1.4MHz)	Trace Points	1001
	Span Frequency	7 MHz
	RBW	10 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.095 MHz (DL) 1.08 MHz (UL)
	Carrier Spacing	1.4 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.4 MHz
	Offset Freq-2	2.8 MHz
	Offset Freq-3	4.2 MHz
	Ch BW	1.095 MHz (DL) 1.08 MHz (UL)
	Offset Filter Type	Rect
	Offset Setting*	Normal

＊:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 1.4MHz BW (Adv mode)	Trace Points	1001
	Span Frequency	10 MHz
	RBW	10 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.095 MHz
	Carrier Spacing	1.4 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset Setting	Adv.
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Offset-7 On/Off	Off
	Offset-8 On/Off	Off
	Offset Freq-1	1.4 MHz
	Offset Freq-2	2.8 MHz
	Offset Freq-3	1.5 MHz
	Offset Freq-4	3.1 MHz
	Offset Freq-5	3.1 MHz
	Offset Freq-6	3.1 MHz
	Offset Freq-7	3.1 MHz
	Offset Freq-8	3.1 MHz

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 1.4MHz BW (Adv mode) (続き)	BW Offset-1	1.095 MHz
	BW Offset-2	1.095 MHz
	BW Offset-3	1.28 MHz
	BW Offset-4	1.28 MHz
	BW Offset-5	1.28 MHz
	BW Offset-6	1.28 MHz
	BW Offset-7	1.28 MHz
	BW Offset-8	1.28 MHz
	Offset Filter Type-1	Rect
	Offset Filter Type-2	Rect
	Offset Filter Type-3	Root Nyquist
	Offset Filter Type-4	Root Nyquist
	Offset Filter Type-5	Root Nyquist
	Offset Filter Type-6	Root Nyquist
	Offset Filter Type-7	Root Nyquist
	Offset Filter Type-8	Root Nyquist
	Offset Roll-off Factor-1	0.22
	Offset Roll-off Factor-2	0.22
	Offset Roll-off Factor-3	0.22
	Offset Roll-off Factor-4	0.22
	Offset Roll-off Factor-5	0.22
	Offset Roll-off Factor-6	0.22
	Offset Roll-off Factor-7	0.22
	Offset Roll-off Factor-8	0.22

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 3MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	23 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	2.715 MHz (DL) 2.7 MHz (UL)
	Carrier Spacing	3 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	4 MHz
	Offset Freq-2	9 MHz
	Offset Freq-3	14 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 3MHz BW (UTRA 1.6MHz)	Trace Points	1001
	Span Frequency	9.4 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	2.715 MHz (DL) 2.7 MHz (UL)
	Carrier Spacing	3 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	2.3 MHz
	Offset Freq-2	3.9 MHz
	Offset Freq-3	5.5 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

＊:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 3MHz BW (E-UTRA 3MHz)	Trace Points	1001
	Span Frequency	15 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	2.715 MHz (DL) 2.7 MHz (UL)
	Carrier Spacing	3 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	3 MHz
	Offset Freq-2	6 MHz
	Offset Freq-3	9 MHz
	Ch BW	2.715 MHz (DL) 2.7 MHz (UL)
	Offset Filter Type	Rect

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 3MHz BW (E-UTRA 3MHz)	Trace Points	1001
	Span Frequency	15 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	2.715 MHz (DL) 2.7 MHz (UL)
	Carrier Spacing	3 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	3 MHz
	Offset Freq-2	6 MHz
	Offset Freq-3	9 MHz
	Ch BW	2.715 MHz (DL) 2.7 MHz (UL)
	Offset Filter Type	Rect
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 3MHz BW (Adv mode)	Trace Points	1001
	Span Frequency	20 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	2.715 MHz
	Carrier Spacing	3 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset Setting	Adv.
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Offset-7 On/Off	Off
	Offset-8 On/Off	Off
	Offset Freq-1	3 MHz
	Offset Freq-2	6 MHz
	Offset Freq-3	2.3 MHz
	Offset Freq-4	3.9 MHz
	Offset Freq-5	3.9 MHz
	Offset Freq-6	3.9 MHz
	Offset Freq-7	3.9 MHz
	Offset Freq-8	3.9 MHz

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 3MHz BW (Adv mode) (続き)	BW Offset-1	4.515 MHz
	BW Offset-2	4.515 MHz
	BW Offset-3	1.28 MHz
	BW Offset-4	1.28 MHz
	BW Offset-5	1.28 MHz
	BW Offset-6	1.28 MHz
	BW Offset-7	1.28 MHz
	BW Offset-8	1.28 MHz
	Offset Filter Type-1	Rect
	Offset Filter Type-2	Rect
	Offset Filter Type-3	Root Nyquist
	Offset Filter Type-4	Root Nyquist
	Offset Filter Type-5	Root Nyquist
	Offset Filter Type-6	Root Nyquist
	Offset Filter Type-7	Root Nyquist
	Offset Filter Type-8	Root Nyquist
	Offset Roll-off Factor-1	0.22
	Offset Roll-off Factor-2	0.22
	Offset Roll-off Factor-3	0.22
	Offset Roll-off Factor-4	0.22
	Offset Roll-off Factor-5	0.22
	Offset Roll-off Factor-6	0.22
	Offset Roll-off Factor-7	0.22
	Offset Roll-off Factor-8	0.22

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 5MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	25 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.515 MHz (DL) 4.5 MHz (UL)
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 5MHz BW (UTRA 1.6MHz)	Trace Points	1001
	Span Frequency	11.4 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.515 MHz (DL) 4.5 MHz (UL)
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	3.3 MHz
	Offset Freq-2	4.9 MHz
	Offset Freq-3	6.5 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 5MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	25 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.515 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 5MHz BW (UTRA 10MHz)	Trace Points	1001
	Span Frequency	45 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.515 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	7.5 MHz
	Offset Freq-2	17.5 MHz
	Offset Freq-3	27.5 MHz
	Ch BW	7.68 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 5MHz BW (E-UTRA 5MHz)	Trace Points	1001
	Span Frequency	25 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.515 MHz (DL) 4.5 MHz (UL)
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	4.515 MHz (DL) 4.5 MHz (UL)
	Offset Filter Type	Rect

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 5MHz BW (E-UTRA 5MHz)	Trace Points	1001
	Span Frequency	25 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.515 MHz (DL) 4.5 MHz (UL)
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	4.515 MHz (DL) 4.5 MHz (UL)
	Offset Filter Type	Rect
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 5MHz BW (Adv mode)	Trace Points	1001
	Span Frequency	45 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.515 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset Setting	Adv.
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Offset-8 On/Off	On
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	3.3 MHz
	Offset Freq-4	4.9 MHz
	Offset Freq-5	5 MHz
	Offset Freq-6	10 MHz
	Offset Freq-7	7.5 MHz
	Offset Freq-8	17.5 MHz

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 5MHz BW (Adv mode) (続き)	BW Offset-1	4.515 MHz
	BW Offset-2	4.515 MHz
	BW Offset-3	1.28 MHz
	BW Offset-4	1.28 MHz
	BW Offset-5	3.84 MHz
	BW Offset-6	3.84 MHz
	BW Offset-7	7.68 MHz
	BW Offset-8	7.68 MHz
	Offset Filter Type-1	Rect
	Offset Filter Type-2	Rect
	Offset Filter Type-3	Root Nyquist
	Offset Filter Type-4	Root Nyquist
	Offset Filter Type-5	Root Nyquist
	Offset Filter Type-6	Root Nyquist
	Offset Filter Type-7	Root Nyquist
	Offset Filter Type-8	Root Nyquist
	Offset Roll-off Factor-1	0.22
	Offset Roll-off Factor-2	0.22
	Offset Roll-off Factor-3	0.22
	Offset Roll-off Factor-4	0.22
	Offset Roll-off Factor-5	0.22
	Offset Roll-off Factor-6	0.22
	Offset Roll-off Factor-7	0.22
	Offset Roll-off Factor-8	0.22

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 10MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	30 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	9.015 MHz (DL) 9 MHz (UL)
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	7.5 MHz
	Offset Freq-2	12.5 MHz
	Offset Freq-3	17.5 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 10MHz BW (UTRA 1.6MHz)	Trace Points	1001
	Span Frequency	16.4 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	9.015 MHz (DL) 9 MHz (UL)
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5.8 MHz
	Offset Freq-2	7.4 MHz
	Offset Freq-3	9 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 10MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	30 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	9.015 MHz
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	7.5 MHz
	Offset Freq-2	12.5 MHz
	Offset Freq-3	17.5 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 10MHz BW (UTRA 10MHz)	Trace Points	1001
	Span Frequency	50 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	9.015 MHz
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	10 MHz
	Offset Freq-2	20 MHz
	Offset Freq-3	30 MHz
	Ch BW	7.68 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 10MHz BW (E-UTRA 10MHz)	Trace Points	1001
	Span Frequency	50 MHz
	RBW	100 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	9.015 MHz (DL) 9 MHz (UL)
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	10 MHz
	Offset Freq-2	20 MHz
	Offset Freq-3	30 MHz
	Ch BW	9.015 MHz (DL) 9 MHz (UL)
	Offset Filter Type	Rect

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 10MHz BW (E-UTRA 10MHz)	Trace Points	1001
	Span Frequency	50 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	9.015 MHz (DL) 9 MHz (UL)
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	10 MHz
	Offset Freq-2	20 MHz
	Offset Freq-3	30 MHz
	Ch BW	9.015 MHz (DL) 9 MHz (UL)
	Offset Filter Type	Rect
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 10MHz BW (Adv mode)	Trace Points	1001
	Span Frequency	50 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	9.015 MHz
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset Setting	Adv.
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Offset-8 On/Off	On
	Offset Freq-1	10 MHz
	Offset Freq-2	20 MHz
	Offset Freq-3	5.8 MHz
	Offset Freq-4	7.4 MHz
	Offset Freq-5	7.5 MHz
	Offset Freq-6	12.5 MHz
	Offset Freq-7	10 MHz
	Offset Freq-8	20 MHz

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 10MHz BW (Adv mode) (続き)	BW Offset-1	9.015 MHz
	BW Offset-2	9.015 MHz
	BW Offset-3	1.28 MHz
	BW Offset-4	1.28 MHz
	BW Offset-5	3.84 MHz
	BW Offset-6	3.84 MHz
	BW Offset-7	7.68 MHz
	BW Offset-8	7.68 MHz
	Offset Filter Type-1	Rect
	Offset Filter Type-2	Rect
	Offset Filter Type-3	Root Nyquist
	Offset Filter Type-4	Root Nyquist
	Offset Filter Type-5	Root Nyquist
	Offset Filter Type-6	Root Nyquist
	Offset Filter Type-7	Root Nyquist
	Offset Filter Type-8	Root Nyquist
	Offset Roll-off Factor-1	0.22
	Offset Roll-off Factor-2	0.22
	Offset Roll-off Factor-3	0.22
	Offset Roll-off Factor-4	0.22
	Offset Roll-off Factor-5	0.22
	Offset Roll-off Factor-6	0.22
	Offset Roll-off Factor-7	0.22
	Offset Roll-off Factor-8	0.22

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 15MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	35 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.515 MHz (DL) 13.5 MHz (UL)
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	10 MHz
	Offset Freq-2	15 MHz
	Offset Freq-3	20 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 15MHz BW (UTRA 1.6MHz)	Trace Points	1001
	Span Frequency	21.4 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.515 MHz (DL) 13.5 MHz (UL)
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	8.3 MHz
	Offset Freq-2	9.9 MHz
	Offset Freq-3	11.5 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 15MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	35 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.515 MHz
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	10 MHz
	Offset Freq-2	15 MHz
	Offset Freq-3	20 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 15MHz BW (UTRA 10MHz)	Trace Points	1001
	Span Frequency	55 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.515 MHz
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	12.5 MHz
	Offset Freq-2	22.5 MHz
	Offset Freq-3	32.5 MHz
	Ch BW	7.68 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 15MHz BW (E-UTRA 15MHz)	Trace Points	1001
	Span Frequency	75 MHz
	RBW	100 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.515 MHz (DL) 13.5 MHz (UL)
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	15 MHz
	Offset Freq-2	30 MHz
	Offset Freq-3	45 MHz
	Ch BW	13.515 MHz (DL) 13.5 MHz (UL)
	Offset Filter Type	Rect

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 15MHz BW (E-UTRA 15MHz)	Trace Points	1001
	Span Frequency	75 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.515 MHz (DL) 13.5 MHz (UL)
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	15 MHz
	Offset Freq-2	30 MHz
	Offset Freq-3	45 MHz
	Ch BW	13.515 MHz (DL) 13.5 MHz (UL)
	Offset Filter Type	Rect
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 15MHz BW (Adv mode)	Trace Points	1001
	Span Frequency	75 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.515 MHz
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset Setting	Adv.
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Offset-8 On/Off	On
	Offset Freq-1	15 MHz
	Offset Freq-2	30 MHz
	Offset Freq-3	8.3 MHz
	Offset Freq-4	9.9 MHz
	Offset Freq-5	10 MHz
	Offset Freq-6	15 MHz
	Offset Freq-7	12.5 MHz
	Offset Freq-8	22.5 MHz

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 15MHz BW (Adv mode) (続き)	BW Offset-1	13.515 MHz
	BW Offset-2	13.515 MHz
	BW Offset-3	1.28 MHz
	BW Offset-4	1.28 MHz
	BW Offset-5	3.84 MHz
	BW Offset-6	3.84 MHz
	BW Offset-7	7.68 MHz
	BW Offset-8	7.68 MHz
	Offset Filter Type-1	Rect
	Offset Filter Type-2	Rect
	Offset Filter Type-3	Root Nyquist
	Offset Filter Type-4	Root Nyquist
	Offset Filter Type-5	Root Nyquist
	Offset Filter Type-6	Root Nyquist
	Offset Filter Type-7	Root Nyquist
	Offset Filter Type-8	Root Nyquist
	Offset Roll-off Factor-1	0.22
	Offset Roll-off Factor-2	0.22
	Offset Roll-off Factor-3	0.22
	Offset Roll-off Factor-4	0.22
	Offset Roll-off Factor-5	0.22
	Offset Roll-off Factor-6	0.22
	Offset Roll-off Factor-7	0.22
	Offset Roll-off Factor-8	0.22

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 20MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	40 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.015 MHz (DL) 18 MHz (UL)
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	12.5 MHz
	Offset Freq-2	17.5 MHz
	Offset Freq-3	22.5 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 20MHz BW (UTRA 1.6MHz)	Trace Points	1001
	Span Frequency	26.4 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.015 MHz (DL) 18 MHz (UL)
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	10.8 MHz
	Offset Freq-2	12.4 MHz
	Offset Freq-3	14 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 20MHz BW (UTRA 5MHz)	Trace Points	1001
	Span Frequency	40 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.015 MHz
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	12.5 MHz
	Offset Freq-2	17.5 MHz
	Offset Freq-3	22.5 MHz
	Ch BW	3.84 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 20MHz BW (UTRA 10MHz)	Trace Points	1001
	Span Frequency	60 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.015 MHz
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	15 MHz
	Offset Freq-2	25 MHz
	Offset Freq-3	35 MHz
	Ch BW	7.68 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 20MHz BW (E-UTRA 20MHz)	Trace Points	1001
	Span Frequency	100 MHz
	RBW	100 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.015 MHz (DL) 18 MHz (UL)
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	20 MHz
	Offset Freq-2	40 MHz
	Offset Freq-3	60 MHz
	Ch BW	18.015 MHz (DL) 18 MHz (UL)
	Offset Filter Type	Rect

表C.1-3　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 20MHz BW (E-UTRA 20MHz)	Trace Points	1001
	Span Frequency	100 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.015 MHz (DL) 18 MHz (UL)
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	20 MHz
	Offset Freq-2	40 MHz
	Offset Freq-3	60 MHz
	Ch BW	18.015 MHz (DL) 18 MHz (UL)
	Offset Filter Type	Rect
	Offset Setting*	Normal

*:　Offset Setting は Downlink のみ設定しています。

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 20MHz BW (Adv mode)	Trace Points	1001
	Span Frequency	100 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.015 MHz
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset Setting	Adv.
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Offset-8 On/Off	On
	Offset Freq-1	20 MHz
	Offset Freq-2	40 MHz
	Offset Freq-3	10.8 MHz
	Offset Freq-4	12.4 MHz
	Offset Freq-5	12.5 MHz
	Offset Freq-6	17.5 MHz
	Offset Freq-7	15 MHz
	Offset Freq-8	25 MHz

表C.1-3　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Downlink 20MHz BW (Adv mode) (続き)	BW Offset-1	18.015 MHz
	BW Offset-2	18.015 MHz
	BW Offset-3	1.28 MHz
	BW Offset-4	1.28 MHz
	BW Offset-5	3.84 MHz
	BW Offset-6	3.84 MHz
	BW Offset-7	7.68 MHz
	BW Offset-8	7.68 MHz
	Offset Filter Type-1	Rect
	Offset Filter Type-2	Rect
	Offset Filter Type-3	Root Nyquist
	Offset Filter Type-4	Root Nyquist
	Offset Filter Type-5	Root Nyquist
	Offset Filter Type-6	Root Nyquist
	Offset Filter Type-7	Root Nyquist
	Offset Filter Type-8	Root Nyquist
	Offset Roll-off Factor-1	0.22
	Offset Roll-off Factor-2	0.22
	Offset Roll-off Factor-3	0.22
	Offset Roll-off Factor-4	0.22
	Offset Roll-off Factor-5	0.22
	Offset Roll-off Factor-6	0.22
	Offset Roll-off Factor-7	0.22
	Offset Roll-off Factor-8	0.22

DSRC

表C.1-4　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
DSRC π/4DQPSK	Trace Points	1001
	Span Frequency	25 MHz
	RBW	30 kHz
	VBW	100 kHz
	VBW Mode	Power
	Detection	Positive
	Sweep Time Freq. Domain	7.1 s
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.4 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	4.4 MHz
	Offset Filter Type	Rect

表C.1-4　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
DSRC ASK	Trace Points	1001
	Span Frequency	25 MHz
	RBW	30 kHz
	VBW	100 kHz
	VBW Mode	Power
	Detection	Positive
	Sweep Time Freq. Domain	7.1 s
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	4.4 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Ch BW	4.4 MHz
	Offset Filter Type	Rect

TD-SCDMA

表C.1-5　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TD-SCDMA (Single Carrier)	Trace Points	1001
	Span Frequency	8 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (2 Carriers)	Trace Points	1001
	Span Frequency	10 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	2
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (3 Carriers)	Trace Points	1001
	Span Frequency	12 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	3
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (4 Carriers)	Trace Points	1001
	Span Frequency	13 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	4
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (5 Carriers)	Trace Points	1001
	Span Frequency	15 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	5
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (6 Carriers)	Trace Points	1001
	Span Frequency	16 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	6
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (7 Carriers)	Trace Points	1001
	Span Frequency	18 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	7
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (8 Carriers)	Trace Points	1001
	Span Frequency	20 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	8
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (9 Carriers)	Trace Points	1001
	Span Frequency	21 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	9
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (10 Carriers)	Trace Points	1001
	Span Frequency	23 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	10
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (11 Carriers)	Trace Points	1001
	Span Frequency	25 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	11
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

表C.1-5　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA (12 Carriers)	Trace Points	1001
	Span Frequency	26 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	12
	Carrier BW	1.28 MHz
	Carrier Spacing	1.6 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	1.6 MHz
	Offset Freq-2	3.2 MHz
	Offset Freq-3	4.8 MHz
	Ch BW	1.28 MHz
	Offset Filter Type	Root Nyquist
	Offset Roll-off Factor	0.22

CDMA2000

表C.1-6　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
CDMA2000 Forward Link	Trace Points	1001
	Span Frequency	4.05 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Freq. Domain	1.25 s
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.23 MHz
	Carrier Spacing	1.25 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	765 kHz
	Offset Freq-2	1.995 MHz
	Offset Freq-3	4 MHz
	Ch BW	30 kHz
	Offset Filter Type	Rect

EV-DO

表C.1-7 ACP 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
EV-DO Forward Link	Trace Points	1001
	Span Frequency	4.05 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Freq. Domain	1.667 s
	Auto Sweep Time Select	Normal
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	1.23 MHz
	Carrier Spacing	1.25 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	765 kHz
	Offset Freq-2	1.995 MHz
	Offset Freq-3	4 MHz
	Ch BW	30 kHz
	Offset Filter Type	Rect

TELEC-T403

表C.1-8　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TELEC-T403 18MHz SPAN (WLAN)	Frequency Span	100 MHz
	RBW	300 kHz
	Detection	POSITIVE
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	18 MHz
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	20 MHz
	Offset Freq-2	40 MHz
	Ch BW	18 MHz
	Offset Ch Filter Type	Rect

表C.1-8　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 19MHz SPAN (WLAN)	Frequency Span	100 MHz
	RBW	300 kHz
	Detection	POSITIVE
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	19 MHz
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	20 MHz
	Offset Freq-2	40 MHz
	Ch BW	19 MHz
	Offset Ch Filter Type	Rect

表C.1-8　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 38MHz SPAN (WLAN)	Frequency Span	200 MHz
	RBW	300 kHz
	Detection	POSITIVE
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	38 MHz
	Carrier Spacing	40 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	40 MHz
	Offset Freq-2	80 MHz
	Ch BW	38 MHz
	Offset Ch Filter Type	Rect

表C.1-8 ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 78MHz SPAN (WLAN)	Frequency Span	400 MHz
	RBW	300 kHz
	Detection	POSITIVE
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	78 MHz
	Carrier Spacing	80 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	80 MHz
	Offset Freq-2	160 MHz
	Ch BW	78 MHz
	Offset Ch Filter Type	Rect

TELEC-T405

表C.1-9　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TELEC-T405 20MHz BW (WLAN)	Frequency Span	100 MHz
	RBW	30 kHz
	Detection	POSITIVE
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	18 MHz
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	20 MHz
	Offset Freq-2	40 MHz
	Ch BW	18 MHz
	Offset Ch Filter Type	Rect

表C.1-9　ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 40MHz BW (WLAN)	Frequency Span	200 MHz
	RBW	30 kHz
	Detection	POSITIVE
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	38 MHz
	Carrier Spacing	40 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	40 MHz
	Offset Freq-2	80 MHz
	Ch BW	38 MHz
	Offset Ch Filter Type	Rect

BPSK

表C.1-10　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
BPSK 950MHz (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	600 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Offset-3 On/Off	Off
	Offset Freq-1	400 kHz
	Offset Freq-2	10 MHz
	Ch BW	200 kHz
	Offset Ch Filter Type	Rect

GFSK

表C.1-11 ACP 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
GFSK 50ksps 950MHz (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	200 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Offset-3 On/Off	Off
	Offset Freq-1	200 kHz
	Offset Freq-2	10 MHz
	Ch BW	200 kHz
	Offset Ch Filter Type	Rect

表C.1-11　ACP 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
GFSK 100ksps 950MHz (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	400 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Offset-3 On/Off	Off
	Offset Freq-1	300 kHz
	Offset Freq-2	10 MHz
	Ch BW	200 kHz
	Offset Ch Filter Type	Rect

表C.1-11　ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
GFSK 200ksps 950MHz (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	800 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Offset-3 On/Off	Off
	Offset Freq-1	500 kHz
	Offset Freq-2	10 MHz
	Ch BW	200 kHz
	Offset Ch Filter Type	Rect

表C.1-11　ACP 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
GFSK 50ksps 920MHz (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	200 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Offset-3 On/Off	Off
	Offset Freq-1	200 kHz
	Offset Freq-2	10 MHz
	Ch BW	200 kHz
	Offset Ch Filter Type	Rect

表C.1-11 ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
GFSK 100ksps 920MHz (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	400 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Offset-3 On/Off	Off
	Offset Freq-1	300 kHz
	Offset Freq-2	10 MHz
	Ch BW	200 kHz
	Offset Ch Filter Type	Rect

表C.1-11　ACP 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
GFSK 200ksps 920MHz (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	800 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Offset-3 On/Off	Off
	Offset Freq-1	500 kHz
	Offset Freq-2	10 MHz
	Ch BW	200 kHz
	Offset Ch Filter Type	Rect

表C.1-11　ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
GFSK 50ksps 802.15.4gd7 (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	75 kHz
	Carrier Spacing	150 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	150 kHz
	Offset Freq-2	300 kHz
	Ch BW	150 kHz
	Offset Ch Filter Type	Rect

表C.1-11　ACP 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
GFSK 100ksps 802.15.4gd7 (LR-WPANs)	Frequency Span	2 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	150 kHz
	Carrier Spacing	300 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	300 kHz
	Offset Freq-2	600 kHz
	Ch BW	300 kHz
	Offset Ch Filter Type	Rect

表C.1-11　ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
GFSK 200ksps 802.15.4gd7 (LR-WPANs)	Frequency Span	3 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	300 kHz
	Carrier Spacing	600 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Freq-1	600 kHz
	Offset Freq-2	1.2 MHz
	Ch BW	600 kHz
	Offset Ch Filter Type	Rect

APCO

表C.1-12　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
APCO P25 Except 700MHz-band	Frequency Span	100 kHz
	RBW	100 Hz
	Detection	RMS
	Storage Mode	Average
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	Adjacent Channel Power	On
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	12.5 kHz
	Carrier Spacing	12.5 kHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset – 1 On/Off	On
	Offset – 2 On/Off	Off
	Offset – 3 On/Off	Off
	Offset Freq – 1	12.5 kHz
	Offset Freq – 2	25 kHz
	Offset Freq – 3	15 MHz
	Ch BW	6 kHz
	Offset Ch Filter Type	Rect

表C.1-12　ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
APCO P25 700MHz-BW-6.25kHz	Frequency Span	100 kHz
	RBW	100 Hz
	Detection	RMS
	Storage Mode	Average
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	Adjacent Channel Power	On
	ACP Reference	Both Sides of Carriers
	Carrier Number	1
	Carrier BW	12.5 kHz
	Carrier Spacing	12.5 kHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset – 1 On/Off	On
	Offset – 2 On/Off	On
	Offset – 3 On/Off	On
	Offset Freq – 1	9.375 kHz
	Offset Freq – 2	15.625 kHz
	Offset Freq – 3	21.875 MHz
	Ch BW	6.25 kHz
	Offset Ch Filter Type	Rect

表C.1-12　ACP 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
APCO P25 700MHz-BW-25kHz	Frequency Span	250 kHz
	RBW	100 Hz
	Detection	RMS
	Storage Mode	Average
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	Adjacent Channel Power	On
	ACP Reference	Both Sides of Carriers
	Carrier Number	1
	Carrier BW	12.5 kHz
	Carrier Spacing	12.5 kHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset – 1 On/Off	On
	Offset – 2 On/Off	On
	Offset – 3 On/Off	On
	Offset Freq – 1	37.5 kHz
	Offset Freq – 2	62.5 kHz
	Offset Freq – 3	87.5 MHz
	Ch BW	25 kHz
	Offset Ch Filter Type	Rect

表C.1-12　ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
APCO P25 700MHz-BW-100kHz	Frequency Span	1 MHz
	RBW	100 Hz
	Detection	RMS
	Storage Mode	Average
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	Adjacent Channel Power	On
	ACP Reference	Both Sides of Carriers
	Carrier Number	1
	Carrier BW	12.5 kHz
	Carrier Spacing	12.5 kHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset – 1 On/Off	On
	Offset – 2 On/Off	On
	Offset – 3 On/Off	On
	Offset Freq – 1	150 kHz
	Offset Freq – 2	250 kHz
	Offset Freq – 3	350 MHz
	Ch BW	100 kHz
	Offset Ch Filter Type	Rect

NXDN

表C.1-13　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
NXDN BW-6.25kHz	Frequency Span	30 kHz
	RBW	100 Hz
	Detection	RMS
	Storage Mode	Average
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	Adjacent Channel Power	On
	ACP Reference	Both Sides of Carriers
	Carrier Number	1
	Carrier BW	4 kHz
	Carrier Spacing	6.25 kHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset – 1 On/Off	On
	Offset – 2 On/Off	Off
	Offset – 3 On/Off	Off
	Offset Freq – 1	6.25 kHz
	Offset Freq – 2	12.5 kHz
	Offset Freq – 3	18.75 MHz
	Ch BW	4 kHz
	Offset Ch Filter Type	Rect

表C.1-13　ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
NXDN BW-12.5kHz	Frequency Span	70 kHz
	RBW	100 Hz
	Detection	RMS
	Storage Mode	Average
	Sweep Time Switch	Auto
	Auto Sweep Time Select	Normal
	Adjacent Channel Power	On
	ACP Reference	Carrier-1
	Carrier Number	1
	Carrier BW	8.3 kHz
	Carrier Spacing	12.5 kHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	Offset – 1 On/Off	On
	Offset – 2 On/Off	Off
	Offset – 3 On/Off	Off
	Offset Freq – 1	12.5 kHz
	Offset Freq – 2	25 kHz
	Offset Freq – 3	37.5 MHz
	Ch BW	8.3 kHz
	Offset Ch Filter Type	Rect

5GNR TDD DL (sub-6G)_Conducted

表C.1-14　ACP 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (scs30k 5M BW (NR))	Frequency Span	25.5 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	3.96 MHz
	Carrier Spacing	5 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	5 MHz
	Offset Freq-2	10 MHz
	Offset Freq-3	15 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	3.96 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Con (scs30k 10M BW (NR))	Frequency Span	51 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	8.64 MHz
	Carrier Spacing	10 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	10 MHz
	Offset Freq-2	20 MHz
	Offset Freq-3	30 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	8.64 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

表C.1-14 ACP 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (scs30k 15M BW(NR))	Frequency Span	76.5 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	13.68 MHz
	Carrier Spacing	15 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	15 MHz
	Offset Freq-2	30 MHz
	Offset Freq-3	45 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	13.68 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Con (scs30k 20M BW (NR))	Frequency Span	102 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	18.36 MHz
	Carrier Spacing	20 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	20 MHz
	Offset Freq-2	40 MHz
	Offset Freq-3	60 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	18.36 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

表C.1-14　ACP 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (scs30k 25M BW (NR))	Frequency Span	127.5 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	23.4 MHz
	Carrier Spacing	25 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	25 MHz
	Offset Freq-2	50 MHz
	Offset Freq-3	75 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	23.4 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Con (scs30k 30M BW (NR))	Frequency Span	153 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	28.08 MHz
	Carrier Spacing	30 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	30 MHz
	Offset Freq-2	60 MHz
	Offset Freq-3	90 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	28.08 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

表C.1-14 ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (scs30k 40M BW (NR))	Frequency Span	204 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	38.16 MHz
	Carrier Spacing	40 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	40 MHz
	Offset Freq-2	80 MHz
	Offset Freq-3	120 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	38.16 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Con (scs30k 50M BW (NR))	Frequency Span	255 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	47.88 MHz
	Carrier Spacing	50 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	50 MHz
	Offset Freq-2	100 MHz
	Offset Freq-3	150 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	47.88 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

表C.1-14　ACP 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (scs30k 60M BW (NR))	Frequency Span	306 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	58.32 MHz
	Carrier Spacing	60 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	60 MHz
	Offset Freq-2	120 MHz
	Offset Freq-3	180 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	58.32 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Con (scs30k 70M BW (NR))	Frequency Span	357 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	68.04 MHz
	Carrier Spacing	70 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	70 MHz
	Offset Freq-2	140 MHz
	Offset Freq-3	210 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	68.04 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

表C.1-14 ACP 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (scs30k 80M BW (NR))	Frequency Span	408 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	78.12 MHz
	Carrier Spacing	80 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	80 MHz
	Offset Freq-2	160 MHz
	Offset Freq-3	240 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	78.12 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Con (scs30k 90M BW (NR))	Frequency Span	459 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	88.2 MHz
	Carrier Spacing	90 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	90 MHz
	Offset Freq-2	180 MHz
	Offset Freq-3	270 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	88.2 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

表C.1-14　ACP 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (scs30k 100M BW (NR))	Frequency Span	510 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	98.28 MHz
	Carrier Spacing	100 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	100 MHz
	Offset Freq-2	200 MHz
	Offset Freq-3	300 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	98.28 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Con (scs30k 100M BW (5MHz-E-UTRA))	Frequency Span	120 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	98.28 MHz
	Carrier Spacing	100 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	52.5 MHz
	Offset Freq-2	57.5 MHz
	Offset Freq-3	300 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	4.5 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

5GNR TDD DL (sub-6G)_Radiated

表C.1-15 ACP 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (scs30k 100M BW (NR))	Frequency Span	510 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	98.28 MHz
	Carrier Spacing	100 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	100 MHz
	Offset Freq-2	200 MHz
	Offset Freq-3	300 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	98.28 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22
5GNR TDD DL (s6G)_Rad (scs30k 100M BW (5MHz-E-UTRA))	Frequency Span	120 MHz
	Trace Points	1001
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	VBW	1 kHz
	ACP Reference	Carrier Select
	Carrier Number	1
	Carrier BW	98.28 MHz
	Carrier Spacing	100 MHz
	In Band Center	Center Frequency
	In Band Filter Type	Rect
	In Band Roll-off Factor	0.22
	Offset Freq-1	52.5 MHz
	Offset Freq-2	57.5 MHz
	Offset Freq-3	300 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset Ch Bw	4.5 MHz
	Offset Filter Type	Rect
	Offset Roll-off Factor	0.22

C.2 Burst Average Power

W-CDMA/Mobile WiMAX/LTE/DSRC

表C.2-1　Burst Average Power 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
W-CDMA Uplink/Downlink	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
Mobile WiMAX DL / UL 5ms Frame	RBW	20 MHz
	Detection	RMS
	SWP	5 ms
	Trace Point	1001
	Burst Average Power	On
LTE Uplink/Downlink Mean Power 1.4MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
LTE Uplink/Downlink Mean Power 3MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
LTE Uplink/Downlink Mean Power 5MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
LTE Uplink/Downlink Mean Power 10MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
DSRC π/4DQPSK	RBW	20 MHz
	Detection	RMS
	SWP	782 μs
	Trace Point	10001
	Burst Average Power	On

TD-SCDMA/LTE TDD/CDMA2000/EV-DO

表C.2-2 Burst Average Power 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
TD-SCDMA 5ms Subframe	RBW	20 MHz
	Detection	RMS
	SWP	5 ms
	Trace Point	1001
	Burst Average Power	On
LTE TDD Uplink/Downlink Mean Power 1.4MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
LTE TDD Uplink/Downlink Mean Power 3MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
LTE TDD Uplink/Downlink Mean Power 5MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
LTE TDD Uplink/Downlink Mean Power 10MHz BW	RBW	20 MHz
	Detection	RMS
	SWP	10 ms
	Trace Point	1001
	Burst Average Power	On
CDMA2000 Forward Link	RBW	5 MHz
	Detection	RMS
	SWP	1.25 ms
	Trace Point	1001
	Burst Average Power	On
EV-DO Forward Link	RBW	5 MHz
	Detection	RMS
	SWP	1.667 ms
	Trace Point	1001
	Burst Average Power	On

C.3 Channel Power

W-CDMA

表C.3-1　Channel Power 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
W-CDMA Uplink/Downlink (Mean Power)	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	5 MHz
	Filter Type	Rect
W-CDMA Uplink/Downlink (RRC Filtered Power)	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	3.84 MHz
	Filter Type	Root Nyquist
	Filter Roll-off Factor	0.22

Mobile WiMAX

表C.3-2　Channel Power 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
Mobile WiMAX DL / UL 10MHz BW	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	10 MHz
	Filter Type	Rect
Mobile WiMAX DL / UL 5MHz BW	Frequency Span	15 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	5 MHz
	Filter Type	Rect

LTE

表C.3-3　Channel Power 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
LTE Uplink/Downlink Mean Power 1.4MHz BW	Frequency Span	2.8 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	1.4 MHz
	Filter Type	Rect
LTE Uplink/Downlink Mean Power 3MHz BW	Frequency Span	6 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	3 MHz
	Filter Type	Rect
LTE Uplink/Downlink Mean Power 5MHz BW	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	5 MHz
	Filter Type	Rect

表C.3-3 Channel Power 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink Mean Power 10MHz BW	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	10 MHz
	Filter Type	Rect
LTE Uplink/Downlink Mean Power 15MHz BW	Frequency Span	30 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	15 MHz
	Filter Type	Rect
LTE Uplink/Downlink Mean Power 20MHz BW	Frequency Span	40 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	20 MHz
	Filter Type	Rect

表C.3-3　Channel Power 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
LTE Uplink/Downlink Filtered Power 1.4MHz BW	Frequency Span	2.8 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	1.095 MHz (DL) 1.08 MHz (UL)
	Filter Type	Rect
LTE Uplink/Downlink Filtered Power 3MHz BW	Frequency Span	6 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	2.715 MHz (DL) 2.7 MHz (UL)
	Filter Type	Rect
LTE Uplink/Downlink Filtered Power 5MHz BW	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	4.515 MHz (DL) 4.5 MHz (UL)
	Filter Type	Rect

表C.3-3 Channel Power 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink Filtered Power 10MHz BW	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	9.015 MHz (DL) 9 MHz (UL)
	Filter Type	Rect
LTE Uplink/Downlink Filtered Power 15MHz BW	Frequency Span	30 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	13.515 MHz (DL) 13.5 MHz (UL)
	Filter Type	Rect
LTE Uplink/Downlink Filtered Power 20MHz BW	Frequency Span	40 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	18.015 MHz (DL) 18 MHz (UL)
	Filter Type	Rect

LTE TDD

表C.3-4　Channel Power 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink Mean Power 1.4MHz BW	Frequency Span	2.8 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	1.4 MHz
	Filter Type	Rect
LTE TDD Uplink/Downlink Mean Power 3MHz BW	Frequency Span	6 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	3 MHz
	Filter Type	Rect
LTE TDD Uplink/Downlink Mean Power 5MHz BW	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	5 MHz
	Filter Type	Rect

表C.3-4 Channel Power 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink Mean Power 10MHz BW	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	10 MHz
	Filter Type	Rect
LTE TDD Uplink/Downlink Mean Power 15MHz BW	Frequency Span	30 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	15 MHz
	Filter Type	Rect
LTE TDD Uplink/Downlink Mean Power 20MHz BW	Frequency Span	40 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	20 MHz
	Filter Type	Rect

表C.3-4　Channel Power 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink Filtered Power 1.4MHz BW	Frequency Span	2.8 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	1.095 MHz (DL) 1.08 MHz (UL)
	Filter Type	Rect
LTE TDD Uplink/Downlink Filtered Power 3MHz BW	Frequency Span	6 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	2.715 MHz (DL) 2.7 MHz (UL)
	Filter Type	Rect
LTE TDD Uplink/Downlink Filtered Power 5MHz BW	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	4.515 MHz (DL) 4.5 MHz (UL)
	Filter Type	Rect

表C.3-4 Channel Power 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink Filtered Power 10MHz BW	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	9.015 MHz (DL) 9 MHz (UL)
	Filter Type	Rect
LTE TDD Uplink/Downlink Filtered Power 15MHz BW	Frequency Span	30 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	13.515 MHz (DL) 13.5 MHz (UL)
	Filter Type	Rect
LTE TDD Uplink/Downlink Filtered Power 20MHz BW	Frequency Span	40 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	18.015 MHz (DL) 18 MHz (UL)
	Filter Type	Rect

DSRC/TD-SCDMA

表C.3-5　Channel Power 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
DSRC π/4DQPSK	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	7.1 s
	Auto Sweep Time Select	Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	4.4 MHz
	Filter Type	Rect
DSRC ASK	Frequency Span	10 MHz
	RBW	Auto
	Detection	Positive
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	7.1 s
	Auto Sweep Time Select	Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	4.4 MHz
	Filter Type	Rect
TD-SCDMA	Frequency Span	2 MHz
	RBW	Auto
	Detection	RMS
	Gate Length	662.5 μs
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	1.6 MHz
	Filter Type	Rect

XG-PHS

表C.3-6 Channel Power 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
XG-PHS Mean Power 10MHz BW	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	Gate Sweep	Off
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	5000 ms
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	10 MHz
	Filter Type	Rect
XG-PHS Mean Power 20MHz BW	Frequency Span	40 MHz
	RBW	Auto
	Detection	RMS
	Gate Sweep	Off
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	5000 ms
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	20 MHz
	Filter Type	Rect

CDMA2000/EV-DO

表C.3-7　Channel Power 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
CDMA2000 Forward Link	Frequency Span	2.5 MHz
	RBW	Auto
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	1.25 s
	Auto Sweep Time Select	Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	1.23 MHz
	Filter Type	Rect
EV-DO Forward Link	Frequency Span	2.5 MHz
	RBW	Auto
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	1.667 s
	Auto Sweep Time Select	Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	1.23 MHz
	Filter Type	Rect

ISDB-Tmm/ISDB-T

表C.3-8 Channel Power 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
ISDB-Tmm 14.2MHz BW (Mean Power)	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	14.2 MHz
	Filter Type	Rect
ISDB-Tmm (ISDB-T) 5.6MHz BW (Mean Power)	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	5.6 MHz
	Filter Type	Rect
ISDB-T 5.6MHz BW (Mean Power)	Frequency Span	10 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	5.6 MHz
	Filter Type	Rect

ISDB-T_{SB}

表C.3-9　Channel Power 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
ISDB-T_{SB} 3.9MHz BW (Mean Power)	Frequency Span	20 MHz
	RBW	Auto
	Detection	RMS
	SWP	Auto, Normal
	Trace Point	1001
	Channel Power	On
	Channel Center	Center Frequency
	Channel Width	3.9 MHz
	Filter Type	Rect

5GNR TDD DL (sub-6G)_Conducted

表C.3-10 Channel Power 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (Mean Power 5M BW)	Frequency Span	10 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	5 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 10M BW)	Frequency Span	20 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	10 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 15M BW)	Frequency Span	30 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	15 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 20M BW)	Frequency Span	40 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	20 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 25M BW)	Frequency Span	50 MHz
	Trace Points	501
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	25 MHz
	Filter Type	Rect

表C.3-10　Channel Power 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (Mean Power 30M BW)	Frequency Span	60 MHz
	Trace Points	1001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	30 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 40M BW)	Frequency Span	80 MHz
	Trace Points	1001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	40 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 50M BW)	Frequency Span	100 MHz
	Trace Points	1001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	50 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 60M BW)	Frequency Span	120 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	60 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 70M BW)	Frequency Span	140 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	70 MHz
	Filter Type	Rect

表C.3-10 Channel Power 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (Mean Power 80M BW)	Frequency Span	160 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	80 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 90M BW)	Frequency Span	180 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	90 MHz
	Filter Type	Rect
5GNR TDD DL (s6G)_Con (Mean Power 100M BW)	Frequency Span	200 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	100 MHz
	Filter Type	Rect

5GNR TDD DL (sub-6G)_Radiated

表C.3-11 Channel Power 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (Mean Power 100M BW)	Frequency Span	200 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Channel Center	Center Frequency
	Channel Width	100 MHz
	Filter Type	Rect

C.4 OBW

W-CDMA/Mobile WiMAX

表C.4-1　OBW 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
W-CDMA Uplink/Downlink	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	10 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
Mobile WiMAX DL / UL 10MHz BW	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	30 MHz
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Fast
	OBW	On
	Trace Point	1001
Mobile WiMAX DL / UL 5MHz BW	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	15 MHz
	RBW	100 kHz
	Detection	Positive
	SWP	Auto, Fast
	OBW	On
	Trace Point	1001

LTE

表C.4-2 OBW 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
LTE Uplink/Downlink 1.4MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	2.8 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
LTE Uplink/Downlink 3MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	6 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
LTE Uplink/Downlink 5MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	10 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

表C.4-2　OBW 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink/Downlink 10MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	20 MHz
	RBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
LTE Uplink/Downlink 15MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	30 MHz
	RBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
LTE Uplink/Downlink 20MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	40 MHz
	RBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

LTE TDD

表C.4-3 OBW 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 1.4MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	2.8 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	401 (DL) 1001 (UL)
LTE TDD Uplink/Downlink 3MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	6 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	401 (DL) 1001 (UL)
LTE TDD Uplink/Downlink 5MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	10 MHz
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

表C.4-3　OBW 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE TDD Uplink/Downlink 10MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	20 MHz
	RBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
LTE TDD Uplink/Downlink 15MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	30 MHz
	RBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
LTE TDD Uplink/Downlink 20MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	40 MHz
	RBW	100 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

DSRC

表C.4-4 OBW 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
DSRC π/4DQPSK	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	10 MHz
	RBW	30 kHz
	VBW	30 kHz
	VBW Mode	Power
	Detection	Positive
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	7.1 s
	Auto Sweep Time Select	Normal
	OBW	On
	Trace Point	1001
DSRC ASK	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	10 MHz
	RBW	30 kHz
	VBW	30 kHz
	VBW Mode	Power
	Detection	Positive
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	7.1 s
	Auto Sweep Time Select	Normal
	OBW	On
	Trace Point	1001

TD-SCDMA/XG-PHS/CDMA2000/EV-DO

表C.4-5　OBW 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TD-SCDMA	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	5 MHz
	RBW	30 kHz
	Detection	RMS
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	OBW	On
	Trace Point	1001
XG-PHS 10MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	20 MHz
	RBW	100 kHz
	VBW	300 kHz
	Storage Mode	Max Hold
	Storage Count	10
	Detection	Positive
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	5000 ms
	Auto Sweep Time Select	Normal
	OBW	On
	Trace Point	1001

表C.4-5　OBW 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
XG-PHS 20MHz Bandwidth	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	40 MHz
	RBW	100 kHz
	VBW	300 kHz
	Storage Mode	Max Hold
	Storage Count	10
	Detection	Positive
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	5000 ms
	Auto Sweep Time Select	Normal
	OBW	On
	Trace Point	1001
CDMA2000 Forward Link	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	4 MHz
	RBW	30 kHz
	Detection	Positive
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	1.25 s
	Auto Sweep Time Select	Normal
	OBW	On
	Trace Point	1001
EV-DO Forward Link	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	4 MHz
	RBW	30 kHz
	Detection	Positive
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	1.667 s
	Auto Sweep Time Select	Normal
	OBW	On
	Trace Point	1001

ISDB-Tmm/ISDB-T/ISDB-T_{SB}

表C.4-6　OBW 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
ISDB-Tmm 14.2MHz BW	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	20 MHz
	RBW	10 kHz
	Detection	RMS
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
ISDB-Tmm (ISDB-T) 5.6MHz BW	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	20 MHz
	RBW	10 kHz
	VBW	300 Hz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
ISDB-T 5.6MHz BW	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	20 MHz
	RBW	10 kHz
	VBW	300 Hz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
ISDB-T_{SB} 3.9MHz BW	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	20 MHz
	RBW	10 kHz
	VBW	300 Hz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

TELEC-T401/TELEC-T403

表C.4-7 OBW 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
TELEC-T401 DSSS/CCK (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	60 MHz
	RBW	300 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
TELEC-T401 OFDM (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	80 MHz
	RBW	300 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
TELEC-T403 20MHz (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	60 MHz
	RBW	300 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

表C.4-7　OBW 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 40MHz (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	80 MHz
	RBW	300 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
TELEC-T403 80MHz (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	160 MHz
	RBW	300 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
TELEC-T403 160MHz (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	320 MHz
	RBW	300 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

TELEC-T405

表C.4-8　OBW 機能の Standard パラメータ一覧

Standard	パラメータ名	設定値
TELEC-T405 20MHz (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	60 MHz
	RBW	30 kHz
	VBW	30 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
TELEC-T405 40MHz (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	80 MHz
	RBW	30 kHz
	VBW	30 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

ETSI EN 301 893

表C.4-9　OBW 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 5MHZ (WLAN)	Method	xdB Down
	XdB Value	6 dB
	Frequency Span	10 MHz
	RBW	100 kHz
	VBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
ETSI EN 301 893 V1.5.1 OFDM 10MHZ (WLAN)	Method	xdB Down
	XdB Value	6 dB
	Frequency Span	20 MHz
	RBW	100 kHz
	VBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
ETSI EN 301 893 V1.5.1 OFDM 20MHZ (WLAN)	Method	xdB Down
	XdB Value	6 dB
	Frequency Span	40 MHz
	RBW	100 kHz
	VBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001

表C.4-9 OBW 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 40MHZ (WLAN)	Method	xdB Down
	XdB Value	6 dB
	Frequency Span	80 MHz
	RBW	100 kHz
	VBW	100 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	1001
ETSI EN 301 893 V1.5.1 OFDM 80MHZ (WLAN)	Method	N% of Power
	N% Ratio	99.00%
	Frequency Span	160 MHz
	RBW	100 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	10001
ETSI EN 301 893 V1.5.1 OFDM 160MHZ (WLAN)	Method	N% of Power
	XdB Value	99.00%
	Frequency Span	320 MHz
	RBW	100 kHz
	VBW	300 kHz
	Detection	Positive
	SWP	Auto, Normal
	OBW	On
	Trace Point	10001

5GNR TDD DL (sub-6G)_Conducted

表C.4-10　OBW 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (5M BW)	Frequency Span	10 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (10M BW)	Frequency Span	20 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (15M BW)	Frequency Span	30 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (20M BW)	Frequency Span	40 MHz
	Trace Points	401
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (25M BW)	Frequency Span	50 MHz
	Trace Points	501
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99

表C.4-10 OBW 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (30M BW)	Frequency Span	60 MHz
	Trace Points	1001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (40M BW)	Frequency Span	80 MHz
	Trace Points	1001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (50M BW)	Frequency Span	100 MHz
	Trace Points	1001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (60M BW)	Frequency Span	120 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (70M BW)	Frequency Span	140 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99

表C.4-10　OBW 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (80M BW)	Frequency Span	160 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (90M BW)	Frequency Span	180 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99
5GNR TDD DL (s6G)_Con (100M BW)	Frequency Span	200 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99

5GNR TDD DL (sub-6G)_Radiated

表C.4-11　OBW 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (100M BW)	Frequency Span	200 MHz
	Trace Points	2001
	RBW	30 kHz
	Detection	RMS
	SWP	Auto, Normal
	Method	N%
	N Ratio	99

C.5 SEM

W-CDMA

表C.5-1 SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
W-CDMA Uplink	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3.84 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	4 MHz
	Offset-3 Start Freq	7.5 MHz
	Offset-4 Start Freq	8.5 MHz
	Offset-1 Stop Freq	3.485 MHz
	Offset-2 Stop Freq	7.5 MHz
	Offset-3 Stop Freq	8.5 MHz
	Offset-4 Stop Freq	12 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Uplink	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	10001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	1 MHz
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto

表C.5-1 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Uplink	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–69.6 dBm
	Limit-2 ABS1 Start Level	–54.3 dBm
	Limit-3 ABS1 Start Level	–54.3 dBm
	Limit-4 ABS1 Start Level	–54.3 dBm
	Limit-1 ABS1 Stop Level	–69.6 dBm
	Limit-2 ABS1 Stop Level	–54.3 dBm
	Limit-3 ABS1 Stop Level	–54.3 dBm
	Limit-4 ABS1 Stop Level	–54.3 dBm
	Limit-1 ABS2 Start Level	–15 dBm
	Limit-2 ABS2 Start Level	–13 dBm
	Limit-3 ABS2 Start Level	–13 dBm
	Limit-4 ABS2 Start Level	–13 dBm
	Limit-1 ABS2 Stop Level	–15 dBm
	Limit-2 ABS2 Stop Level	–13 dBm
	Limit-3 ABS2 Stop Level	–13 dBm
	Limit-4 ABS2 Stop Level	–13 dBm
	Limit-1 REL Start Level	–33.73 dB
	Limit-2 REL Start Level	–34 dB
	Limit-3 REL Start Level	–37.5 dB
	Limit-4 REL Start Level	–47.5 dB
	Limit-1 REL Stop Level	–48.28 dB
	Limit-2 REL Stop Level	–37.5 dB
	Limit-3 REL Stop Level	–47.5 dB
	Limit-4 REL Stop Level	–47.5 dB
	Limit-1 Fail Logic	ABS1 or REL
	Limit-2 Fail Logic	ABS1 or REL
	Limit-3 Fail Logic	ABS1 or REL
	Limit-4 Fail Logic	ABS1 or REL
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Uplink (Additional)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3.84 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	4 MHz
	Offset-3 Start Freq	7.5 MHz
	Offset-4 Start Freq	8.5 MHz
	Offset-1 Stop Freq	3.485 MHz
	Offset-2 Stop Freq	7.5 MHz
	Offset-3 Stop Freq	8.5 MHz
	Offset-6 Stop Freq	12 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-1 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Uplink (Additional)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	10001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	1 MHz
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–69.6 dBm
	Limit-2 ABS1 Start Level	–54.3 dBm
	Limit-3 ABS1 Start Level	–54.3 dBm
	Limit-4 ABS1 Start Level	–54.3 dBm
	Limit-1 ABS1 Stop Level	–69.6 dBm
	Limit-2 ABS1 Stop Level	–54.3 dBm
	Limit-3 ABS1 Stop Level	–54.3 dBm
	Limit-4 ABS1 Stop Level	–54.3 dBm
	Limit-1 ABS2 Start Level	–15 dBm
	Limit-2 ABS2 Start Level	–13 dBm
	Limit-3 ABS2 Start Level	–13 dBm
	Limit-4 ABS2 Start Level	–13 dBm

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Uplink (Additional)	Limit-1 ABS2 Stop Level	–15 dBm
	Limit-2 ABS2 Stop Level	–13 dBm
	Limit-3 ABS2 Stop Level	–13 dBm
	Limit-4 ABS2 Stop Level	–13 dBm
	Limit-1 REL Start Level	–33.73 dB
	Limit-2 REL Start Level	–34 dB
	Limit-3 REL Start Level	–37.5 dB
	Limit-4 REL Start Level	–47.5 dB
	Limit-1 REL Stop Level	–48.28 dB
	Limit-2 REL Stop Level	–37.5 dB
	Limit-3 REL Stop Level	–47.5 dB
	Limit-4 REL Stop Level	–47.5 dB
	Limit-1 Fail Logic	(ABS1 or REL) and ABS2
	Limit-2 Fail Logic	(ABS1 or REL) and ABS2
	Limit-3 Fail Logic	(ABS1 or REL) and ABS2
	Limit-4 Fail Logic	(ABS1 or REL) and ABS2
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-1 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P ≥ 43dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.715 MHz
	Offset-3 Start Freq	3.515 MHz
	Offset-4 Start Freq	4.0 MHz
	Offset-5 Start Freq	8.0 MHz
	Offset-1 Stop Freq	2.715 MHz
	Offset-2 Stop Freq	3.515 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-4 Stop Freq	8.0 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	1 MHz

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P ≥ 43dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	10001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-5 Integrate BW	Auto

表C.5-1 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P ≥ 43dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–12.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-3 ABS1 Start Level	–24.5 dBm
	Limit-4 ABS1 Start Level	–11.5 dBm
	Limit-5 ABS1 Start Level	–11.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–24.5 dBm
	Limit-3 ABS1 Stop Level	–24.5 dBm
	Limit-4 ABS1 Stop Level	–11.5 dBm
	Limit-5 ABS1 Stop Level	–11.5 dBm
	Limit-1 ABS2 Start Level	–15 dBm
	Limit-2 ABS2 Start Level	–15 dBm
	Limit-4 ABS2 Start Level	–13 dBm
	Limit-5 ABS2 Start Level	–13 dBm
	Limit-1 ABS2 Stop Level	–15 dBm
	Limit-2 ABS2 Stop Level	–15 dBm
	Limit-4 ABS2 Stop Level	–13 dBm
	Limit-5 ABS2 Stop Level	–13 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	Off

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P ≥ 43dBm) (Additional)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.715 MHz
	Offset-3 Start Freq	3.515 MHz
	Offset-4 Start Freq	4.0 MHz
	Offset-5 Start Freq	8.0 MHz
	Offset-1 Stop Freq	2.715 MHz
	Offset-2 Stop Freq	3.515 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-4 Stop Freq	8.0 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto

表C.5-1 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P ≥ 43dBm) (Additional)	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	10001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P ≥ 43dBm) (Additional)	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–12.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-3 ABS1 Start Level	–24.5 dBm
	Limit-4 ABS1 Start Level	–11.5 dBm
	Limit-5 ABS1 Start Level	–11.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–24.5 dBm
	Limit-3 ABS1 Stop Level	–24.5 dBm
	Limit-4 ABS1 Stop Level	–11.5 dBm
	Limit-5 ABS1 Stop Level	–11.5 dBm
	Limit-1 ABS2 Start Level	–15 dBm
	Limit-2 ABS2 Start Level	–15 dBm
	Limit-4 ABS2 Start Level	–13 dBm
	Limit-5 ABS2 Start Level	–13 dBm
	Limit-1 ABS2 Stop Level	–15 dBm
	Limit-2 ABS2 Stop Level	–15 dBm
	Limit-4 ABS2 Stop Level	–13 dBm
	Limit-5 ABS2 Stop Level	–13 dBm
	Limit-1 Fail Logic	ABS1 and ABS2
	Limit-2 Fail Logic	ABS1 and ABS2
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1 and ABS2
	Limit-5 Fail Logic	ABS1 and ABS2
	Limit-6 Fail Logic	Off

表C.5-1 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (39dBm≦P < 43dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.715 MHz
	Offset-3 Start Freq	3.515 MHz
	Offset-4 Start Freq	4.0 MHz
	Offset-5 Start Freq	8.0 MHz
	Offset-1 Stop Freq	2.715 MHz
	Offset-2 Stop Freq	3.515 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-4 Stop Freq	8.0 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	1 MHz

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (39dBm≦P < 43dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	10001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-5 Integrate BW	Auto

表C.5-1 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (39dBm≦P < 43dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–12.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-3 ABS1 Start Level	–24.5 dBm
	Limit-4 ABS1 Start Level	–11.5 dBm
	Limit-5 ABS1 Start Level	–13 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–24.5 dBm
	Limit-3 ABS1 Stop Level	–24.5 dBm
	Limit-4 ABS1 Stop Level	–11.5 dBm
	Limit-5 ABS1 Stop Level	–13 dBm
	Limit-1 ABS2 Start Level	–15 dBm
	Limit-2 ABS2 Start Level	–15 dBm
	Limit-3 ABS2 Start Level	–13 dBm
	Limit-4 ABS2 Start Level	–13 dBm
	Limit-1 ABS2 Stop Level	–15 dBm
	Limit-2 ABS2 Stop Level	–15 dBm
	Limit-3 ABS2 Stop Level	–13 dBm
	Limit-4 ABS2 Stop Level	–13 dBm
	Limit-5 REL Start Level	–54.5 dB
	Limit-5 REL Stop Level	–54.5 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	Off

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (39dBm≦P < 43dBm) (Additional)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.715 MHz
	Offset-3 Start Freq	3.515 MHz
	Offset-4 Start Freq	4.0 MHz
	Offset-5 Start Freq	8.0 MHz
	Offset-1 Stop Freq	2.715 MHz
	Offset-2 Stop Freq	3.515 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-4 Stop Freq	8.0 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	1 MHz

表C.5-1 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (39dBm≦P < 43dBm) (Additional)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	10001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-5 Integrate BW	Auto

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (39dBm≦P < 43dBm) (Additional)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–12.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-3 ABS1 Start Level	–24.5 dBm
	Limit-4 ABS1 Start Level	–11.5 dBm
	Limit-5 ABS1 Start Level	–13 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–24.5 dBm
	Limit-3 ABS1 Stop Level	–24.5 dBm
	Limit-4 ABS1 Stop Level	–11.5 dBm
	Limit-5 ABS1 Stop Level	–13 dBm
	Limit-1 ABS2 Start Level	–15 dBm
	Limit-2 ABS2 Start Level	–15 dBm
	Limit-3 ABS2 Start Level	–13 dBm
	Limit-4 ABS2 Start Level	–13 dBm
	Limit-1 ABS2 Stop Level	–15 dBm
	Limit-2 ABS2 Stop Level	–15 dBm
	Limit-3 ABS2 Stop Level	–13 dBm
	Limit-4 ABS2 Stop Level	–13 dBm
	Limit-5 REL Start Level	–54.5 dB
	Limit-5 REL Stop Level	–54.5 dB
	Limit-1 Fail Logic	ABS1 and ABS2
	Limit-2 Fail Logic	ABS1 and ABS2
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1 and ABS2
	Limit-5 Fail Logic	ABS1 and REL
	Limit-6 Fail Logic	Off

表C.5-1 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (31dBm≦P < 39dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.715 MHz
	Offset-3 Start Freq	3.515 MHz
	Offset-4 Start Freq	4.0 MHz
	Offset-5 Start Freq	8.0 MHz
	Offset-1 Stop Freq	2.715 MHz
	Offset-2 Stop Freq	3.515 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-4 Stop Freq	8.0 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	1 MHz

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (31dBm≦P < 39dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	10001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-5 Integrate BW	Auto

表C.5-1 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (31dBm≦P < 39dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–15 dBm
	Limit-2 ABS1 Start Level	–15 dBm
	Limit-4 ABS1 Start Level	–13 dBm
	Limit-5 ABS1 Start Level	–13 dBm
	Limit-1 ABS1 Stop Level	–15 dBm
	Limit-2 ABS1 Stop Level	–15 dBm
	Limit-4 ABS1 Stop Level	–13 dBm
	Limit-5 ABS1 Stop Level	–13 dBm
	Limit-1 REL Start Level	–51.5 dB
	Limit-2 REL Start Level	–51.5 dB
	Limit-3 REL Start Level	–63.5 dB
	Limit-4 REL Start Level	–50.5 dB
	Limit-5 REL Start Level	–54.5 dB
	Limit-1 REL Stop Level	–51.5 dB
	Limit-2 REL Stop Level	–63.5 dB
	Limit-3 REL Stop Level	–63.5 dB
	Limit-4 REL Stop Level	–50.5 dB
	Limit-5 REL Stop Level	–54.5 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	Off

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (31dBm≦P < 39dBm) (Additional)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.715 MHz
	Offset-3 Start Freq	3.515 MHz
	Offset-4 Start Freq	4.0 MHz
	Offset-5 Start Freq	8.0 MHz
	Offset-1 Stop Freq	2.715 MHz
	Offset-2 Stop Freq	3.515 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-4 Stop Freq	8.0 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	1 MHz

表C.5-1 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (31dBm≦P < 39dBm) (Additional)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	10001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-5 Integrate BW	Auto

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (31dBm≦P < 39dBm) (Additional)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–15 dBm
	Limit-2 ABS1 Start Level	–15 dBm
	Limit-4 ABS1 Start Level	–13 dBm
	Limit-5 ABS1 Start Level	–13 dBm
	Limit-1 ABS1 Stop Level	–15 dBm
	Limit-2 ABS1 Stop Level	–15 dBm
	Limit-4 ABS1 Stop Level	–13 dBm
	Limit-5 ABS1 Stop Level	–13 dBm
	Limit-1 REL Start Level	–51.5 dB
	Limit-2 REL Start Level	–51.5 dB
	Limit-3 REL Start Level	–63.5 dB
	Limit-4 REL Start Level	–50.5 dB
	Limit-5 REL Start Level	–54.5 dB
	Limit-1 REL Stop Level	–51.5 dB
	Limit-2 REL Stop Level	–63.5 dB
	Limit-3 REL Stop Level	–63.5 dB
	Limit-4 REL Stop Level	–50.5 dB
	Limit-5 REL Stop Level	–54.5 dB
	Limit-1 Fail Logic	ABS1 and REL
	Limit-2 Fail Logic	ABS1 and REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	ABS1 and REL
	Limit-5 Fail Logic	ABS1 and REL
	Limit-6 Fail Logic	Off

表C.5-1 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P < 31dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.715 MHz
	Offset-3 Start Freq	3.515 MHz
	Offset-4 Start Freq	4.0 MHz
	Offset-5 Start Freq	8.0 MHz
	Offset-1 Stop Freq	2.715 MHz
	Offset-2 Stop Freq	3.515 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-4 Stop Freq	8.0 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	1 MHz

表C.5-1　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P < 31dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	10001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-5 Integrate BW	Auto

表C.5-1 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
W-CDMA Downlink (P < 31dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–20.5 dBm
	Limit-2 ABS1 Start Level	–20.5 dBm
	Limit-3 ABS1 Start Level	–32.5 dBm
	Limit-4 ABS1 Start Level	–19.5 dBm
	Limit-5 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–20.5 dBm
	Limit-2 ABS1 Stop Level	–32.5 dBm
	Limit-3 ABS1 Stop Level	–32.5 dBm
	Limit-4 ABS1 Stop Level	–19.5 dBm
	Limit-5 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	Off

Mobile WiMAX

表C.5-2　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
Mobile WiMAX Downlink 5MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.5 MHz
	Offset-2 Start Freq	3.5 MHz
	Offset-1 Stop Freq	3.5 MHz
	Offset-2 Stop Freq	12.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	10 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	50 kHz
	Offset-2 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-Fail Logic	ABS1

表C.5-2 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Mobile WiMAX Uplink 5MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	1 MHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.5 MHz
	Offset-2 Start Freq	3.5 MHz
	Offset-3 Start Freq	7.5 MHz
	Offset-4 Start Freq	8 MHz
	Offset-5 Start Freq	10.4 MHz
	Offset-1 Stop Freq	3.5 MHz
	Offset-2 Stop Freq	7.5 MHz
	Offset-3 Stop Freq	8 MHz
	Offset-4 Stop Freq	10.4 MHz
	Offset-5 Stop Freq	12.5 MHz
	Offset-Reference Level	Auto
	Offset-1 RBW	10 kHz
	Offset-2 RBW	100 kHz
	Offset-3, 4, 5 RBW	1 MHz
	Offset-Sweep Time	Auto
	Offset-Auto Sweep Time	Normal
	Offset-Detection	RMS
	Offset-Trace Point	1001
	Offset-1 Integrate BW	50 kHz
	Offset-2 Integrate BW	1 MHz
	Offset-3, 4, 5 Integrate BW	Auto
	Offset-1 / 2 / 3 / 4 / 5 On/Off	On
	Offset-6 On/Off	Off

表C.5-2　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Mobile WiMAX Uplink 5MHz BW	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–20.0 dBm
	Limit-4 ABS1 Start Level	–25.0 dBm
	Limit-5 ABS1 Start Level	–25.03 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–21.14 dBm
	Limit-4 ABS1 Stop Level	–25.0 dBm
	Limit-5 ABS1 Stop Level	–28.56 dBm
	Limit-Fail Logic	ABS1

表C.5-2　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Mobile WiMAX Downlink 10MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	5 MHz
	Offset-2 Start Freq	6 MHz
	Offset-1 Stop Freq	6 MHz
	Offset-2 Stop Freq	25.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-2　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Mobile WiMAX Uplink 10MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	1 MHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	5 MHz
	Offset-2 Start Freq	6 MHz
	Offset-3 Start Freq	10 MHz
	Offset-4 Start Freq	11 MHz
	Offset-5 Start Freq	15 MHz
	Offset-6 Start Freq	20 MHz
	Offset-1 Stop Freq	6 MHz
	Offset-2 Stop Freq	10 MHz
	Offset-3 Stop Freq	11 MHz
	Offset-4 Stop Freq	15 MHz
	Offset-5 Stop Freq	20 MHz
	Offset-6 Stop Freq	25 MHz
	Offset-Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3, 4, 5 RBW	1 MHz
	Offset-Sweep Time	Auto
	Offset-Auto Sweep Time	Normal
	Offset-Detection	RMS
	Offset-Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	1 MHz
	Offset-3,4,5 Integrate BW	Auto
	Offset-On/Off	On

表C.5-2　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Mobile WiMAX Uplink 10MHz BW	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–13.0 dBm
	Limit-4 ABS1 Start Level	–25.0 dBm
	Limit-5 ABS1 Start Level	–28.57 dBm
	Limit-6 ABS1 Start Level	–37.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–25.0 dBm
	Limit-4 ABS1 Stop Level	–25.0 dBm
	Limit-5 ABS1 Stop Level	–37.0 dBm
	Limit-6 ABS1 Start Level	–37.0 dBm
	Limit-Fail Logic	ABS1

LTE/LTE TDD Downlink

表C.5-3　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryA < 1GHz 1.4MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	0.750 MHz
	Offset-2 Start Freq	2.150 MHz
	Offset-1 Stop Freq	2.150 MHz
	Offset-2 Stop Freq	3.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryA < 1GHz 1.4MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	0.5 dBm
	Limit-2 ABS1 Start Level	–9.5 dBm
	Limit-1 ABS1 Stop Level	–9.5 dBm
	Limit-2 ABS1 Stop Level	–9.5 dBm
	Limit-1 ABS2 Start Level	0.5 dBm
	Limit-2 ABS2 Start Level	–9.5 dBm
	Limit-1 ABS2 Stop Level	–9.5 dBm
	Limit-2 ABS2 Stop Level	–9.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 3MHz BW) LTE TDD Downlink (CategoryA < 1GHz 3MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.550 MHz
	Offset-2 Start Freq	4.550 MHz
	Offset-1 Stop Freq	4.550 MHz
	Offset-2 Stop Freq	7.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 3MHz BW) LTE TDD Downlink (CategoryA < 1GHz 3MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–3.5 dBm
	Limit-2 ABS1 Start Level	–13.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–13.5 dBm
	Limit-1 ABS2 Start Level	–3.5 dBm
	Limit-2 ABS2 Start Level	–13.5 dBm
	Limit-1 ABS2 Stop Level	–13.5 dBm
	Limit-2 ABS2 Stop Level	–13.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 5MHz BW) LTE TDD Downlink (CategoryA < 1GHz 5MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.550 MHz
	Offset-2 Start Freq	7.550 MHz
	Offset-1 Stop Freq	7.550 MHz
	Offset-2 Stop Freq	12.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 5MHz BW) LTE TDD Downlink (CategoryA < 1GHz 5MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 10MHz BW) LTE TDD Downlink (CategoryA < 1GHz 10MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	5.050 MHz
	Offset-2 Start Freq	10.050 MHz
	Offset-1 Stop Freq	10.050 MHz
	Offset-2 Stop Freq	15.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 10MHz BW) LTE TDD Downlink (CategoryA < 1GHz 10MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 15MHz BW) LTE TDD Downlink (CategoryA < 1GHz 15MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	7.550 MHz
	Offset-2 Start Freq	12.550 MHz
	Offset-1 Stop Freq	12.550 MHz
	Offset-2 Stop Freq	17.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 15MHz BW) LTE TDD Downlink (CategoryA < 1GHz 15MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 20MHz BW) LTE TDD Downlink (CategoryA < 1GHz 20MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10.050 MHz
	Offset-2 Start Freq	15.050 MHz
	Offset-1 Stop Freq	15.050 MHz
	Offset-2 Stop Freq	20.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA < 1GHz 20MHz BW) LTE TDD Downlink (CategoryA < 1GHz 20MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryA > 1GHz 1.4MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	0.750 MHz
	Offset-2 Start Freq	2.150 MHz
	Offset-1 Stop Freq	2.150 MHz
	Offset-2 Stop Freq	3.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryA > 1GHz 1.4MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	0.5 dBm
	Limit-2 ABS1 Start Level	–9.5 dBm
	Limit-1 ABS1 Stop Level	–9.5 dBm
	Limit-2 ABS1 Stop Level	–9.5 dBm
	Limit-1 ABS2 Start Level	0.5 dBm
	Limit-2 ABS2 Start Level	–9.5 dBm
	Limit-1 ABS2 Stop Level	–9.5 dBm
	Limit-2 ABS2 Stop Level	–9.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 3MHz BW) LTE TDD Downlink (CategoryA > 1GHz 3MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.550 MHz
	Offset-2 Start Freq	4.550 MHz
	Offset-1 Stop Freq	4.550 MHz
	Offset-2 Stop Freq	7.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 3MHz BW) LTE TDD Downlink (CategoryA > 1GHz 3MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–3.5 dBm
	Limit-2 ABS1 Start Level	–13.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–13.5 dBm
	Limit-1 ABS2 Start Level	–3.5 dBm
	Limit-2 ABS2 Start Level	–13.5 dBm
	Limit-1 ABS2 Stop Level	–13.5 dBm
	Limit-2 ABS2 Stop Level	–13.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 5MHz BW) LTE TDD Downlink (CategoryA > 1GHz 5MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.550 MHz
	Offset-2 Start Freq	7.550 MHz
	Offset-1 Stop Freq	7.550 MHz
	Offset-2 Stop Freq	12.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 5MHz BW) LTE TDD Downlink (CategoryA > 1GHz 5MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 10MHz BW) LTE TDD Downlink (CategoryA > 1GHz 10MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	5.050 MHz
	Offset-2 Start Freq	10.050 MHz
	Offset-1 Stop Freq	10.050 MHz
	Offset-2 Stop Freq	15.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 10MHz BW) LTE TDD Downlink (CategoryA > 1GHz 10MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 15MHz BW) LTE TDD Downlink (CategoryA > 1GHz 15MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	7.550 MHz
	Offset-2 Start Freq	12.550 MHz
	Offset-1 Stop Freq	12.550 MHz
	Offset-2 Stop Freq	17.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 15MHz BW) LTE TDD Downlink (CategoryA > 1GHz 15MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 20MHz BW) LTE TDD Downlink (CategoryA > 1GHz 20MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10.050 MHz
	Offset-2 Start Freq	15.050 MHz
	Offset-1 Stop Freq	15.050 MHz
	Offset-2 Stop Freq	20.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryA > 1GHz 20MHz BW) LTE TDD Downlink (CategoryA > 1GHz 20MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryB < 1GHz 1.4MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	0.750 MHz
	Offset-2 Start Freq	2.150 MHz
	Offset-1 Stop Freq	2.150 MHz
	Offset-2 Stop Freq	3.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryB < 1GHz 1.4MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	0.5 dBm
	Limit-2 ABS1 Start Level	–9.5 dBm
	Limit-1 ABS1 Stop Level	–9.5 dBm
	Limit-2 ABS1 Stop Level	–9.5 dBm
	Limit-1 ABS2 Start Level	0.5 dBm
	Limit-2 ABS2 Start Level	–9.5 dBm
	Limit-1 ABS2 Stop Level	–9.5 dBm
	Limit-2 ABS2 Stop Level	–9.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 3MHz BW) LTE TDD Downlink (CategoryB < 1GHz 3MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.550 MHz
	Offset-2 Start Freq	4.550 MHz
	Offset-1 Stop Freq	4.550 MHz
	Offset-2 Stop Freq	7.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 3MHz BW) LTE TDD Downlink (CategoryB < 1GHz 3MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–3.5 dBm
	Limit-2 ABS1 Start Level	–13.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–13.5 dBm
	Limit-1 ABS2 Start Level	–3.5 dBm
	Limit-2 ABS2 Start Level	–13.5 dBm
	Limit-1 ABS2 Stop Level	–13.5 dBm
	Limit-2 ABS2 Stop Level	–13.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 5MHz BW) LTE TDD Downlink (CategoryB < 1GHz 5MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.550 MHz
	Offset-2 Start Freq	7.550 MHz
	Offset-1 Stop Freq	7.550 MHz
	Offset-2 Stop Freq	12.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 5MHz BW) LTE TDD Downlink (CategoryB < 1GHz 5MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 10MHz BW) LTE TDD Downlink (CategoryB < 1GHz 10MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	5.050 MHz
	Offset-2 Start Freq	10.050 MHz
	Offset-1 Stop Freq	10.050 MHz
	Offset-2 Stop Freq	15.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 10MHz BW) LTE TDD Downlink (CategoryB < 1GHz 10MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 15MHz BW) LTE TDD Downlink (CategoryB < 1GHz 15MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	7.550 MHz
	Offset-2 Start Freq	12.550 MHz
	Offset-1 Stop Freq	12.550 MHz
	Offset-2 Stop Freq	17.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 15MHz BW) LTE TDD Downlink (CategoryB < 1GHz 15MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 20MHz BW) LTE TDD Downlink (CategoryB < 1GHz 20MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10.050 MHz
	Offset-2 Start Freq	15.050 MHz
	Offset-1 Stop Freq	15.050 MHz
	Offset-2 Stop Freq	20.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB < 1GHz 20MHz BW) LTE TDD Downlink (CategoryB < 1GHz 20MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryB > 1GHz 1.4MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	0.750 MHz
	Offset-2 Start Freq	2.150 MHz
	Offset-1 Stop Freq	2.150 MHz
	Offset-2 Stop Freq	3.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 1.4MHz BW) LTE TDD Downlink (CategoryB > 1GHz 1.4MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	0.5 dBm
	Limit-2 ABS1 Start Level	–9.5 dBm
	Limit-1 ABS1 Stop Level	–9.5 dBm
	Limit-2 ABS1 Stop Level	–9.5 dBm
	Limit-1 ABS2 Start Level	0.5 dBm
	Limit-2 ABS2 Start Level	–9.5 dBm
	Limit-1 ABS2 Stop Level	–9.5 dBm
	Limit-2 ABS2 Stop Level	–9.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 3MHz BW) LTE TDD Downlink (CategoryB > 1GHz 3MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.550 MHz
	Offset-2 Start Freq	4.550 MHz
	Offset-1 Stop Freq	4.550 MHz
	Offset-2 Stop Freq	7.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 3MHz BW) LTE TDD Downlink (CategoryB > 1GHz 3MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–3.5 dBm
	Limit-2 ABS1 Start Level	–13.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–13.5 dBm
	Limit-1 ABS2 Start Level	–3.5 dBm
	Limit-2 ABS2 Start Level	–13.5 dBm
	Limit-1 ABS2 Stop Level	–13.5 dBm
	Limit-2 ABS2 Stop Level	–13.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 5MHz BW) LTE TDD Downlink (CategoryB > 1GHz 5MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.550 MHz
	Offset-2 Start Freq	7.550 MHz
	Offset-1 Stop Freq	7.550 MHz
	Offset-2 Stop Freq	12.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 5MHz BW) LTE TDD Downlink (CategoryB > 1GHz 5MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 10MHz BW) LTE TDD Downlink (CategoryB > 1GHz 10MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	5.050 MHz
	Offset-2 Start Freq	10.050 MHz
	Offset-1 Stop Freq	10.050 MHz
	Offset-2 Stop Freq	15.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 10MHz BW) LTE TDD Downlink (CategoryB > 1GHz 10MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 15MHz BW) LTE TDD Downlink (CategoryB > 1GHz 15MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	7.550 MHz
	Offset-2 Start Freq	12.550 MHz
	Offset-1 Stop Freq	12.550 MHz
	Offset-2 Stop Freq	17.550 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 15MHz BW) LTE TDD Downlink (CategoryB > 1GHz 15MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-3　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 20MHz BW) LTE TDD Downlink (CategoryB > 1GHz 20MHz BW)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10.050 MHz
	Offset-2 Start Freq	15.050 MHz
	Offset-1 Stop Freq	15.050 MHz
	Offset-2 Stop Freq	20.050 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-3 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Downlink (CategoryB > 1GHz 20MHz BW) LTE TDD Downlink (CategoryB > 1GHz 20MHz BW)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–5.5 dBm
	Limit-2 ABS1 Start Level	–12.5 dBm
	Limit-1 ABS1 Stop Level	–12.5 dBm
	Limit-2 ABS1 Stop Level	–12.5 dBm
	Limit-1 ABS2 Start Level	–5.5 dBm
	Limit-2 ABS2 Start Level	–12.5 dBm
	Limit-1 ABS2 Stop Level	–12.5 dBm
	Limit-2 ABS2 Stop Level	–12.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	Off
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

LTE/LTE TDD Uplink

表C.5-4　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
LTE Uplink (General 1.4MHz) LTE TDD Uplink (General 1.4MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	0.715 MHz
	Offset-2 Start Freq	2.2 MHz
	Offset-3 Start Freq	3.699700 MHz
	Offset-1 Stop Freq	1.685 MHz
	Offset-2 Stop Freq	2.7 MHz
	Offset-3 Stop Freq	3.7 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	10 ms
	Offset-3 Sweep Time	10 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	11
	Offset-3 Trace Point	11
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 1.4MHz) LTE TDD Uplink (General 1.4MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–8.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–8.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 3MHz) LTE TDD Uplink (General 3MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.515 MHz
	Offset-2 Start Freq	3 MHz
	Offset-3 Start Freq	6.699700 MHz
	Offset-1 Stop Freq	2.485 MHz
	Offset-2 Stop Freq	6 MHz
	Offset-3 Stop Freq	7 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	10 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	11
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 3MHz) LTE TDD Uplink (General 3MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–11.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–11.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 5MHz) LTE TDD Uplink (General 5MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	100 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	4 MHz
	Offset-3 Start Freq	7.9997 MHz
	Offset-1 Stop Freq	3.485 MHz
	Offset-2 Stop Freq	7 MHz
	Offset-3 Stop Freq	8 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	10 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	11
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 5MHz) LTE TDD Uplink (General 5MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 10MHz) LTE TDD Uplink (General 10MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	300 kHz
	Sweep Time	400 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	401
	Filter Type	Rect
	Offset-1 Start Freq	5.015 MHz
	Offset-2 Start Freq	6 5 MHz
	Offset-3 Start Freq	10.5 MHz
	Offset-1 Stop Freq	5.985 MHz
	Offset-2 Stop Freq	9.5 MHz
	Offset-3 Stop Freq	14.5 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 10MHz) LTE TDD Uplink (General 10MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–16.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-1 ABS1 Stop Level	–16.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 15MHz) LTE TDD Uplink (General 15MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	300 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	7.515 MHz
	Offset-2 Start Freq	9 MHz
	Offset-3 Start Freq	13 MHz
	Offset-1 Stop Freq	8.485 MHz
	Offset-2 Stop Freq	12 MHz
	Offset-3 Stop Freq	22 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	100 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	101
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 15MHz) LTE TDD Uplink (General 15MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–18.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-1 ABS1 Stop Level	–18.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 20MHz) LTE TDD Uplink (General 20MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	300 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10.015 MHz
	Offset-2 Start Freq	11.5 MHz
	Offset-3 Start Freq	15.5 MHz
	Offset-1 Stop Freq	10.985 MHz
	Offset-2 Stop Freq	14.5 MHz
	Offset-3 Stop Freq	29.5 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	200 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	201
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (General 20MHz) LTE TDD Uplink (General 20MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–19.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-1 ABS1 Stop Level	–19.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 1.4MHz) LTE TDD Uplink (NS-03 1.4MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	0.715 MHz
	Offset-2 Start Freq	2.2 MHz
	Offset-3 Start Freq	3.7 MHz
	Offset-1 Stop Freq	1.685 MHz
	Offset-2 Stop Freq	2.7 MHz
	Offset-3 Stop Freq	5.2 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	10 ms
	Offset-3 Sweep Time	20 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	11
	Offset-3 Trace Point	21
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 1.4MHz) LTE TDD Uplink (NS-03 1.4MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–8.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–8.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 3MHz) LTE TDD Uplink (NS-03 3MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.515 MHz
	Offset-2 Start Freq	3 MHz
	Offset-3 Start Freq	6.699700 MHz
	Offset-1 Stop Freq	2.485 MHz
	Offset-2 Stop Freq	6 MHz
	Offset-3 Stop Freq	7 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	100 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	10 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	41
	Offset-3 Trace Point	11
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 3MHz) LTE TDD Uplink (NS-03 3MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–11.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–11.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 5MHz) LTE TDD Uplink (NS-03 5MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	100 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	4 MHz
	Offset-3 Start Freq	7.9997 MHz
	Offset-1 Stop Freq	3.485 MHz
	Offset-2 Stop Freq	7 MHz
	Offset-3 Stop Freq	8 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	10 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	11
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 5MHz) LTE TDD Uplink (NS-03 5MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–11.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–11.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 10MHz) LTE TDD Uplink (NS-03 10MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	300 kHz
	Sweep Time	400 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	401
	Filter Type	Rect
	Offset-1 Start Freq	5.015 MHz
	Offset-2 Start Freq	6 5 MHz
	Offset-3 Start Freq	15.5 MHz
	Offset-1 Stop Freq	5.985 MHz
	Offset-2 Stop Freq	14.5 MHz
	Offset-3 Stop Freq	19.5 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	100 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	101
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 10MHz) LTE TDD Uplink (NS-03 10MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–16.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–16.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 15MHz) LTE TDD Uplink (NS-03 15MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	300 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	7.515 MHz
	Offset-2 Start Freq	9 MHz
	Offset-3 Start Freq	23 MHz
	Offset-1 Stop Freq	8.485 MHz
	Offset-2 Stop Freq	22 MHz
	Offset-3 Stop Freq	27 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	200 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	201
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 15MHz) LTE TDD Uplink (NS-03 15MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–18.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–18.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 20MHz) LTE TDD Uplink (NS-03 20MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	300 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10.015 MHz
	Offset-2 Start Freq	11.5 MHz
	Offset-3 Start Freq	30.5 MHz
	Offset-1 Stop Freq	10.985 MHz
	Offset-2 Stop Freq	29.5 MHz
	Offset-3 Stop Freq	34.5 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	200 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	201
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-03 20MHz) LTE TDD Uplink (NS-03 20MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–19.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–19.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 1.4MHz) LTE TDD Uplink (NS-04 1.4MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	0.715 MHz
	Offset-2 Start Freq	2.2 MHz
	Offset-3 Start Freq	3.7 MHz
	Offset-1 Stop Freq	1.685 MHz
	Offset-2 Stop Freq	2.7 MHz
	Offset-3 Stop Freq	5.2 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	10 ms
	Offset-3 Sweep Time	20 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	11
	Offset-3 Trace Point	21
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 1.4MHz) LTE TDD Uplink (NS-04 1.4MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–8.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–8.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 3MHz) LTE TDD Uplink (NS-04 3MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.515 MHz
	Offset-2 Start Freq	3 MHz
	Offset-3 Start Freq	6.699700 MHz
	Offset-1 Stop Freq	2.485 MHz
	Offset-2 Stop Freq	6 MHz
	Offset-3 Stop Freq	7 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	10 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	11
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 3MHz) LTE TDD Uplink (NS-04 3MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–11.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–11.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 5MHz) LTE TDD Uplink (NS-04 5MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	100 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	4 MHz
	Offset-3 Start Freq	8 MHz
	Offset-1 Stop Freq	3.485 MHz
	Offset-2 Stop Freq	7 MHz
	Offset-3 Stop Freq	12 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	40 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	41
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 5MHz) LTE TDD Uplink (NS-04 5MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 10MHz) LTE TDD Uplink (NS-04 10MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	300 kHz
	Sweep Time	400 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	401
	Filter Type	Rect
	Offset-1 Start Freq	5.015 MHz
	Offset-2 Start Freq	6 5 MHz
	Offset-3 Start Freq	10.5 MHz
	Offset-1 Stop Freq	5.985 MHz
	Offset-2 Stop Freq	9.5 MHz
	Offset-3 Stop Freq	19.5 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	100 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	101
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 10MHz) LTE TDD Uplink (NS-04 10MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–16.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–16.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 15MHz) LTE TDD Uplink (NS-04 15MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	300 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	7.515 MHz
	Offset-2 Start Freq	9 MHz
	Offset-3 Start Freq	13 MHz
	Offset-1 Stop Freq	8.485 MHz
	Offset-2 Stop Freq	12 MHz
	Offset-3 Stop Freq	27 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	200 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	201
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 15MHz) LTE TDD Uplink (NS-04 15MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–18.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–18.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 20MHz) LTE TDD Uplink (NS-04 20MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	300 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10.015 MHz
	Offset-2 Start Freq	11.5 MHz
	Offset-3 Start Freq	15.5 MHz
	Offset-1 Stop Freq	10.985 MHz
	Offset-2 Stop Freq	14.5 MHz
	Offset-3 Stop Freq	34.5 MHz
	Offset-1/2/3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	200 ms
	Offset-3 Sweep Time	40 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	201
	Offset-3 Trace Point	41
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-04 20MHz) LTE TDD Uplink (NS-04 20MHz) (続き)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–19.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–19.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	Off
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 1.4MHz) LTE TDD Uplink (NS-06/07 1.4MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.4 MHz
	RBW	30 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	0.715 MHz
	Offset-2 Start Freq	0.850 MHz
	Offset-3 Start Freq	2.2 MHz
	Offset-4 Start Freq	3.7 MHz
	Offset-1 Stop Freq	0.785 MHz
	Offset-2 Stop Freq	1.65 MHz
	Offset-3 Stop Freq	2.7 MHz
	Offset-4 Stop Freq	5.2 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	100 ms
	Offset-3 Sweep Time	50 ms
	Offset-4 Sweep Time	200 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	101
	Offset-3 Trace Point	51
	Offset-4 Trace Point	201

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 1.4MHz) LTE TDD Uplink (NS-06/07 1.4MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–11.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–11.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 3MHz) LTE TDD Uplink (NS-06/07 3MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3 MHz
	RBW	30 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.515 MHz
	Offset-2 Start Freq	1.650 MHz
	Offset-3 Start Freq	3 MHz
	Offset-4 Start Freq	6.9997 MHz
	Offset-1 Stop Freq	1.585 MHz
	Offset-2 Stop Freq	2.45 MHz
	Offset-3 Stop Freq	6 MHz
	Offset-4 Stop Freq	7 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	100 ms
	Offset-3 Sweep Time	40 ms
	Offset-4 Sweep Time	10 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	101
	Offset-3 Trace Point	41
	Offset-4 Trace Point	11

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 3MHz) LTE TDD Uplink (NS-06/07 3MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–11.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–11.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 5MHz) LTE TDD Uplink (NS-06/07 5MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	100 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	2.515 MHz
	Offset-2 Start Freq	2.650 MHz
	Offset-3 Start Freq	4 MHz
	Offset-4 Start Freq	9 MHz
	Offset-1 Stop Freq	2.585 MHz
	Offset-2 Stop Freq	3.45 MHz
	Offset-3 Stop Freq	8 MHz
	Offset-4 Stop Freq	12 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	100 ms
	Offset-3 Sweep Time	40 ms
	Offset-4 Sweep Time	40 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	101
	Offset-3 Trace Point	41
	Offset-4 Trace Point	41

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 5MHz) LTE TDD Uplink (NS-06/07 5MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 10MHz) LTE TDD Uplink (NS-06/07 10MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	300 kHz
	Sweep Time	400 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	401
	Filter Type	Rect
	Offset-1 Start Freq	5.015 MHz
	Offset-2 Start Freq	5.150 MHz
	Offset-3 Start Freq	6.5 MHz
	Offset-4 Start Freq	15.5 MHz
	Offset-1 Stop Freq	5.085 MHz
	Offset-2 Stop Freq	5.950 MHz
	Offset-3 Stop Freq	14.5 MHz
	Offset-4 Stop Freq	19.5 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	100 ms
	Offset-3 Sweep Time	100 ms
	Offset-4 Sweep Time	40 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	41

表C.5-4 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (NS-06/07 10MHz) LTE TDD Uplink (NS-06/07 10MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–16.5 dBm
	Limit-2 ABS1 Start Level	–11.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–16.5 dBm
	Limit-2 ABS1 Stop Level	–11.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 5MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5 MHz
	RBW	100 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	2.5 MHz
	Offset-2 Start Freq	3.5. MHz
	Offset-3 Start Freq	7.5 MHz
	Offset-4 Start Freq	8.5 MHz
	Offset-1 Stop Freq	3.5 MHz
	Offset-2 Stop Freq	7.5 MHz
	Offset-3 Stop Freq	8.5 MHz
	Offset-4 Stop Freq	12.5 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	400 ms
	Offset-3 Sweep Time	400 ms
	Offset-4 Sweep Time	400 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	401
	Offset-3 Trace Point	401
	Offset-4 Trace Point	401

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 5MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–13.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 10MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	10 MHz
	RBW	300 kHz
	Sweep Time	400 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	401
	Filter Type	Rect
	Offset-1 Start Freq	5 MHz
	Offset-2 Start Freq	6 MHz
	Offset-3 Start Freq	10 MHz
	Offset-4 Start Freq	15 MHz
	Offset-1 Stop Freq	6 MHz
	Offset-2 Stop Freq	10 MHz
	Offset-3 Stop Freq	15 MHz
	Offset-4 Stop Freq	20 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	400 ms
	Offset-3 Sweep Time	400 ms
	Offset-4 Sweep Time	400 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	401
	Offset-3 Trace Point	401
	Offset-4 Trace Point	401

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 10MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–16.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–16.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 15MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	15 MHz
	RBW	300 kHz
	Sweep Time	500 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	501
	Filter Type	Rect
	Offset-1 Start Freq	7.5 MHz
	Offset-2 Start Freq	8.5 MHz
	Offset-3 Start Freq	12.5 MHz
	Offset-4 Start Freq	22.5 MHz
	Offset-1 Stop Freq	8.5 MHz
	Offset-2 Stop Freq	12.5 MHz
	Offset-3 Stop Freq	22.5 MHz
	Offset-4 Stop Freq	27.5 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	400 ms
	Offset-3 Sweep Time	400 ms
	Offset-4 Sweep Time	400 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	401
	Offset-3 Trace Point	401
	Offset-4 Trace Point	401

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 15MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–18.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–18.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

表C.5-4　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 20MHz)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	300 kHz
	Sweep Time	1000 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	15 MHz
	Offset-4 Start Freq	30 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	15 MHz
	Offset-3 Stop Freq	30 MHz
	Offset-4 Stop Freq	35 MHz
	Offset-1/2/3/4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	400 ms
	Offset-2 Sweep Time	400 ms
	Offset-3 Sweep Time	400 ms
	Offset-4 Sweep Time	400 ms
	Offset-1/2/3/4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	401
	Offset-2 Trace Point	401
	Offset-3 Trace Point	401
	Offset-4 Trace Point	401

表C.5-4 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
LTE Uplink (JAPAN 20MHz) (続き)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–19.5 dBm
	Limit-2 ABS1 Start Level	–8.5 dBm
	Limit-3 ABS1 Start Level	–11.5 dBm
	Limit-4 ABS1 Start Level	–23.5 dBm
	Limit-1 ABS1 Stop Level	–19.5 dBm
	Limit-2 ABS1 Stop Level	–8.5 dBm
	Limit-3 ABS1 Stop Level	–11.5 dBm
	Limit-4 ABS1 Stop Level	–23.5 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	Off
	Limit-6 Fail Logic	Off

TD-SCDMA

表C.5-5　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TD-SCDMA DL Trace Point Tune (34dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	136 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	201
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	28 ms
	Offset-2 Sweep Time	136 ms
	Offset-3 Sweep Time	69 ms
	Offset-4 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA DL Trace Point Tune (34dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	41
	Offset-2 Trace Point	201
	Offset-3 Trace Point	101
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 ABS1 Start Level	–20.0 dBm
	Limit-2 ABS1 Start Level	–20.0 dBm
	Limit-3 ABS1 Start Level	–28.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-1 ABS1 Stop Level	–20.0 dBm
	Limit-2 ABS1 Stop Level	–28.0 dBm
	Limit-3 ABS1 Stop Level	–28.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA DL Trace Point Tune (26dBm≦ P < 34dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	136 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	201
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	28 ms
	Offset-2 Sweep Time	136 ms
	Offset-3 Sweep Time	69 ms
	Offset-4 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA DL Trace Point Tune (26dBm≦ P < 34dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	41
	Offset-2 Trace Point	201
	Offset-3 Trace Point	101
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	–54.0 dB
	Limit-2 REL Start Level	–54.0 dB
	Limit-3 REL Start Level	–62.0 dB
	Limit-4 REL Start Level	–47.0 dB
	Limit-1 REL Stop Level	–54.0 dB
	Limit-2 REL Stop Level	–62.0 dB
	Limit-3 REL Stop Level	–62.0 dB
	Limit-4 REL Stop Level	–47.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA DL Trace Point Tune (P < 26dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	136 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	201
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	28 ms
	Offset-2 Sweep Time	136 ms
	Offset-3 Sweep Time	69 ms
	Offset-4 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA DL Trace Point Tune (P < 26dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	41
	Offset-2 Trace Point	201
	Offset-3 Trace Point	101
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 ABS1 Start Level	–28.0 dBm
	Limit-2 ABS1 Start Level	–28.0 dBm
	Limit-3 ABS1 Start Level	–36.0 dBm
	Limit-4 ABS1 Start Level	–21.0 dBm
	Limit-1 ABS1 Stop Level	–28.0 dBm
	Limit-2 ABS1 Stop Level	–36.0 dBm
	Limit-3 ABS1 Stop Level	–36.0 dBm
	Limit-4 ABS1 Stop Level	–21.0 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA UL Trace Point Tune (–53.5dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	136 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	201
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.815 MHz
	Offset-3 Start Freq	2.4 MHz
	Offset-1 Stop Freq	1.815 MHz
	Offset-2 Stop Freq	2.4 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-1 Sweep Time	136 ms
	Offset-2 Sweep Time	69 ms
	Offset-3 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA UL Trace Point Tune (–53.5dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	201
	Offset-2 Trace Point	101
	Offset-3 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Limit-1 REL Start Level	–33.5 dB
	Limit-2 REL Start Level	–47.5 dB
	Limit-3 REL Start Level	–42.5 dB
	Limit-1 REL Stop Level	–47.5 dB
	Limit-2 REL Stop Level	–64.5 dB
	Limit-3 REL Stop Level	–42.5 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA UL Trace Point Tune (–55dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	136 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	201
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.815 MHz
	Offset-3 Start Freq	2.4 MHz
	Offset-1 Stop Freq	1.815 MHz
	Offset-2 Stop Freq	2.4 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-1 Sweep Time	136 ms
	Offset-2 Sweep Time	69 ms
	Offset-3 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA UL Trace Point Tune (–55dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	201
	Offset-2 Trace Point	101
	Offset-3 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Limit-1 REL Start Level	–35.0 dB
	Limit-2 REL Start Level	–49.0 dB
	Limit-3 REL Start Level	–44.0 dB
	Limit-1 REL Stop Level	–49.0 dB
	Limit-2 REL Stop Level	–66.0 dB
	Limit-3 REL Stop Level	–44.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Actual (34dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	676 ms
	Offset-2 Sweep Time	676 ms
	Offset-3 Sweep Time	676 ms
	Offset-4 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Actual (34dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 ABS1 Start Level	–20.0 dBm
	Limit-2 ABS1 Start Level	–20.0 dBm
	Limit-3 ABS1 Start Level	–28.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-1 ABS1 Stop Level	–20.0 dBm
	Limit-2 ABS1 Stop Level	–28.0 dBm
	Limit-3 ABS1 Stop Level	–28.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Actual (26dBm≦ P < 34dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	676 ms
	Offset-2 Sweep Time	676 ms
	Offset-3 Sweep Time	676 ms
	Offset-4 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Actual (26dBm≦ P < 34dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	–54.0 dB
	Limit-2 REL Start Level	–54.0 dB
	Limit-3 REL Start Level	–62.0 dB
	Limit-4 REL Start Level	–47.0 dB
	Limit-1 REL Stop Level	–54.0 dB
	Limit-2 REL Stop Level	–62.0 dB
	Limit-3 REL Stop Level	–62.0 dB
	Limit-4 REL Stop Level	–47.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Actual (P < 26dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	676 ms
	Offset-2 Sweep Time	676 ms
	Offset-3 Sweep Time	676 ms
	Offset-4 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Actual (P < 26dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 ABS1 Start Level	–28.0 dBm
	Limit-2 ABS1 Start Level	–28.0 dBm
	Limit-3 ABS1 Start Level	–36.0 dBm
	Limit-4 ABS1 Start Level	–21.0 dBm
	Limit-1 ABS1 Stop Level	–28.0 dBm
	Limit-2 ABS1 Stop Level	–36.0 dBm
	Limit-3 ABS1 Stop Level	–36.0 dBm
	Limit-4 ABS1 Stop Level	–21.0 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Actual (–53.5dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.815 MHz
	Offset-3 Start Freq	2.4 MHz
	Offset-1 Stop Freq	1.815 MHz
	Offset-2 Stop Freq	2.4 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-1 Sweep Time	676 ms
	Offset-2 Sweep Time	676 ms
	Offset-3 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Actual (–53.5dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Limit-1 REL Start Level	–33.5 dB
	Limit-2 REL Start Level	–47.5 dB
	Limit-3 REL Start Level	–42.5 dB
	Limit-1 REL Stop Level	–47.5 dB
	Limit-2 REL Stop Level	–64.5 dB
	Limit-3 REL Stop Level	–42.5 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Actual (–55dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time Switch	Manual
	Sweep Time Freq. Domain	676 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.815 MHz
	Offset-3 Start Freq	2.4 MHz
	Offset-1 Stop Freq	1.815 MHz
	Offset-2 Stop Freq	2.4 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-1 Sweep Time	676 ms
	Offset-2 Sweep Time	676 ms
	Offset-3 Sweep Time	676 ms

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Actual (–55dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Limit-1 REL Start Level	–35.0 dB
	Limit-2 REL Start Level	–49.0 dB
	Limit-3 REL Start Level	–44.0 dB
	Limit-1 REL Stop Level	–49.0 dB
	Limit-2 REL Stop Level	–66.0 dB
	Limit-3 REL Stop Level	–44.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Fast (34dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Fast (34dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 ABS1 Start Level	–20.0 dBm
	Limit-2 ABS1 Start Level	–20.0 dBm
	Limit-3 ABS1 Start Level	–28.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-1 ABS1 Stop Level	–20.0 dBm
	Limit-2 ABS1 Stop Level	–28.0 dBm
	Limit-3 ABS1 Stop Level	–28.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Fast (26dBm≦ P < 34dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-5 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Fast (26dBm≦ P < 34dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	–54.0 dB
	Limit-2 REL Start Level	–54.0 dB
	Limit-3 REL Start Level	–62.0 dB
	Limit-4 REL Start Level	–47.0 dB
	Limit-1 REL Stop Level	–54.0 dB
	Limit-2 REL Stop Level	–62.0 dB
	Limit-3 REL Stop Level	–62.0 dB
	Limit-4 REL Stop Level	–47.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Fast (P < 26dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.015 MHz
	Offset-3 Start Freq	1.815 MHz
	Offset-4 Start Freq	2.3 MHz
	Offset-1 Stop Freq	1.015 MHz
	Offset-2 Stop Freq	1.815 MHz
	Offset-3 Stop Freq	2.3 MHz
	Offset-4 Stop Freq	4 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-5 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Downlink Fast (P < 26dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 ABS1 Start Level	–28.0 dBm
	Limit-2 ABS1 Start Level	–28.0 dBm
	Limit-3 ABS1 Start Level	–36.0 dBm
	Limit-4 ABS1 Start Level	–21.0 dBm
	Limit-1 ABS1 Stop Level	–28.0 dBm
	Limit-2 ABS1 Stop Level	–36.0 dBm
	Limit-3 ABS1 Stop Level	–36.0 dBm
	Limit-4 ABS1 Stop Level	–21.0 dBm
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Fast (–53.5dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.815 MHz
	Offset-3 Start Freq	2.4 MHz
	Offset-1 Stop Freq	1.815 MHz
	Offset-2 Stop Freq	2.4 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Fast (–53.5dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Limit-1 REL Start Level	–33.5 dB
	Limit-2 REL Start Level	–47.5 dB
	Limit-3 REL Start Level	–42.5 dB
	Limit-1 REL Stop Level	–47.5 dB
	Limit-2 REL Stop Level	–64.5 dB
	Limit-3 REL Stop Level	–42.5 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

表C.5-5　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Fast (–55dBm≦P)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.6 MHz
	RBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	815 kHz
	Offset-2 Start Freq	1.815 MHz
	Offset-3 Start Freq	2.4 MHz
	Offset-1 Stop Freq	1.815 MHz
	Offset-2 Stop Freq	2.4 MHz
	Offset-3 Stop Freq	4.0 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto

表C.5-5 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TD-SCDMA Uplink Fast (–55dBm≦P)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	1 MHz
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Limit-1 REL Start Level	–35.0 dB
	Limit-2 REL Start Level	–49.0 dB
	Limit-3 REL Start Level	–44.0 dB
	Limit-1 REL Stop Level	–49.0 dB
	Limit-2 REL Stop Level	–66.0 dB
	Limit-3 REL Stop Level	–44.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

XG-PHS

表C.5-6　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
XG-PHS 10MHz BW BS	Frequency Span	50 MHz
	RBW	30 kHz
	Reference Mode	Channel
	Reference Channel Bandwidth	10 MHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	RMS
	Offset-1 On/Off	Off
	Offset-1 Start Freq-1	5.2 MHz
	Offset-1 Stop Freq-1	14.8 MHz
	Offset-1 RBW Value	30 kHz
	Offset-1 Sweep Time Switch	Manual
	Offset-1 Sweep Time Value	5100 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Integrate BW Switch	Manual
	Offset-1 Integrate BW	1 MHz
	Limit-1 ABS1 Start Level	–10 dBm
	Limit-1 ABS1 Stop Level	–10 dBm
	Limit-1 Fail Logic	ABS1
	Offset-1 Detection	RMS
	Offset-2 On/Off	On
	Offset-2 Start Freq-1	15 MHz
	Offset-2 Stop Freq-1	25 MHz
	Offset-2 RBW Value	1 MHz
	Offset-2 Sweep Time Switch	Manual
	Offset-2 Sweep Time Value	500 ms
	Offset-2 Integrate BW Switch	AUTO
	Limit-2 ABS1 Start Level	–30 dBm
	Limit-2 ABS1 Stop Level	–30 dBm
	Limit-2 Fail Logic	ABS1
	Offset-2 Detection	Positive

注:

XG-PHS 10 MHz BW BS の設定に関しては，バースト時間率は考慮されていません。

表C.5-6 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
XG-PHS 10MHz BW UE	Frequency Span	50 MHz
	RBW	30 kHz
	Reference Mode	Channel
	Reference Channel Bandwidth	10 MHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	RMS
	Offset-1 On/Off	Off
	Offset-1 Start Freq-1	5.2 MHz
	Offset-1 Stop Freq-1	14.8 MHz
	Offset-1 RBW Value	30 kHz
	Offset-1 Sweep Time Switch	Manual
	Offset-1 Sweep Time Value	5100 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Integrate BW Switch	Manual
	Offset-1 Integrate BW	1 MHz
	Limit-1 ABS1 Start Level	–10 dBm
	Limit-1 ABS1 Stop Level	–10 dBm
	Limit-1 Fail Logic	ABS1
	Offset-1 Detection	RMS
	Offset-2 On/Off	On
	Offset-2 Start Freq-1	15 MHz
	Offset-2 Stop Freq-1	20 MHz
	Offset-2 RBW Value	1 MHz
	Offset-2 Sweep Time Switch	Manual
	Offset-2 Sweep Time Value	250 ms
	Offset-2 Integrate BW Switch	AUTO
	Limit-2 ABS1 Start Level	–25 dBm
	Limit-2 ABS1 Stop Level	–30 dBm

表C.5-6　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
XG-PHS 10MHz BW UE	Limit-2 Fail Logic	ABS1
	Offset-2 Detection	Positive
	Offset-3 On/Off	On
	Offset-3 Start Freq-1	20 MHz
	Offset-3 Stop Freq-1	25 MHz
	Offset-3 RBW Value	1 MHz
	Offset-3 Sweep Time Switch	Manual
	Offset-3 Sweep Time Value	250 ms
	Offset-3 Integrate BW Switch	AUTO
	Limit-3 ABS1 Start Level	–30 dBm
	Limit-3 ABS1 Stop Level	–30 dBm
	Limit-3 Fail Logic	ABS1
	Offset-3 Detection	Positive

注:

XG-PHS 10 MHz BW UE の設定に関しては，バースト時間率は考慮されていません。

CDMA2000

表C.5-7　SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (Pout < 28dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	765 kHz
	Offset-2 Start Freq	1.995 MHz
	Offset-3 Start Freq	3.2531 MHz
	Offset-4 Start Freq	4.0005 MHz
	Offset-5 Start Freq	6.405 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	4.015 MHz
	Offset-3 Stop Freq	4.0031 MHz
	Offset-4 Stop Freq	6.4005 MHz
	Offset-5 Stop Freq	16.005 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	100 Hz
	Offset-4 RBW	1 kHz
	Offset-5 RBW	10 kHz

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (Pout < 28dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	10001
	Offset-4 Trace Point	5001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	6.25 kHz
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (Pout < 28dBm)	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–46.0 dBm
	Limit-4 ABS1 Start Level	–36.0 dBm
	Limit-5 ABS1 Start Level	–36.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–46.0 dBm
	Limit-4 ABS1 Stop Level	–36.0 dBm
	Limit-5 ABS1 Stop Level	–36.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–27.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–27.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–55.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-5 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–55.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-5 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	Off

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (28dBm≦Pout < 33dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	765 kHz
	Offset-2 Start Freq	1.995 MHz
	Offset-3 Start Freq	3.2531 MHz
	Offset-4 Start Freq	4.0005 MHz
	Offset-5 Start Freq	6.405 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	4.015 MHz
	Offset-3 Stop Freq	4.0031 MHz
	Offset-4 Stop Freq	6.4005 MHz
	Offset-5 Stop Freq	16.005 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	100 Hz
	Offset-4 RBW	1 kHz
	Offset-5 RBW	10 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (28dBm≦Pout < 33dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	10001
	Offset-4 Trace Point	5001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	6.25 kHz
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (28dBm≦Pout < 33dBm)	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–27.0 dBm
	Limit-3 ABS1 Start Level	–46.0 dBm
	Limit-4 ABS1 Start Level	–36.0 dBm
	Limit-5 ABS1 Start Level	–36.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–27.0 dBm
	Limit-3 ABS1 Stop Level	–46.0 dBm
	Limit-4 ABS1 Stop Level	–36.0 dBm
	Limit-5 ABS1 Stop Level	–36.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–27.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–27.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–55.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-5 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–55.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-5 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	Off

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (Pout ≥ 33dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	765 kHz
	Offset-2 Start Freq	1.995 MHz
	Offset-3 Start Freq	3.2531 MHz
	Offset-4 Start Freq	4.0005 MHz
	Offset-5 Start Freq	6.405 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	4.015 MHz
	Offset-3 Stop Freq	4.0031 MHz
	Offset-4 Stop Freq	6.4005 MHz
	Offset-5 Stop Freq	16.005 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	100 Hz
	Offset-4 RBW	1 kHz
	Offset-5 RBW	10 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (Pout ≥ 33dBm)	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	10001
	Offset-4 Trace Point	5001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	6.25 kHz
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off

表C.5-7 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 0,2,5,7,9,10 (Pout ≥ 33dBm)	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–46.0 dBm
	Limit-4 ABS1 Start Level	–36.0 dBm
	Limit-5 ABS1 Start Level	–36.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–46.0 dBm
	Limit-4 ABS1 Stop Level	–36.0 dBm
	Limit-5 ABS1 Stop Level	–36.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–27.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–27.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–60.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-5 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–60.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-5 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	Off

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout < 28dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.995 MHz
	Offset-4 Start Freq	2.75 MHz
	Offset-5 Start Freq	1.265 MHz
	Offset-6 Start Freq	4.015 MHz
	Offset-1 Stop Freq	1.265 MHz
	Offset-2 Stop Freq	1.995 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	4.5 MHz
	Offset-5 Stop Freq	2.265 MHz
	Offset-6 Stop Freq	16.015 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	30 kHz
	Offset-6 RBW	30 kHz

表C.5-7 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout < 28dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-6 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-6 Trace Point	501
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout < 28dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–9.0 dBm
	Limit-3 ABS1 Start Level	–9.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-5 ABS1 Start Level	–9.0 dBm
	Limit-6 ABS1 Start Level	–30.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–9.0 dBm
	Limit-3 ABS1 Stop Level	–9.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-5 ABS1 Stop Level	–9.0 dBm
	Limit-6 ABS1 Stop Level	–30.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-6 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-6 ABS2 Stop Level	–27.0 dBm

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout < 28dBm)	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–50.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–50.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1 and REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	ABS1

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (28dBm≦Pout < 33dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.995 MHz
	Offset-4 Start Freq	2.75 MHz
	Offset-5 Start Freq	1.265 MHz
	Offset-6 Start Freq	4.015 MHz
	Offset-1 Stop Freq	1.265 MHz
	Offset-2 Stop Freq	1.995 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	4.5 MHz
	Offset-5 Stop Freq	2.265 MHz
	Offset-6 Stop Freq	16.015 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	30 kHz
	Offset-6 RBW	30 kHz

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (28dBm≦Pout < 33dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-6 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-6 Trace Point	501
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (28dBm≦Pout < 33dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–9.0 dBm
	Limit-3 ABS1 Start Level	–22.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-5 ABS1 Start Level	–9.0 dBm
	Limit-6 ABS1 Start Level	–30.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–9.0 dBm
	Limit-3 ABS1 Stop Level	–22.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-5 ABS1 Stop Level	–9.0 dBm
	Limit-6 ABS1 Stop Level	–30.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–9.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-6 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–9.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-6 ABS2 Stop Level	–27.0 dBm

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (28dBm≦Pout < 33dBm)	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–50.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–50.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1 and REL
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	ABS1

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout ≥ 33dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.995 MHz
	Offset-4 Start Freq	2.75 MHz
	Offset-5 Start Freq	1.265 MHz
	Offset-6 Start Freq	4.015 MHz
	Offset-1 Stop Freq	1.265 MHz
	Offset-2 Stop Freq	1.995 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	4.5 MHz
	Offset-5 Stop Freq	2.265 MHz
	Offset-6 Stop Freq	16.015 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	30 kHz
	Offset-6 RBW	30 kHz

表C.5-7 SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout ≥ 33dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-6 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-6 Trace Point	501
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout ≥ 33dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–9.0 dBm
	Limit-3 ABS1 Start Level	–9.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-5 ABS1 Start Level	–9.0 dBm
	Limit-6 ABS1 Start Level	–30.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–9.0 dBm
	Limit-3 ABS1 Stop Level	–9.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-5 ABS1 Stop Level	–9.0 dBm
	Limit-6 ABS1 Stop Level	–30.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-6 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-6 ABS2 Stop Level	–27.0 dBm

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 1,4,8,14,15 (Pout ≥ 33dBm)	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1 and REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	ABS1

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout < 28dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.465 MHz
	Offset-4 Start Freq	1.995 MHz
	Offset-5 Start Freq	2.75 MHz
	Offset-6 Start Freq	4.015 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	1.465 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	2.265 MHz
	Offset-5 Stop Freq	4.5 MHz
	Offset-6 Stop Freq	16.015 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	1 MHz
	Offset-6 RBW	30 kHz

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout < 28dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-6 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-6 Trace Point	501
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout < 28dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–13.0 dBm
	Limit-4 ABS1 Start Level	–9.0 dBm
	Limit-5 ABS1 Start Level	–13.0 dBm
	Limit-6 ABS1 Start Level	–30.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–26.6 dBm
	Limit-4 ABS1 Stop Level	–9.0 dBm
	Limit-5 ABS1 Stop Level	–13.0 dBm
	Limit-6 ABS1 Stop Level	–30.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–22.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-6 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–22.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-6 ABS2 Stop Level	–27.0 dBm

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout < 28dBm)	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–50.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–50.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	ABS1

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (28dBm≦Pout < 33dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.465 MHz
	Offset-4 Start Freq	1.995 MHz
	Offset-5 Start Freq	2.75 MHz
	Offset-6 Start Freq	4.015 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	1.465 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	2.265 MHz
	Offset-5 Stop Freq	4.5 MHz
	Offset-6 Stop Freq	16.015 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	1 MHz
	Offset-6 RBW	30 kHz

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (28dBm≦Pout < 33dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-6 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-6 Trace Point	501
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (28dBm≦Pout < 33dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–13.0 dBm
	Limit-4 ABS1 Start Level	–9.0 dBm
	Limit-5 ABS1 Start Level	–13.0 dBm
	Limit-6 ABS1 Start Level	–30.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–26.6 dBm
	Limit-4 ABS1 Stop Level	–9.0 dBm
	Limit-5 ABS1 Stop Level	–13.0 dBm
	Limit-6 ABS1 Stop Level	–30.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–22.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-6 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–22.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-6 ABS2 Stop Level	–27.0 dBm

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (28dBm≦Pout < 33dBm)	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–50.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–50.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	ABS1

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout ≥ 33dBm)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.465 MHz
	Offset-4 Start Freq	1.995 MHz
	Offset-5 Start Freq	2.75 MHz
	Offset-6 Start Freq	4.015 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	1.465 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	2.265 MHz
	Offset-5 Stop Freq	4.5 MHz
	Offset-6 Stop Freq	16.015 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	1 MHz
	Offset-6 RBW	30 kHz

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout ≥ 33dBm)	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-6 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-6 Trace Point	501
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout ≥ 33dBm)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–13.0 dBm
	Limit-4 ABS1 Start Level	–9.0 dBm
	Limit-5 ABS1 Start Level	–13.0 dBm
	Limit-6 ABS1 Start Level	–30.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–26.6 dBm
	Limit-4 ABS1 Stop Level	–9.0 dBm
	Limit-5 ABS1 Stop Level	–13.0 dBm
	Limit-6 ABS1 Stop Level	–30.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–22.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-6 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–22.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-6 ABS2 Stop Level	–27.0 dBm

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 6 (Pout ≥ 33dBm)	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	ABS1

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 11,12	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	765 kHz
	Offset-2 Start Freq	900 kHz
	Offset-3 Start Freq	1.14 MHz
	Offset-4 Start Freq	1.995 MHz
	Offset-5 Start Freq	4.05 MHz
	Offset-1 Stop Freq	900 kHz
	Offset-2 Stop Freq	1.14 MHz
	Offset-3 Stop Freq	1.995 MHz
	Offset-4 Stop Freq	4.015 MHz
	Offset-5 Stop Freq	6.05 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto

表C.5-7　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 11,12	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off

表C.5-7　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
CDMA2000 Forward Link Band Class 11,12	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–9.0 dBm
	Limit-3 ABS1 Start Level	–9.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-5 ABS1 Start Level	–36.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–9.0 dBm
	Limit-3 ABS1 Stop Level	–9.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-5 ABS1 Stop Level	–36.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–60.0 dB
	Limit-3 REL Start Level	–65.0 dB
	Limit-4 REL Start Level	–75.0 dB
	Limit-5 REL Start Level	–70.0 dB
	Limit-1 REL Stop Level	–60.0 dB
	Limit-2 REL Stop Level	–65.0 dB
	Limit-3 REL Stop Level	–65.0 dB
	Limit-4 REL Stop Level	–75.0 dB
	Limit-5 REL Stop Level	–70.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	ABS1

EV-DO

表C.5-8　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 0,2,5,7,9,10	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	20 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	765 kHz
	Offset-2 Start Freq	1.995 MHz
	Offset-3 Start Freq	3.2531 MHz
	Offset-4 Start Freq	4.0005 MHz
	Offset-5 Start Freq	6.405 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	4.015 MHz
	Offset-3 Stop Freq	4.0031 MHz
	Offset-4 Stop Freq	6.4005 MHz
	Offset-5 Stop Freq	16.005 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	100 Hz
	Offset-4 RBW	1 kHz
	Offset-5 RBW	10 kHz

表C.5-8　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 0,2,5,7,9,10	Offset-1 Sweep Time	20 ms
	Offset-2 Sweep Time	20 ms
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	10001
	Offset-4 Trace Point	5001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	6.25 kHz
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off

表C.5-8 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 0,2,5,7,9,10	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–46.0 dBm
	Limit-4 ABS1 Start Level	–36.0 dBm
	Limit-5 ABS1 Start Level	–36.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–46.0 dBm
	Limit-4 ABS1 Stop Level	–36.0 dBm
	Limit-5 ABS1 Stop Level	–36.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–27.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–27.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–60.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-5 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–60.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-5 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	Off

表C.5-8　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 1,4,14,15	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	20 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.995 MHz
	Offset-4 Start Freq	2.75 MHz
	Offset-5 Start Freq	1.265 MHz
	Offset-1 Stop Freq	1.265 MHz
	Offset-2 Stop Freq	1.995 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	4.5 MHz
	Offset-5 Stop Freq	2.265 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	30 kHz
	Offset-1 Sweep Time	20 ms
	Offset-2 Sweep Time	20 ms
	Offset-3 Sweep Time	20 ms
	Offset-4 Sweep Time	20 ms
	Offset-5 Sweep Time	20 ms

表C.5-8　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
EV-DO	Offset-1 Trace Point	101
Forward Link	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
Band Class	Offset-4 Trace Point	101
1,4,14,15	Offset-5 Trace Point	101
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off

表C.5-8　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–9.0 dBm
	Limit-3 ABS1 Start Level	–13.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-5 ABS1 Start Level	–9.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–9.0 dBm
	Limit-3 ABS1 Stop Level	–13.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-5 ABS1 Stop Level	–9.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–27.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
EV-DO	Limit-1 ABS2 Stop Level	–27.0 dBm
Forward Link	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–27.0 dBm
Band Class	Limit-4 ABS2 Stop Level	–27.0 dBm
1,4,14,15	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–55.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1 and REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1

表C.5-8 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 6,8,13	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	20 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	900 kHz
	Offset-2 Start Freq	1.265 MHz
	Offset-3 Start Freq	1.465 MHz
	Offset-4 Start Freq	1.995 MHz
	Offset-5 Start Freq	2.75 MHz
	Offset-1 Stop Freq	1.995 MHz
	Offset-2 Stop Freq	1.465 MHz
	Offset-3 Stop Freq	2.265 MHz
	Offset-4 Stop Freq	2.265 MHz
	Offset-5 Stop Freq	4.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	1 MHz

表C.5-8　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 6,8,13	Offset-1 Sweep Time	20 ms
	Offset-2 Sweep Time	20 ms
	Offset-3 Sweep Time	20 ms
	Offset-4 Sweep Time	20 ms
	Offset-5 Sweep Time	20 ms
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	101
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off

表C.5-8 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 6,8,13	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–13.0 dBm
	Limit-3 ABS1 Start Level	–13.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-5 ABS1 Start Level	–13.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
	Limit-2 ABS1 Stop Level	–13.0 dBm
	Limit-3 ABS1 Stop Level	–26.6 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
	Limit-5 ABS1 Stop Level	–13.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–45.0 dB
	Limit-3 REL Start Level	–50.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–45.0 dB
	Limit-2 REL Stop Level	–45.0 dB
	Limit-3 REL Stop Level	–50.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	Off

表C.5-8　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 11,12	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	1.23 MHz
	RBW	30 kHz
	VBW	Auto
	Sweep Time	20 ms
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	101
	Filter Type	Rect
	Offset-1 Start Freq	765 kHz
	Offset-2 Start Freq	900 kHz
	Offset-3 Start Freq	1.14 MHz
	Offset-4 Start Freq	1.995 MHz
	Offset-5 Start Freq	4.0005 MHz
	Offset-6 Start Freq	6.405 MHz
	Offset-1 Stop Freq	900 kHz
	Offset-2 Stop Freq	1.14 MHz
	Offset-3 Stop Freq	1.995 MHz
	Offset-4 Stop Freq	4.015 MHz
	Offset-5 Stop Freq	6.4005 MHz
	Offset-6 Stop Freq	16.005 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	1 kHz
	Offset-6 RBW	10 kHz

表C.5-8 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 11,12	Offset-1 Sweep Time	20 ms
	Offset-2 Sweep Time	20 ms
	Offset-3 Sweep Time	20 ms
	Offset-4 Sweep Time	20 ms
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-4 Auto Sweep Time Select	Normal
	Offset-5 Auto Sweep Time Select	Normal
	Offset-6 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	101
	Offset-2 Trace Point	101
	Offset-3 Trace Point	101
	Offset-4 Trace Point	101
	Offset-5 Trace Point	5001
	Offset-6 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto

表C.5-8　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 ABS1 Start Level	–13.0 dBm
	Limit-2 ABS1 Start Level	–9.0 dBm
	Limit-3 ABS1 Start Level	–9.0 dBm
	Limit-4 ABS1 Start Level	–13.0 dBm
	Limit-5 ABS1 Start Level	–36.0 dBm
	Limit-6 ABS1 Start Level	–36.0 dBm
	Limit-1 ABS1 Stop Level	–13.0 dBm
EV-DO	Limit-2 ABS1 Stop Level	–9.0 dBm
Forward Link	Limit-3 ABS1 Stop Level	–9.0 dBm
	Limit-4 ABS1 Stop Level	–13.0 dBm
Band Class 11,12	Limit-5 ABS1 Stop Level	–36.0 dBm
	Limit-6 ABS1 Stop Level	–36.0 dBm
	Limit-1 ABS2 Start Level	–27.0 dBm
	Limit-2 ABS2 Start Level	–27.0 dBm
	Limit-3 ABS2 Start Level	–22.0 dBm
	Limit-4 ABS2 Start Level	–27.0 dBm
	Limit-5 ABS2 Start Level	–27.0 dBm
	Limit-6 ABS2 Start Level	–27.0 dBm
	Limit-1 ABS2 Stop Level	–27.0 dBm
	Limit-2 ABS2 Stop Level	–27.0 dBm
	Limit-3 ABS2 Stop Level	–22.0 dBm
	Limit-4 ABS2 Stop Level	–27.0 dBm
	Limit-5 ABS2 Stop Level	–27.0 dBm
	Limit-6 ABS2 Stop Level	–27.0 dBm

表C.5-8　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
EV-DO Forward Link Band Class 11,12	Limit-1 REL Start Level	–45.0 dB
	Limit-2 REL Start Level	–60.0 dB
	Limit-3 REL Start Level	–65.0 dB
	Limit-4 REL Start Level	–75.0 dB
	Limit-5 REL Start Level	–55.0 dB
	Limit-6 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	–60.0 dB
	Limit-2 REL Stop Level	–65.0 dB
	Limit-3 REL Stop Level	–65.0 dB
	Limit-4 REL Stop Level	–75.0 dB
	Limit-5 REL Stop Level	–55.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	ABS1
	Limit-6 Fail Logic	ABS1

ISDB-Tmm

表C.5-9　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
ISDB-Tmm 14.2MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	14.2 MHz
	RBW	10 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	7.07 MHz
	Offset-2 Start Freq	7.14 MHz
	Offset-3 Start Freq	7.29 MHz
	Offset-4 Start Freq	8.64 MHz
	Offset-1 Stop Freq	7.14 MHz
	Offset-2 Stop Freq	7.29 MHz
	Offset-3 Stop Freq	8.64 MHz
	Offset-4 Stop Freq	35.45 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	10 kHz
	Offset-2 RBW	10 kHz
	Offset-3 RBW	10 kHz
	Offset-4 RBW	10 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz

表C.5-9 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ISDB-Tmm 14.2MHz BW	Offset-1 SweepTime	Auto
	Offset-2 SweepTime	Auto
	Offset-3 SweepTime	Auto
	Offset-4 SweepTime	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 TracePoint	1001
	Offset-2 TracePoint	1001
	Offset-3 TracePoint	1001
	Offset-4 TracePoint	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-2 Integrate BW Switch	Auto
	Offset-3 Integrate BW Switch	Auto
	Offset-4 Integrate BW Switch	Auto
	Limit-1 REL Start Level	–31.5 dB
	Limit-2 REL Start Level	–51.5 dB
	Limit-3 REL Start Level	–58.5 dB
	Limit-4 REL Start Level	–81.5 dB*1
	Limit-1 REL Stop Level	–51.5 dB
	Limit-2 REL Stop Level	–58.5 dB
	Limit-3 REL Stop Level	–81.5 dB*1
	Limit-4 REL Stop Level	–81.5 dB*1
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-9　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ISDB-Tmm 14.2MHz BW (ABS)	Limit Side	Lower*2
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	14.2 MHz
	RBW	10 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	7.07 MHz
	Offset-2 Start Freq	7.14 MHz
	Offset-3 Start Freq	7.29 MHz
	Offset-4 Start Freq	8.64 MHz
	Offset-5 Start Freq	12.21 MHz
	Offset-1 Stop Freq	7.14 MHz
	Offset-2 Stop Freq	7.29 MHz
	Offset-3 Stop Freq	8.64 MHz
	Offset-4 Stop Freq	12.21 MHz
	Offset-5 Stop Freq	35.45 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	10 kHz
	Offset-2 RBW	10 kHz
	Offset-3 RBW	10 kHz
	Offset-4 RBW	10 kHz
	Offset-5 RBW	10 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz

表C.5-9 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ISDB-Tmm 14.2MHz BW (ABS)	Offset-1 SweepTime	Auto
	Offset-2 SweepTime	Auto
	Offset-3 SweepTime	Auto
	Offset-4 SweepTime	Auto
	Offset-5 SweepTime	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-1 TracePoint	1001
	Offset-2 TracePoint	1001
	Offset-3 TracePoint	1001
	Offset-4 TracePoint	1001
	Offset-5 TracePoint	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-2 Integrate BW Switch	Auto
	Offset-3 Integrate BW Switch	Auto
	Offset-4 Integrate BW Switch	Auto
	Offset-5 Integrate BW Switch	Auto
	Limit-1 REL Start Level	–31.5 dB
	Limit-2 REL Start Level	–51.5 dB
	Limit-3 REL Start Level	–58.5 dB
	Limit-4 REL Start Level	–81.5 dB*1
	Limit-5 REL Start Level	–81.5 dB*1
	Limit-1 REL Stop Level	–51.5 dB
	Limit-2 REL Stop Level	–58.5 dB
	Limit-3 REL Stop Level	–81.5 dB*1
	Limit-4 REL Stop Level	–81.5 dB*1
	Limit-5 REL Stop Level	–81.5 dB*1

表C.5-9　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ISDB-Tmm 14.2MHz BW (ABS)	Limit-1 Fail Logic	Off*2
	Limit-2 Fail Logic	Off*2
	Limit-3 Fail Logic	Off*2
	Limit-4 Fail Logic	Off*2
	Limit-5 Fail Logic	ABS1 and REL
	Limit-5 ABS1 Start Level	–32.4 dBm*3
	Limit-5 ABS1 Stop Level	–32.4 dBm*3

＊1　空中線電力が 2.5 × 33/13 W を超える場合の値です。各空中線電力に対する値は下記式より計算することができます(引用:ARIB STD-B46 1.1 版)。空中線電力 P[W] に対して

空中線電力 [W]	設定値 [dB]
P＞2.5 × 33/13	–81.5
2.5 × 33/13≧P＞0.025 × 33/13	– (73.4 + 10log (P))
0.025 × 33/13≧P	–57.4
小数点以下 2 桁目切り下げ。2.5×33/13≒6.35[W], 0.025×33/13≒63.5[mW]	

＊2　相対レベルマスクを同時に測定する場合は Limit Side を Both, Fail Logic を REL に設定します。ただし, この場合 Limit-5 による絶対レベル規格線も左右対称になります。

＊3　空中線電力が 1000/6 [W/MHz] (14.2 MHz 換算で約 2.37 kW)を超える場合の値です。各空中線電力に対する値を下記式より計算することができます(引用:ARIB STD-B46 1.1 版)。

空中線電力 [W/MHz]	202.5 MHz における空中線電力の上限 [dBm]
P＞1000/6	–32.4
1000/6≧P＞100/6	10 log (P) – 55
100/6≧P	–42.4
ここで, P は基本周波数の平均電力 [W/MHz]	

表C.5-9　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ISDB-Tmm (ISDB-T) 5.6MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5.6 MHz
	RBW	10 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.79 MHz
	Offset-2 Start Freq	2.86 MHz
	Offset-3 Start Freq	3.00 MHz
	Offset-4 Start Freq	4.36 MHz
	Offset-1 Stop Freq	2.86 MHz
	Offset-2 Stop Freq	3.00 MHz
	Offset-3 Stop Freq	4.36 MHz
	Offset-4 Stop Freq	15 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	10 kHz
	Offset-2 RBW	10 kHz
	Offset-3 RBW	10 kHz
	Offset-4 RBW	10 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz

表C.5-9　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ISDB-Tmm (ISDB-T) 5.6MHz BW	Offset-1 SweepTime	Auto
	Offset-2 SweepTime	Auto
	Offset-3 SweepTime	Auto
	Offset-4 SweepTime	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 TracePoint	1001
	Offset-2 TracePoint	1001
	Offset-3 TracePoint	1001
	Offset-4 TracePoint	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-2 Integrate BW Switch	Auto
	Offset-3 Integrate BW Switch	Auto
	Offset-4 Integrate BW Switch	Auto
	Limit-1 REL Start Level	–27.4 dB
	Limit-2 REL Start Level	–47.4 dB
	Limit-3 REL Start Level	–54.4 dB
	Limit-4 REL Start Level	–77.4 dB
	Limit-1 REL Stop Level	–47.4 dB
	Limit-2 REL Stop Level	–54.4 dB
	Limit-3 REL Stop Level	–77.4 dB
	Limit-4 REL Stop Level	–77.4 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

ISDB-T

表C.5-10 SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
ISDB-T 5.6MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	5.6 MHz
	RBW	10 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.79 MHz
	Offset-2 Start Freq	2.86 MHz
	Offset-3 Start Freq	3.00 MHz
	Offset-4 Start Freq	4.36 MHz
	Offset-1 Stop Freq	2.86 MHz
	Offset-2 Stop Freq	3.00 MHz
	Offset-3 Stop Freq	4.36 MHz
	Offset-4 Stop Freq	15 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	10 kHz
	Offset-2 RBW	10 kHz
	Offset-3 RBW	10 kHz
	Offset-4 RBW	10 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz

表C.5-10　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ISDB-T 5.6MHz BW	Offset-1 SweepTime	Auto
	Offset-2 SweepTime	Auto
	Offset-3 SweepTime	Auto
	Offset-4 SweepTime	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 TracePoint	1001
	Offset-2 TracePoint	1001
	Offset-3 TracePoint	1001
	Offset-4 TracePoint	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-2 Integrate BW Switch	Auto
	Offset-3 Integrate BW Switch	Auto
	Offset-4 Integrate BW Switch	Auto
	Limit-1 REL Start Level	–27.4 dB
	Limit-2 REL Start Level	–47.4 dB
	Limit-3 REL Start Level	–54.4 dB
	Limit-4 REL Start Level	–77.4 dB
	Limit-1 REL Stop Level	–47.4 dB
	Limit-2 REL Stop Level	–54.4 dB
	Limit-3 REL Stop Level	–77.4 dB
	Limit-4 REL Stop Level	–77.4 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

ISDB-T_{SB}

表C.5-11 SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
ISDB-T_{SB} 3.9MHz BW	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Channel BW	3.9 MHz
	RBW	10 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	1.93 MHz
	Offset-2 Start Freq	2.01 MHz
	Offset-3 Start Freq	2.08 MHz
	Offset-4 Start Freq	3.51 MHz
	Offset-1 Stop Freq	2.01 MHz
	Offset-2 Stop Freq	2.08 MHz
	Offset-3 Stop Freq	3.51 MHz
	Offset-4 Stop Freq	9.74 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	10 kHz
	Offset-2 RBW	10 kHz
	Offset-3 RBW	10 kHz
	Offset-4 RBW	10 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz

表C.5-11　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ISDB-T_{SB} 3.9MHz BW	Offset-1 SweepTime	Auto
	Offset-2 SweepTime	Auto
	Offset-3 SweepTime	Auto
	Offset-4 SweepTime	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 TracePoint	1001
	Offset-2 TracePoint	1001
	Offset-3 TracePoint	1001
	Offset-4 TracePoint	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-2 Integrate BW Switch	Auto
	Offset-3 Integrate BW Switch	Auto
	Offset-4 Integrate BW Switch	Auto
	Limit-1 REL Start Level	–25.9 dB
	Limit-2 REL Start Level	–45.9 dB
	Limit-3 REL Start Level	–55.9 dB
	Limit-4 REL Start Level	–75.9 dB*4
	Limit-1 REL Stop Level	–45.9 dB
	Limit-2 REL Stop Level	–55.9 dB
	Limit-3 REL Stop Level	–75.9 dB*4
	Limit-4 REL Stop Level	–75.9 dB*4
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

＊4: 空中線電力が 5 W を超える場合の値です。各空中線電力に対する値は下記式より計算することができます（引用:ARIB STD-B46 2.0 版)。空中線電力 P[W] に対して

空中線電力 [W]	設定値 [dB]
P>5	–75.9
5≧P>0.5	– (10log(6000/14×9/10)+43+10log (P))
0.5≧P	– (40+10log(6000/14×9/10))
小数点以下 2 桁目切り下げ。	

SEM 802.11a

表C.5-12　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
SEM 802.11a BW_20MHz (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	18 MHz
	RBW	100 kHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	9 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	30 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	30 MHz
	Offset-4 Stop Freq	50 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto

表C.5-12 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11a BW_20MHz (WLAN) (IEEE 802.11-2012)	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

SEM 802.11b

表C.5-13　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
SEM 802.11b DSSS/CCK (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	22 MHz
	RBW	100 kHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	11 MHz
	Offset-2 Start Freq	22 MHz
	Offset-1 Stop Freq	22 MHz
	Offset-2 Stop Freq	30 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-13 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11b DSSS/CCK (WLAN) (IEEE 802.11-2012)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	–30.0 dB
	Limit-2 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	–30.0 dB
	Limit-2 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL

SEM 802.11g

表C.5-14　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
SEM 802.11g OFDM (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	18 MHz
	RBW	100 kHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	9 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	30 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	30 MHz
	Offset-4 Stop Freq	50 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto

表C.5-14 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11g OFDM (WLAN) (IEEE 802.11-2012)	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-14　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11g DSSS/CCK (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	22 MHz
	RBW	100 kHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	11 MHz
	Offset-2 Start Freq	22 MHz
	Offset-1 Stop Freq	22 MHz
	Offset-2 Stop Freq	30 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto

表C.5-14 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11g DSSS/CCK (WLAN) (IEEE 802.11-2012)	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	–30.0 dB
	Limit-2 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	–30.0 dB
	Limit-2 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL

表C.5-14　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11g DSSS-OFDM (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	18 MHz
	RBW	100 kHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	9 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	30 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	30 MHz
	Offset-4 Stop Freq	50 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-14　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11g DSSS-OFDM (WLAN) (IEEE 802.11-2012)	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

SEM 802.11j

表C.5-15　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
SEM 802.11j BW_10MHz (WLAN) (IEEE 802.11-2007)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	9 MHz
	RBW	100 kHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	4.5 MHz
	Offset-2 Start Freq	5.5 MHz
	Offset-3 Start Freq	10 MHz
	Offset-4 Start Freq	15 MHz
	Offset-1 Stop Freq	5.5 MHz
	Offset-2 Stop Freq	10 MHz
	Offset-3 Stop Freq	15 MHz
	Offset-4 Stop Freq	25 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto

表C.5-15 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11j BW_10MHz (WLAN) (IEEE 802.11-2007)	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

SEM 802.11p

表C.5-16　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
SEM 802.11p BW_10MHz (WLAN) (IEEE 802.11-2007)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	9 MHz
	RBW	100 kHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	4.5 MHz
	Offset-2 Start Freq	5.5 MHz
	Offset-3 Start Freq	10 MHz
	Offset-4 Start Freq	15 MHz
	Offset-1 Stop Freq	5.5 MHz
	Offset-2 Stop Freq	10 MHz
	Offset-3 Stop Freq	15 MHz
	Offset-4 Stop Freq	25 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto

表C.5-16　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11p BW_10MHz (WLAN) (IEEE 802.11-2007)	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

SEM 802.11n

表C.5-17　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
SEM 802.11n BW_20MHz (2.4GHz) (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	18 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	9 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	30 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	30 MHz
	Offset-4 Stop Freq	50 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-17　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11n BW_20MHz (2.4GHz) (WLAN) (IEEE 802.11-2012)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–45.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-17　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11n BW_20MHz (5GHz) (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	18 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	9 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	30 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	30 MHz
	Offset-4 Stop Freq	50 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-17　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11n BW_20MHz (5GHz) (WLAN) (IEEE 802.11-2012)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-17　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11n BW_40MHz (2.4GHz) (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	38 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	19 MHz
	Offset-2 Start Freq	21 MHz
	Offset-3 Start Freq	40 MHz
	Offset-4 Start Freq	60 MHz
	Offset-1 Stop Freq	21 MHz
	Offset-2 Stop Freq	40 MHz
	Offset-3 Stop Freq	60 MHz
	Offset-4 Stop Freq	100 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-17　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11n BW_40MHz (2.4GHz) (WLAN) (IEEE 802.11-2012)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–45.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-17　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11n BW_40MHz (5GHz) (WLAN) (IEEE 802.11-2012)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	38 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	19 MHz
	Offset-2 Start Freq	21 MHz
	Offset-3 Start Freq	40 MHz
	Offset-4 Start Freq	60 MHz
	Offset-1 Stop Freq	21 MHz
	Offset-2 Stop Freq	40 MHz
	Offset-3 Stop Freq	60 MHz
	Offset-4 Stop Freq	100 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-17　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11n BW_40MHz (5GHz) (WLAN) (IEEE 802.11-2012)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

SEM 802.11ac

表C.5-18　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
SEM 802.11ac BW_20MHz (WLAN) (IEEE 802.11ac-2013)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	18 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	9 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	30 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	30 MHz
	Offset-4 Stop Freq	50 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-18 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11ac BW_20MHz (WLAN) (IEEE 802.11ac-2013)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-18　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11ac BW_40MHz (WLAN) (IEEE 802.11ac-2013)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	38 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	19 MHz
	Offset-2 Start Freq	21 MHz
	Offset-3 Start Freq	40 MHz
	Offset-4 Start Freq	60 MHz
	Offset-1 Stop Freq	21 MHz
	Offset-2 Stop Freq	40 MHz
	Offset-3 Stop Freq	60 MHz
	Offset-4 Stop Freq	100 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-18 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11ac BW_40MHz (WLAN) (IEEE 802.11ac-2013)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-18　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11ac BW_80MHz (WLAN) (IEEE 802.11ac-2013)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	78 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	39 MHz
	Offset-2 Start Freq	41 MHz
	Offset-3 Start Freq	80 MHz
	Offset-4 Start Freq	120 MHz
	Offset-1 Stop Freq	41 MHz
	Offset-2 Stop Freq	80 MHz
	Offset-3 Stop Freq	120 MHz
	Offset-4 Stop Freq	200 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-18 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11ac BW_80MHz (WLAN) (IEEE 802.11ac-2013)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-18　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11ac BW_160MHz (WLAN) (IEEE 802.11ac-2013)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	158 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	79 MHz
	Offset-2 Start Freq	81 MHz
	Offset-3 Start Freq	160 MHz
	Offset-4 Start Freq	240 MHz
	Offset-1 Stop Freq	81 MHz
	Offset-2 Stop Freq	160 MHz
	Offset-3 Stop Freq	240 MHz
	Offset-4 Stop Freq	400 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-18 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
SEM 802.11ac BW_160MHz (WLAN) (IEEE 802.11ac-2013)	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

ETSI EN 301 893

表C.5-19　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 5MHz (WLAN)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	5 MHz
	RBW	1 MHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	2.375 MHz
	Offset-2 Start Freq	2.750 MHz
	Offset-3 Start Freq	5.0 MHz
	Offset-4 Start Freq	7.5 MHz
	Offset-5 Start Freq	45 MHz
	Offset-6 Start Freq	54 MHz
	Offset-1 Stop Freq	2.750 MHz
	Offset-2 Stop Freq	5.0 MHz
	Offset-3 Stop Freq	7.5 MHz
	Offset-4 Stop Freq	45 MHz
	Offset-5 Stop Freq	54 MHz
	Offset-6 Stop Freq	60 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	1 MHz

表C.5-19 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 5MHz (WLAN)	Offset-6 RBW	1 MHz
	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-5 VBW	30 kHz
	Offset-6 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-19　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 5MHz (WLAN)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-5 REL Start Level	–42.0 dB
	Limit-6 REL Start Level	–47.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-5 REL Stop Level	–42.0 dB
	Limit-6 REL Stop Level	–47.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-19 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 10MHz (WLAN)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	10 MHz
	RBW	1 MHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	4.75 MHz
	Offset-2 Start Freq	5.5 MHz
	Offset-3 Start Freq	10.0 MHz
	Offset-4 Start Freq	15.0 MHz
	Offset-5 Start Freq	90 MHz
	Offset-6 Start Freq	108 MHz
	Offset-1 Stop Freq	5.5 MHz
	Offset-2 Stop Freq	10.0 MHz
	Offset-3 Stop Freq	15.0 MHz
	Offset-4 Stop Freq	90 MHz
	Offset-5 Stop Freq	108 MHz
	Offset-6 Stop Freq	120 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	1 MHz
	Offset-6 RBW	1 MHz

表C.5-19　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 10MHz (WLAN)	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-5 VBW	30 kHz
	Offset-6 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-19　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 10MHz (WLAN)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-5 REL Start Level	–42.0 dB
	Limit-6 REL Start Level	–47.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-5 REL Stop Level	–42.0 dB
	Limit-6 REL Stop Level	–47.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-19　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 20MHz (WLAN)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	20 MHz
	RBW	1 MHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	9.5 MHz
	Offset-2 Start Freq	11.0 MHz
	Offset-3 Start Freq	20.0 MHz
	Offset-4 Start Freq	30.0 MHz
	Offset-5 Start Freq	180 MHz
	Offset-6 Start Freq	216 MHz
	Offset-1 Stop Freq	11.0 MHz
	Offset-2 Stop Freq	20.0 MHz
	Offset-3 Stop Freq	30.0 MHz
	Offset-4 Stop Freq	180 MHz
	Offset-5 Stop Freq	216 MHz
	Offset-6 Stop Freq	240 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	1 MHz
	Offset-6 RBW	1 MHz

表C.5-19　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 20MHz (WLAN)	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-5 VBW	30 kHz
	Offset-6 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-19　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 20MHz (WLAN)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-5 REL Start Level	–42.0 dB
	Limit-6 REL Start Level	–47.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-5 REL Stop Level	–42.0 dB
	Limit-6 REL Stop Level	–47.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-19 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 40MHz (WLAN)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	20 MHz
	RBW	1 MHz
	VBW	30 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	19.0 MHz
	Offset-2 Start Freq	22.0 MHz
	Offset-3 Start Freq	40.0 MHz
	Offset-4 Start Freq	60.0 MHz
	Offset-5 Start Freq	360 MHz
	Offset-6 Start Freq	432 MHz
	Offset-1 Stop Freq	22.0 MHz
	Offset-2 Stop Freq	40.0 MHz
	Offset-3 Stop Freq	60.0 MHz
	Offset-4 Stop Freq	360 MHz
	Offset-5 Stop Freq	432 MHz
	Offset-6 Stop Freq	480 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	1 MHz
	Offset-6 RBW	1 MHz

表C.5-19　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 40MHz (WLAN)	Offset-1 VBW	30 kHz
	Offset-2 VBW	30 kHz
	Offset-3 VBW	30 kHz
	Offset-4 VBW	30 kHz
	Offset-5 VBW	30 kHz
	Offset-6 VBW	30 kHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	RMS
	Offset-2 Detection	RMS
	Offset-3 Detection	RMS
	Offset-4 Detection	RMS
	Offset-5 Detection	RMS
	Offset-6 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-19 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 OFDM 40MHz (WLAN)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-6 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–20.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–40.0 dB
	Limit-5 REL Start Level	–42.0 dB
	Limit-6 REL Start Level	–47.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–40.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-5 REL Stop Level	–42.0 dB
	Limit-6 REL Stop Level	–47.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

O-QPSK

表C.5-20　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
O-QPSK 2450MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	3.5 MHz
	Offset-1 Stop Freq	5.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 REL Start Level	–20.0 dB
	Limit-1 REL Stop Level	–20.0 dB
	Limit-1 Fail Logic	ABS1 and REL
	Limit-1 ABS1 Start Level	–30.0 dBm
	Limit-1 ABS1 Stop Level	–30.0 dBm

BPSK

表C.5-21　SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
BPSK 950MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	400 kHz
	Offset-1 Stop Freq	1.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 Fail Logic	REL
	Limit-1 ABS1 Start Level	–39.0 dBm
	Limit-1 ABS1 Stop Level	–39.0 dBm

GFSK

表C.5-22　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
GFSK 50ksps 950MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	200 kHz
	Offset-1 Stop Freq	1.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 Fail Logic	REL
	Limit-1 ABS1 Start Level	–39.0 dBm
	Limit-1 ABS1 Stop Level	–39.0 dBm

表C.5-22　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
GFSK 100ksps 950MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	300 kHz
	Offset-1 Stop Freq	1.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 Fail Logic	REL
	Limit-1 ABS1 Start Level	–39.0 dBm
	Limit-1 ABS1 Stop Level	–39.0 dBm

表C.5-22　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
GFSK 200ksps 950MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	500 kHz
	Offset-1 Stop Freq	1.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 Fail Logic	REL
	Limit-1 ABS1 Start Level	–39.0 dBm
	Limit-1 ABS1 Stop Level	–39.0 dBm

表C.5-22　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
GFSK 50ksps 920MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	300 kHz
	Offset-1 Stop Freq	1.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 Fail Logic	REL
	Limit-1 ABS1 Start Level	–29.0 dBm
	Limit-1 ABS1 Stop Level	–29.0 dBm

表C.5-22　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
GFSK 100ksps 920MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	400 kHz
	Offset-1 Stop Freq	1.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 Fail Logic	REL
	Limit-1 ABS1 Start Level	–29.0 dBm
	Limit-1 ABS1 Stop Level	–29.0 dBm

表C.5-22　SEM 機能の Standard パラメーター覧（続き）

Standard	パラメータ名	設定値
GFSK 200ksps 920MHz (LR-WPANs)	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	2 MHz
	RBW	100 kHz
	Sweep Time	Auto
	Auto Sweep Time Select	Normal
	Detection	RMS
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	600 kHz
	Offset-1 Stop Freq	1.0 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	RMS
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Limit-1 Fail Logic	REL
	Limit-1 ABS1 Start Level	–29.0 dBm
	Limit-1 ABS1 Stop Level	–29.0 dBm

APCO P25

表C.5-23　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
APCO P25 FCC 12.5kHz	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	11.25kHz
	RBW	30 kHz
	Sweep Time	5.7 s
	Auto Sweep Time Select	Normal
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	5.624 kHz
	Offset-3 Start Freq	12.5 kHz
	Offset-1 Stop Freq	5.624 kHz
	Offset-2 Stop Freq	12.5 kHz
	Offset-3 Stop Freq	25 kHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	100 Hz
	Offset-2 RBW	100 Hz
	Offset-3 RBW	100 Hz
	Offset-1 Sweep Time	2.9 s
	Offset-2 Sweep Time	3.5 s
	Offset-3 Sweep Time	6.3 s
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive

表C.5-23 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
APCO P25 FCC 12.5kHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	0 dBm
	Limit-2 REL Start Level	–19.96 dBm
	Limit-3 REL Start Level	–70 dBm
	Limit-1 REL Stop Level	0 dBm
	Limit-2 REL Stop Level	–69.94 dBm
	Limit-3 REL Stop Level	–70 dBm
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

表C.5-23　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
APCO P25 NTIA 12.5kHz	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Peak
	Channel BW	11.25kHz
	RBW	30 kHz
	Sweep Time	5.7 s
	Auto Sweep Time Select	Normal
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	2.5 kHz
	Offset-3 Start Freq	12.5 kHz
	Offset-1 Stop Freq	2.5 kHz
	Offset-2 Stop Freq	12.5 kHz
	Offset-3 Stop Freq	25 kHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	300 Hz
	Offset-2 RBW	300 Hz
	Offset-3 RBW	300 Hz
	Offset-1 Sweep Time	1.3 s
	Offset-2 Sweep Time	5 s
	Offset-3 Sweep Time	6.3 s
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive

表C.5-23　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
APCO P25 NTIA 12.5kHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Limit-1 REL Start Level	0 dBm
	Limit-2 REL Start Level	0 dBm
	Limit-3 REL Start Level	–70 dBm
	Limit-1 REL Stop Level	0 dBm
	Limit-2 REL Stop Level	–70 dBm
	Limit-3 REL Stop Level	–70 dBm
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

Microlink ETSI CS: 7MHz

表C.5-24　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:2	Frequency Span	35 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	30 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3.4 MHz
	Offset-3 Start Freq	4.2 MHz
	Offset-4 Start Freq	6.8 MHz
	Offset-5 Start Freq	12 MHz
	Offset-1 Stop Freq	3.4 MHz
	Offset-2 Stop Freq	4.2 MHz
	Offset-3 Stop Freq	6.8 MHz
	Offset-4 Stop Freq	12 MHz
	Offset-5 Stop Freq	17.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	30 kHz

表C.5-24　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:2	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On

表C.5-24　SEM 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:2	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–23.0 dB
	Limit-4 REL Start Level	–23.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–23.0 dB
	Limit-3 REL Stop Level	–23.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–23.0 dB
	Limit-3 REL Stop Level	–23.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL

表C.5-24　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:4L Freq Band:3G - 17GHz	Frequency Span	35 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	30 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3.2 MHz
	Offset-3 Start Freq	4.4 MHz
	Offset-4 Start Freq	14 MHz
	Offset-1 Stop Freq	3.2 MHz
	Offset-2 Stop Freq	4.4 MHz
	Offset-3 Stop Freq	14 MHz
	Offset-4 Stop Freq	17.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-24　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:4L Freq Band:3G - 17GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-24　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETS CS:7MHz Class:4L Freq Band:17G - 30GHz	Frequency Span	35 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	30 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3.2 MHz
	Offset-3 Start Freq	4.4 MHz
	Offset-4 Start Freq	12.4 MHz
	Offset-1 Stop Freq	3.2 MHz
	Offset-2 Stop Freq	4.4 MHz
	Offset-3 Stop Freq	12.4 MHz
	Offset-4 Stop Freq	17.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-24　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:4L Freq Band:17G - 30GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–50.0 dB
	Limit-4 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-24　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:4L Freq Band:above 30GHz	Frequency Span	35 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	30 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3.2 MHz
	Offset-3 Start Freq	4.4 MHz
	Offset-4 Start Freq	10.4 MHz
	Offset-1 Stop Freq	3.2 MHz
	Offset-2 Stop Freq	4.4 MHz
	Offset-3 Stop Freq	10.4 MHz
	Offset-4 Stop Freq	17.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-24　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:4L Freq Band:above 30GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–45.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-24 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETS CS:7MHz Class:5B Freq Band:3G - 17GHz	Frequency Span	35 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	30 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3 MHz
	Offset-3 Start Freq	3.625 MHz
	Offset-4 Start Freq	3.875 MHz
	Offset-5 Start Freq	4.25 MHz
	Offset-6 Start Freq	10 MHz
	Offset-7 Start Freq	13.5 MHz
	Offset-1 Stop Freq	3 MHz
	Offset-2 Stop Freq	3.625 MHz
	Offset-3 Stop Freq	3.875 MHz
	Offset-4 Stop Freq	4.25 MHz
	Offset-5 Stop Freq	10 MHz
	Offset-6 Stop Freq	13.5 MHz
	Offset-7 Stop Freq	17.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-24　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:3G - 17GHz	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	30 kHz
	Offset-6 RBW	30 kHz
	Offset-7 RBW	30 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-24 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:3G - 17GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-7 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-24　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:17G - 30GHz	Frequency Span	35 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	30 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3 MHz
	Offset-3 Start Freq	3.625 MHz
	Offset-4 Start Freq	3.875 MHz
	Offset-5 Start Freq	4.25 MHz
	Offset-6 Start Freq	10 MHz
	Offset-7 Start Freq	11.75 MHz
	Offset-1 Stop Freq	3 MHz
	Offset-2 Stop Freq	3.625 MHz
	Offset-3 Stop Freq	3.875 MHz
	Offset-4 Stop Freq	4.25 MHz
	Offset-5 Stop Freq	10 MHz
	Offset-6 Stop Freq	11.75 MHz
	Offset-7 Stop Freq	17.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-24 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:17G - 30GHz	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	30 kHz
	Offset-6 RBW	30 kHz
	Offset-7 RBW	30 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-24　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:17G - 30GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–50.0 dB
	Limit-7 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-24 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:above 30GHz	Frequency Span	35 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	30 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3 MHz
	Offset-3 Start Freq	3.625 MHz
	Offset-4 Start Freq	3.875 MHz
	Offset-5 Start Freq	4.25 MHz
	Offset-6 Start Freq	10 MHz
	Offset-1 Stop Freq	3 MHz
	Offset-2 Stop Freq	3.625 MHz
	Offset-3 Stop Freq	3.875 MHz
	Offset-4 Stop Freq	4.25 MHz
	Offset-5 Stop Freq	10 MHz
	Offset-6 Stop Freq	17.5 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	30 kHz
	Offset-2 RBW	30 kHz
	Offset-3 RBW	30 kHz
	Offset-4 RBW	30 kHz
	Offset-5 RBW	30 kHz
	Offset-6 RBW	30 kHz

表C.5-24　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:above 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-24 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:7MHz Class:5B Freq Band:above 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

Microlink ETSI CS: 14MHz

表C.5-25　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:2	Frequency Span	70 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	6.8 MHz
	Offset-3 Start Freq	8.4 MHz
	Offset-4 Start Freq	13.6 MHz
	Offset-5 Start Freq	24 MHz
	Offset-1 Stop Freq	6.8 MHz
	Offset-2 Stop Freq	8.4 MHz
	Offset-3 Stop Freq	13.6 MHz
	Offset-4 Stop Freq	24 MHz
	Offset-5 Stop Freq	35 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz

表C.5-25　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:2	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On

表C.5-25　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:2	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–23.0 dB
	Limit-4 REL Start Level	–23.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–23.0 dB
	Limit-3 REL Stop Level	–23.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL

表C.5-25　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:4L Freq Band:3G - 17GHz	Frequency Span	70 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	6.4 MHz
	Offset-3 Start Freq	8.8 MHz
	Offset-4 Start Freq	28 MHz
	Offset-1 Stop Freq	6.4 MHz
	Offset-2 Stop Freq	8.8 MHz
	Offset-3 Stop Freq	28 MHz
	Offset-4 Stop Freq	35 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-25　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:4L Freq Band:3G - 17GHz	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-25 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:4L Freq Band:17G - 30GHz	Frequency Span	70 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	6.4 MHz
	Offset-3 Start Freq	8.8 MHz
	Offset-4 Start Freq	24.8 MHz
	Offset-1 Stop Freq	6.4 MHz
	Offset-2 Stop Freq	8.8 MHz
	Offset-3 Stop Freq	24.8 MHz
	Offset-4 Stop Freq	35 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-25　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:4L Freq Band:17G - 30GHz	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–50.0 dB
	Limit-4 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-25　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:4L Freq Band:above 30GHz	Frequency Span	70 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	6.4 MHz
	Offset-3 Start Freq	8.8 MHz
	Offset-4 Start Freq	20.8 MHz
	Offset-1 Stop Freq	6.4 MHz
	Offset-2 Stop Freq	8.8 MHz
	Offset-3 Stop Freq	20.8 MHz
	Offset-4 Stop Freq	35 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-25　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:4L Freq Band:above 30GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–28.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–28.0 dB
	Limit-3 REL Stop Level	–45.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-25　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:3G - 17GHz	Frequency Span	70 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	6 MHz
	Offset-3 Start Freq	7.25 MHz
	Offset-4 Start Freq	7.75 MHz
	Offset-5 Start Freq	8.5 MHz
	Offset-6 Start Freq	20 MHz
	Offset-7 Start Freq	27 MHz
	Offset-1 Stop Freq	6 MHz
	Offset-2 Stop Freq	7.25 MHz
	Offset-3 Stop Freq	7.75 MHz
	Offset-4 Stop Freq	8.5 MHz
	Offset-5 Stop Freq	20 MHz
	Offset-6 Stop Freq	27 MHz
	Offset-7 Stop Freq	35 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-25　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:3G - 17GHz	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz
	Offset-7 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-25 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:3G - 17GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-7 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-25　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:17G - 30GHz	Frequency Span	70 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	6 MHz
	Offset-3 Start Freq	7.25 MHz
	Offset-4 Start Freq	7.75 MHz
	Offset-5 Start Freq	8.5 MHz
	Offset-6 Start Freq	20 MHz
	Offset-7 Start Freq	23.5 MHz
	Offset-1 Stop Freq	6 MHz
	Offset-2 Stop Freq	7.25 MHz
	Offset-3 Stop Freq	7.75 MHz
	Offset-4 Stop Freq	8.5 MHz
	Offset-5 Stop Freq	20 MHz
	Offset-6 Stop Freq	23.5 MHz
	Offset-7 Stop Freq	35 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-25　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:17G - 30GHz	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz
	Offset-7 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-25　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:17G - 30GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–50.0 dB
	Limit-7 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-25 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:above 30GHz	Frequency Span	70 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	6 MHz
	Offset-3 Start Freq	7.25 MHz
	Offset-4 Start Freq	7.75 MHz
	Offset-5 Start Freq	8.5 MHz
	Offset-6 Start Freq	20 MHz
	Offset-1 Stop Freq	6 MHz
	Offset-2 Stop Freq	7.25 MHz
	Offset-3 Stop Freq	7.75 MHz
	Offset-4 Stop Freq	8.5 MHz
	Offset-5 Stop Freq	20 MHz
	Offset-6 Stop Freq	35 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz

表C.5-25　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:above 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto

表C.5-25 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:14MHz Class:5B Freq Band:above 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	1.0 dB
	Limit-2 REL Start Level	1.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	1.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

Microlink ETSI CS: 28MHz

表C.5-26　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:2	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12.8 MHz
	Offset-3 Start Freq	16.4 MHz
	Offset-4 Start Freq	25 MHz
	Offset-5 Start Freq	45 MHz
	Offset-1 Stop Freq	12.8 MHz
	Offset-2 Stop Freq	16.4 MHz
	Offset-3 Stop Freq	25 MHz
	Offset-4 Stop Freq	45 MHz
	Offset-5 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz

表C.5-26　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:2	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:2	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–23.0 dB
	Limit-4 REL Start Level	–23.0 dB
	Limit-5 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–23.0 dB
	Limit-3 REL Stop Level	–23.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4L Freq Band:3G - 17GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12.8 MHz
	Offset-3 Start Freq	17 MHz
	Offset-4 Start Freq	56 MHz
	Offset-1 Stop Freq	12.8 MHz
	Offset-2 Stop Freq	17 MHz
	Offset-3 Stop Freq	56 MHz
	Offset-4 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4L Freq Band:3G - 17GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–27.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–27.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4L Freq Band:17G - 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12.8 MHz
	Offset-3 Start Freq	17 MHz
	Offset-4 Start Freq	49 MHz
	Offset-1 Stop Freq	12.8 MHz
	Offset-2 Stop Freq	17 MHz
	Offset-3 Stop Freq	49 MHz
	Offset-4 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4L Freq Band:17G - 30GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–27.0 dB
	Limit-4 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–27.0 dB
	Limit-3 REL Stop Level	–50.0 dB
	Limit-4 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4L Freq Band:above 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12.8 MHz
	Offset-3 Start Freq	17 MHz
	Offset-4 Start Freq	42 MHz
	Offset-1 Stop Freq	12.8 MHz
	Offset-2 Stop Freq	17 MHz
	Offset-3 Stop Freq	42 MHz
	Offset-4 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4L Freq Band:above 30GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–27.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–27.0 dB
	Limit-3 REL Stop Level	–45.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:3G - 17GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12 MHz
	Offset-3 Start Freq	15 MHz
	Offset-4 Start Freq	16.8 MHz
	Offset-5 Start Freq	35 MHz
	Offset-6 Start Freq	55 MHz
	Offset-1 Stop Freq	12 MHz
	Offset-2 Stop Freq	15 MHz
	Offset-3 Stop Freq	16.8 MHz
	Offset-4 Stop Freq	35 MHz
	Offset-5 Stop Freq	55 MHz
	Offset-6 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:3G - 17GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:3G - 17GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–33.0 dB
	Limit-5 REL Start Level	–40.0 dB
	Limit-6 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–33.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-5 REL Stop Level	–55.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:17G - 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12 MHz
	Offset-3 Start Freq	15 MHz
	Offset-4 Start Freq	16.8 MHz
	Offset-5 Start Freq	35 MHz
	Offset-6 Start Freq	48.3 MHz
	Offset-1 Stop Freq	12 MHz
	Offset-2 Stop Freq	15 MHz
	Offset-3 Stop Freq	16.8 MHz
	Offset-4 Stop Freq	35 MHz
	Offset-5 Stop Freq	48.3 MHz
	Offset-6 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz

表C.5-26　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:17G - 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:17G - 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–33.0 dB
	Limit-5 REL Start Level	–40.0 dB
	Limit-6 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–33.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-5 REL Stop Level	–50.0 dB
	Limit-6 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:above 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12 MHz
	Offset-3 Start Freq	15 MHz
	Offset-4 Start Freq	16.8 MHz
	Offset-5 Start Freq	35 MHz
	Offset-6 Start Freq	41.7 MHz
	Offset-1 Stop Freq	12 MHz
	Offset-2 Stop Freq	15 MHz
	Offset-3 Stop Freq	16.8 MHz
	Offset-4 Stop Freq	35 MHz
	Offset-5 Stop Freq	41.7 MHz
	Offset-6 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:above 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:4H Freq Band:above 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–33.0 dB
	Limit-5 REL Start Level	–40.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–33.0 dB
	Limit-4 REL Stop Level	–40.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5A - 6A Freq Band:3G - 17GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12.5 MHz
	Offset-3 Start Freq	15 MHz
	Offset-4 Start Freq	17 MHz
	Offset-5 Start Freq	20 MHz
	Offset-6 Start Freq	40 MHz
	Offset-7 Start Freq	54 MHz
	Offset-1 Stop Freq	12.5 MHz
	Offset-2 Stop Freq	15 MHz
	Offset-3 Stop Freq	17 MHz
	Offset-4 Stop Freq	20 MHz
	Offset-5 Stop Freq	40 MHz
	Offset-6 Stop Freq	54 MHz
	Offset-7 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5A - 6A Freq Band:3G - 17GHz	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz
	Offset-7 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5A - 6A Freq Band:3G - 17GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–35.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–35.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-7 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS: 28MHz Class:5A - 6A Freq Band:17G - 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12.5 MHz
	Offset-3 Start Freq	15 MHz
	Offset-4 Start Freq	17 MHz
	Offset-5 Start Freq	20 MHz
	Offset-6 Start Freq	40 MHz
	Offset-7 Start Freq	47 MHz
	Offset-1 Stop Freq	12.5 MHz
	Offset-2 Stop Freq	15 MHz
	Offset-3 Stop Freq	17 MHz
	Offset-4 Stop Freq	20 MHz
	Offset-5 Stop Freq	40 MHz
	Offset-6 Stop Freq	47 MHz
	Offset-7 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS: 28MHz Class:5A - 6A Freq Band:17G - 30GHz	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz
	Offset-7 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS: 28MHz Class:5A - 6A Freq Band:17G - 30GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–35.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–35.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–50.0 dB
	Limit-7 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5A - 6A Freq Band:above 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12.5 MHz
	Offset-3 Start Freq	15 MHz
	Offset-4 Start Freq	17 MHz
	Offset-5 Start Freq	20 MHz
	Offset-6 Start Freq	40 MHz
	Offset-1 Stop Freq	12.5 MHz
	Offset-2 Stop Freq	15 MHz
	Offset-3 Stop Freq	17 MHz
	Offset-4 Stop Freq	20 MHz
	Offset-5 Stop Freq	40 MHz
	Offset-6 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5A - 6A Freq Band:above 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5A - 6A Freq Band:above 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–35.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–35.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B - 6B Freq Band:3G - 17GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12 MHz
	Offset-3 Start Freq	14.5 MHz
	Offset-4 Start Freq	15.5 MHz
	Offset-5 Start Freq	17 MHz
	Offset-6 Start Freq	40 MHz
	Offset-7 Start Freq	54 MHz
	Offset-1 Stop Freq	12 MHz
	Offset-2 Stop Freq	14.5 MHz
	Offset-3 Stop Freq	15.5 MHz
	Offset-4 Stop Freq	17 MHz
	Offset-5 Stop Freq	40 MHz
	Offset-6 Stop Freq	54 MHz
	Offset-7 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B - 6B Freq Band:3G - 17GHz	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz
	Offset-7 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B - 6B Freq Band:3G - 17GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-7 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B6B Freq Band:17G - 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12 MHz
	Offset-3 Start Freq	14.5 MHz
	Offset-4 Start Freq	15.5 MHz
	Offset-5 Start Freq	17 MHz
	Offset-6 Start Freq	40 MHz
	Offset-7 Start Freq	47 MHz
	Offset-1 Stop Freq	12 MHz
	Offset-2 Stop Freq	14.5 MHz
	Offset-3 Stop Freq	15.5 MHz
	Offset-4 Stop Freq	17 MHz
	Offset-5 Stop Freq	40 MHz
	Offset-6 Stop Freq	47 MHz
	Offset-7 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B6B Freq Band:17G - 30GHz	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz
	Offset-7 RBW	100 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B6B Freq Band:17G - 30GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–50.0 dB
	Limit-7 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-26 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B6B Freq Band:above 30GHz	Frequency Span	140 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	100 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	12 MHz
	Offset-3 Start Freq	14.5 MHz
	Offset-4 Start Freq	15.5 MHz
	Offset-5 Start Freq	17 MHz
	Offset-6 Start Freq	40 MHz
	Offset-1 Stop Freq	12 MHz
	Offset-2 Stop Freq	14.5 MHz
	Offset-3 Stop Freq	15.5 MHz
	Offset-4 Stop Freq	17 MHz
	Offset-5 Stop Freq	40 MHz
	Offset-6 Stop Freq	70 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	100 kHz
	Offset-2 RBW	100 kHz
	Offset-3 RBW	100 kHz
	Offset-4 RBW	100 kHz
	Offset-5 RBW	100 kHz
	Offset-6 RBW	100 kHz

表C.5-26　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B6B Freq Band:above 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-26　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:28MHz Class:5B6B Freq Band:above 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

Microlink ETSI CS: 56MHz

表C.5-27　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:4L Freq Band:3G - 17GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	25.6 MHz
	Offset-3 Start Freq	34 MHz
	Offset-4 Start Freq	112 MHz
	Offset-1 Stop Freq	25.6 MHz
	Offset-2 Stop Freq	34 MHz
	Offset-3 Stop Freq	112 MHz
	Offset-4 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz

表C.5-27 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:4L Freq Band:3G - 17GHz	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–27.0 dB
	Limit-4 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–27.0 dB
	Limit-3 REL Stop Level	–55.0 dB
	Limit-4 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:4L Freq Band:17G - 30GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	25.6 MHz
	Offset-3 Start Freq	34 MHz
	Offset-4 Start Freq	98 MHz
	Offset-1 Stop Freq	25.6 MHz
	Offset-2 Stop Freq	34 MHz
	Offset-3 Stop Freq	98 MHz
	Offset-4 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:4L Freq Band:17G - 30GHz	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–27.0 dB
	Limit-4 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–27.0 dB
	Limit-3 REL Stop Level	–50.0 dB
	Limit-4 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:4L Freq Band:above 30GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	25.6 MHz
	Offset-3 Start Freq	34 MHz
	Offset-4 Start Freq	84 MHz
	Offset-1 Stop Freq	25.6 MHz
	Offset-2 Stop Freq	34 MHz
	Offset-3 Stop Freq	84 MHz
	Offset-4 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto

表C.5-27 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
Microlink ETSI	Offset-1 On/Off	On
CS:56MHz	Offset-2 On/Off	On
Class:4L	Offset-3 On/Off	On
Freq Band:above 30GHz	Offset-4 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–27.0 dB
	Limit-4 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–27.0 dB
	Limit-3 REL Stop Level	–45.0 dB
	Limit-4 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A6A Freq Band:3G - 17GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	25 MHz
	Offset-3 Start Freq	30 MHz
	Offset-4 Start Freq	34 MHz
	Offset-5 Start Freq	40 MHz
	Offset-6 Start Freq	80 MHz
	Offset-7 Start Freq	108 MHz
	Offset-1 Stop Freq	25 MHz
	Offset-2 Stop Freq	30 MHz
	Offset-3 Stop Freq	34 MHz
	Offset-4 Stop Freq	40 MHz
	Offset-5 Stop Freq	80 MHz
	Offset-6 Stop Freq	108 MHz
	Offset-7 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A6A Freq Band:3G - 17GHz	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-5 RBW	300 kHz
	Offset-6 RBW	300 kHz
	Offset-7 RBW	300 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A6A Freq Band:3G - 17GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–35.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–35.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-7 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A - 6A Freq Band:17G - 30GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	25 MHz
	Offset-3 Start Freq	30 MHz
	Offset-4 Start Freq	34 MHz
	Offset-5 Start Freq	40 MHz
	Offset-6 Start Freq	80 MHz
	Offset-7 Start Freq	94 MHz
	Offset-1 Stop Freq	25 MHz
	Offset-2 Stop Freq	30 MHz
	Offset-3 Stop Freq	34 MHz
	Offset-4 Stop Freq	40 MHz
	Offset-5 Stop Freq	80 MHz
	Offset-6 Stop Freq	94 MHz
	Offset-7 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A - 6A Freq Band:17G - 30GHz	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-5 RBW	300 kHz
	Offset-6 RBW	300 kHz
	Offset-7 RBW	300 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-27 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A - 6A Freq Band:17G - 30GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–35.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–35.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–50.0 dB
	Limit-7 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A - 6A Freq Band:above 30GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	25 MHz
	Offset-3 Start Freq	30 MHz
	Offset-4 Start Freq	34 MHz
	Offset-5 Start Freq	40 MHz
	Offset-6 Start Freq	80 MHz
	Offset-1 Stop Freq	25 MHz
	Offset-2 Stop Freq	30 MHz
	Offset-3 Stop Freq	34 MHz
	Offset-4 Stop Freq	40 MHz
	Offset-5 Stop Freq	80 MHz
	Offset-6 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-5 RBW	300 kHz
	Offset-6 RBW	300 kHz

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A - 6A Freq Band:above 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5A - 6A Freq Band:above 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–35.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–35.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:3G - 17GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	24 MHz
	Offset-3 Start Freq	29 MHz
	Offset-4 Start Freq	31 MHz
	Offset-5 Start Freq	34 MHz
	Offset-6 Start Freq	80 MHz
	Offset-7 Start Freq	108 MHz
	Offset-1 Stop Freq	24 MHz
	Offset-2 Stop Freq	29 MHz
	Offset-3 Stop Freq	31 MHz
	Offset-4 Stop Freq	34 MHz
	Offset-5 Stop Freq	80 MHz
	Offset-6 Stop Freq	108 MHz
	Offset-7 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:3G - 17GHz	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-5 RBW	300 kHz
	Offset-6 RBW	300 kHz
	Offset-7 RBW	300 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:3G - 17GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–55.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–55.0 dB
	Limit-7 REL Stop Level	–55.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:17G - 30GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	24 MHz
	Offset-3 Start Freq	29 MHz
	Offset-4 Start Freq	31 MHz
	Offset-5 Start Freq	34 MHz
	Offset-6 Start Freq	80 MHz
	Offset-7 Start Freq	94 MHz
	Offset-1 Stop Freq	24 MHz
	Offset-2 Stop Freq	29 MHz
	Offset-3 Stop Freq	31 MHz
	Offset-4 Stop Freq	34 MHz
	Offset-5 Stop Freq	80 MHz
	Offset-6 Stop Freq	94 MHz
	Offset-7 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-7 Reference Level	Auto

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:17G - 30GHz	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-5 RBW	300 kHz
	Offset-6 RBW	300 kHz
	Offset-7 RBW	300 kHz
	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-7 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-7 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-7 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-7 Detection	Positive

表C.5-27　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:17G - 30GHz	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001
	Offset-7 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Offset-7 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-7 REL Start Level	–50.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–50.0 dB
	Limit-7 REL Stop Level	–50.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL
	Limit-7 Fail Logic	REL

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:above 30GHz	Frequency Span	280 MHz
	Limit Side	Both
	Reference Mode	Peak
	Channel BW	1 kHz
	RBW	300 kHz
	VBW	300 Hz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Root Nyquist
	Roll-off Factor	0.22
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	24 MHz
	Offset-3 Start Freq	29 MHz
	Offset-4 Start Freq	31 MHz
	Offset-5 Start Freq	34 MHz
	Offset-6 Start Freq	80 MHz
	Offset-1 Stop Freq	24 MHz
	Offset-2 Stop Freq	29 MHz
	Offset-3 Stop Freq	31 MHz
	Offset-4 Stop Freq	34 MHz
	Offset-5 Stop Freq	80 MHz
	Offset-6 Stop Freq	140 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-6 Reference Level	Auto
	Offset-1 RBW	300 kHz
	Offset-2 RBW	300 kHz
	Offset-3 RBW	300 kHz
	Offset-4 RBW	300 kHz
	Offset-5 RBW	300 kHz
	Offset-6 RBW	300 kHz

表C.5-27　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:above 30GHz	Offset-1 VBW	300 Hz
	Offset-2 VBW	300 Hz
	Offset-3 VBW	300 Hz
	Offset-4 VBW	300 Hz
	Offset-5 VBW	300 Hz
	Offset-6 VBW	300 Hz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto
	Offset-6 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-6 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-6 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-6 Trace Point	1001

表C.5-27 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
Microlink ETSI CS:56MHz Class:5B - 6B Freq Band:above 30GHz	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	On
	Limit-1 REL Start Level	2.0 dB
	Limit-2 REL Start Level	2.0 dB
	Limit-3 REL Start Level	–10.0 dB
	Limit-4 REL Start Level	–32.0 dB
	Limit-5 REL Start Level	–36.0 dB
	Limit-6 REL Start Level	–45.0 dB
	Limit-1 REL Stop Level	2.0 dB
	Limit-2 REL Stop Level	–10.0 dB
	Limit-3 REL Stop Level	–32.0 dB
	Limit-4 REL Stop Level	–36.0 dB
	Limit-5 REL Stop Level	–45.0 dB
	Limit-6 REL Stop Level	–45.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL
	Limit-4 Fail Logic	REL
	Limit-5 Fail Logic	REL
	Limit-6 Fail Logic	REL

TELEC-T403

表C.5-28　SEM 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5180MHz-5240MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	90 MHz
	Offset-2 Start Freq	98 MHz
	Offset-1 Stop Freq	98 MHz
	Offset-2 Stop Freq	100 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5180MHz-5240MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	26.7 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	26.7 MHz
	Offset-4 Stop Freq	120 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5180MHz-5240MHz Upper (WLAN)	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Limit-1 ABS1 Start Level	0.0 dB
	Limit-2 ABS1 Start Level	–10.0 dB
	Limit-3 ABS1 Start Level	–18.01 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–10.0 dB
	Limit-2 ABS1 Stop Level	–18.01 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5260MHz-5320MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	26.7 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	26.7 MHz
	Offset-4 Stop Freq	120 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5260MHz-5320MHz Lower (WLAN)	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Limit-1 ABS1 Start Level	0.0 dB
	Limit-2 ABS1 Start Level	–10.0 dB
	Limit-3 ABS1 Start Level	–18.01 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–10.0 dB
	Limit-2 ABS1 Stop Level	–18.01 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5260MHz-5320MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	90 MHz
	Offset-1 Stop Freq	100 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Limit-1 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5180MHz-5240MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	30 MHz
	Offset-2 Start Freq	38 MHz
	Offset-1 Stop Freq	38 MHz
	Offset-2 Stop Freq	45 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5180MHz-5240MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	26.7 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	26.7 MHz
	Offset-4 Stop Freq	125 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5180MHz-5240MHz Upper (WLAN)	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Limit-1 ABS1 Start Level	0.0 dB
	Limit-2 ABS1 Start Level	–10.0 dB
	Limit-3 ABS1 Start Level	–18.01 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–10.0 dB
	Limit-2 ABS1 Stop Level	–18.01 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5260MHz-5320MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	10 MHz
	Offset-2 Start Freq	11 MHz
	Offset-3 Start Freq	20 MHz
	Offset-4 Start Freq	26.7 MHz
	Offset-1 Stop Freq	11 MHz
	Offset-2 Stop Freq	20 MHz
	Offset-3 Stop Freq	26.7 MHz
	Offset-4 Stop Freq	125 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5260MHz-5320MHz Lower (WLAN)	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Limit-1 ABS1 Start Level	0.0 dB
	Limit-2 ABS1 Start Level	–10.0 dB
	Limit-3 ABS1 Start Level	–18.01 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–10.0 dB
	Limit-2 ABS1 Stop Level	–18.01 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5260MHz-5320MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	20 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	30 MHz
	Offset-1 Stop Freq	45 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Limit-1 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5190MHz-5230MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	40 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	40 MHz
	Offset-2 Start Freq	48.4 MHz
	Offset-1 Stop Freq	48.4 MHz
	Offset-2 Stop Freq	90 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5190MHz-5230MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	40 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	20 MHz
	Offset-2 Start Freq	21 MHz
	Offset-3 Start Freq	40 MHz
	Offset-4 Start Freq	48.4 MHz
	Offset-1 Stop Freq	21 MHz
	Offset-2 Stop Freq	40 MHz
	Offset-3 Stop Freq	48.4 MHz
	Offset-4 Stop Freq	170 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5190MHz-5230MHz Upper (WLAN)	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Limit-1 ABS1 Start Level	–3.01 dB
	Limit-2 ABS1 Start Level	–13.01 dB
	Limit-3 ABS1 Start Level	–21.02 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–13.01 dB
	Limit-2 ABS1 Stop Level	–21.02 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5270MHz-5310MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	40 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	20 MHz
	Offset-2 Start Freq	21 MHz
	Offset-3 Start Freq	40 MHz
	Offset-4 Start Freq	48.4 MHz
	Offset-5 Start Freq	60.0 MHz
	Offset-1 Stop Freq	21 MHz
	Offset-2 Stop Freq	40 MHz
	Offset-3 Stop Freq	48.4 MHz
	Offset-4 Stop Freq	60 MHz
	Offset-5 Stop Freq	170 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-5 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-5 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-5 Sweep Time	Auto

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5270MHz-5310MHz Lower (WLAN)	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast
	Offset-5 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-5 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-5 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-5 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	On
	Offset-6 On/Off	Off

表C.5-28　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5270MHz-5310MHz Lower (WLAN)	Limit-1 ABS1 Start Level	–3.01 dB
	Limit-2 ABS1 Start Level	–13.01 dB
	Limit-3 ABS1 Start Level	–21.02 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-5 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–13.01 dB
	Limit-2 ABS1 Stop Level	–21.02 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-5 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1
	Limit-5 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5270MHz-5310MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	40 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	40 MHz
	Offset-2 Start Freq	48.4 MHz
	Offset-1 Stop Freq	48.4 MHz
	Offset-2 Stop Freq	90 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	60 MHz
	Offset-2 Start Freq	86.8 MHz
	Offset-1 Stop Freq	86.8 MHz
	Offset-2 Stop Freq	190 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	40 MHz
	Offset-2 Start Freq	41 MHz
	Offset-3 Start Freq	80 MHz
	Offset-4 Start Freq	86.7 MHz
	Offset-1 Stop Freq	41 MHz
	Offset-2 Stop Freq	80 MHz
	Offset-3 Stop Freq	86.7 MHz
	Offset-4 Stop Freq	270 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz Upper (WLAN)	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Limit-1 ABS1 Start Level	–6.02 dB
	Limit-2 ABS1 Start Level	–16.02 dB
	Limit-3 ABS1 Start Level	–23.98 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–16.02 dB
	Limit-2 ABS1 Stop Level	–23.98 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	40 MHz
	Offset-2 Start Freq	41 MHz
	Offset-3 Start Freq	80 MHz
	Offset-4 Start Freq	86.7 MHz
	Offset-1 Stop Freq	41 MHz
	Offset-2 Stop Freq	80 MHz
	Offset-3 Stop Freq	86.7 MHz
	Offset-4 Stop Freq	270 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-4 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-4 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-4 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-4 Auto Sweep Time Select	Fast

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz Lower (WLAN)	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-4 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-4 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-4 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	On
	Offset-5 On/Off	Off
	Limit-1 ABS1 Start Level	–6.02 dB
	Limit-2 ABS1 Start Level	–16.02 dB
	Limit-3 ABS1 Start Level	–23.98 dB
	Limit-4 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–16.02 dB
	Limit-2 ABS1 Stop Level	–23.98 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-4 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1
	Limit-4 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	60 MHz
	Offset-2 Start Freq	86.8 MHz
	Offset-1 Stop Freq	86.8 MHz
	Offset-2 Stop Freq	190 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5250MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	160 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	100 MHz
	Offset-2 Start Freq	150.4 MHz
	Offset-1 Stop Freq	150.4 MHz
	Offset-2 Stop Freq	334 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5250MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	160 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	100 MHz
	Offset-2 Start Freq	150.4 MHz
	Offset-1 Stop Freq	150.4 MHz
	Offset-2 Stop Freq	334 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz 80+80 Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	60 MHz
	Offset-2 Start Freq	75.2 MHz
	Offset-1 Stop Freq	75.2 MHz
	Offset-2 Stop Freq	190 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–19.03 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–19.03 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz 80+80 Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	40 MHz
	Offset-2 Start Freq	41 MHz
	Offset-3 Start Freq	75.2 MHz
	Offset-1 Stop Freq	41 MHz
	Offset-2 Stop Freq	75.2 MHz
	Offset-3 Stop Freq	160 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001

表C.5-28　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz 80+80 Upper (WLAN)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Limit-1 ABS1 Start Level	–9.03 dB
	Limit-2 ABS1 Start Level	–19.03 dB
	Limit-3 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–19.03 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz-5530MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	60 MHz
	Offset-2 Start Freq	75.2 MHz
	Offset-1 Stop Freq	75.2 MHz
	Offset-2 Stop Freq	160 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5210MHz-5610MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	115 MHz
	Offset-1 Stop Freq	190 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-1 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz 80+80 Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	40 MHz
	Offset-2 Start Freq	41 MHz
	Offset-3 Start Freq	75.2 MHz
	Offset-1 Stop Freq	41 MHz
	Offset-2 Stop Freq	75.2 MHz
	Offset-3 Stop Freq	270 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-3 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-3 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-3 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-3 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001

表C.5-28　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz 80+80 Lower (WLAN)	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-3 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Limit-1 ABS1 Start Level	–9.03 dB
	Limit-2 ABS1 Start Level	–19.03 dB
	Limit-3 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–19.03 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-3 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1
	Limit-3 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz 80+80 Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	60 MHz
	Offset-2 Start Freq	75.2 MHz
	Offset-1 Stop Freq	75.2 MHz
	Offset-2 Stop Freq	120 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz-5530MHz Lower (WLAN)	Limit Side	Lower
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	60 MHz
	Offset-2 Start Freq	75.2 MHz
	Offset-1 Stop Freq	75.2 MHz
	Offset-2 Stop Freq	120 MHz
	Offset-1 Reference Level	Auto
	Offset-2 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-2 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-2 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-2 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-2 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-2 ABS1 Start Level	–26.02 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-2 ABS1 Stop Level	–26.02 dB
	Limit-1 Fail Logic	ABS1
	Limit-2 Fail Logic	ABS1

表C.5-28　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5290MHz-5610MHz Upper (WLAN)	Limit Side	Upper
	Reference Mode	Channel
	Channel BW	80 MHz
	RBW	1 MHz
	Sweep Time	Auto
	Auto Sweep Time Select	Fast
	Detection	Positive
	Trace Point	1001
	Filter Type	Rect
	Offset-1 Start Freq	115 MHz
	Offset-1 Stop Freq	190 MHz
	Offset-1 Reference Level	Auto
	Offset-1 RBW	1 MHz
	Offset-1 Sweep Time	Auto
	Offset-1 Auto Sweep Time Select	Fast
	Offset-1 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW	Auto
	Offset-1 On/Off	On
	Offset-2 On/Off	Off
	Limit-1 ABS1 Start Level	–18.24 dB
	Limit-1 ABS1 Stop Level	–18.24 dB
	Limit-1 Fail Logic	ABS1

NXDN

表C.5-29 SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
NXDN 47CFR-E_6.25kHz	Limit Side	Both
	Reference Mode	Peak
	Channel BW	6 kHz
	RBW	30 kHz
	VBW	30 kHz
	VBW Mode	Power
	Sweep Time	Manual
	Sweep Time Value	3 sec
	Auto Sweep Time Select	Normal
	Detection	Positive
	Trace Point	1001
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	3 kHz
	Offset-3 Start Freq	4.6 kHz
	Offset-1 Stop Freq	3 kHz
	Offset-2 Stop Freq	4.6 kHz
	Offset-3 Stop Freq	50 kHz
	Offset-1 RBW	100 Hz
	Offset-2 RBW	100 Hz
	Offset-3 RBW	100 Hz
	Offset-1 VBW	1 kHz
	Offset-2 VBW	1 kHz
	Offset-3 VBW	1 kHz
	Offset-1 VBW Mode	Power
	Offset-2 VBW Mode	Power
	Offset-3 VBW Mode	Power

表C.5-29　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
NXDN 47CFR-E_6.25kHz	Offset-1 Sweep Time Switch	Manual
	Offset-1 Sweep Time Value	2.9 sec
	Offset-2 Sweep Time Switch	Manual
	Offset-2 Sweep Time Value	3.5 sec
	Offset-3 Sweep Time Switch	Manual
	Offset-3 Sweep Time Value	6.3 sec
	Offset-1 Auto Sweep Time Select	Normal
	Offset-2 Auto Sweep Time Select	Normal
	Offset-3 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Offset-7 On/Off	Off
	Offset-8 On/Off	Off
	Offset-9 On/Off	Off
	Offset-10 On/Off	Off
	Offset-11 On/Off	Off
	Offset-12 On/Off	Off
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–30.0 dB
	Limit-3 REL Start Level	–65.0 dB
	Limit-1 REL Stop Level	0.0 dB
	Limit-2 REL Stop Level	–56.67 dB
	Limit-3 REL Stop Level	–65.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

表C.5-29　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
NXDN 47CFR-D_12.5kHz	Limit Side	Both
	Reference Mode	Peak
	Channel BW	11.25 kHz
	RBW	30 kHz
	VBW	30 kHz
	VBW Mode	Power
	Sweep Time	Manual
	Sweep Time Value	5.7 sec
	Auto Sweep Time Select	Normal
	Detection	Positive
	Trace Point	1001
	Offset-1 Start Freq	0 Hz
	Offset-2 Start Freq	5.624 kHz
	Offset-3 Start Freq	12.5 kHz
	Offset-1 Stop Freq	5.624 kHz
	Offset-2 Stop Freq	12.5 kHz
	Offset-3 Stop Freq	50 kHz
	Offset-1 RBW	100 Hz
	Offset-2 RBW	100 Hz
	Offset-3 RBW	100 Hz
	Offset-1 VBW	1 kHz
	Offset-2 VBW	1 kHz
	Offset-3 VBW	1 kHz
	Offset-1 VBW Mode	Power
	Offset-2 VBW Mode	Power
	Offset-3 VBW Mode	Power

表C.5-29　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
NXDN 47CFR-D_12.5kHz	Offset-1 Sweep Time Switch	Manual
	Offset-1 Sweep Time Value	2.9 sec
	Offset-2 Sweep Time Switch	Manual
	Offset-2 Sweep Time Value	3.5 sec
	Offset-3 Sweep Time Switch	Manual
	Offset-3 Sweep Time Value	6.3 sec
	Offset-1 Detection	Positive
	Offset-2 Detection	Positive
	Offset-3 Detection	Positive
	Offset-1 Trace Point	1001
	Offset-2 Trace Point	1001
	Offset-3 Trace Point	1001
	Offset-1 On/Off	On
	Offset-2 On/Off	On
	Offset-3 On/Off	On
	Offset-4 On/Off	Off
	Offset-5 On/Off	Off
	Offset-6 On/Off	Off
	Offset-7 On/Off	Off
	Offset-8 On/Off	Off
	Offset-9 On/Off	Off
	Offset-10 On/Off	Off
	Offset-11 On/Off	Off
	Offset-12 On/Off	Off
	Limit-1 REL Start Level	0.0 dB
	Limit-2 REL Start Level	–19.95 dB
	Limit-3 REL Start Level	–70.0 dB
	Limit-1 REL Stop Level	0.0 dB
	Limit-2 REL Stop Level	–69.94 dB
	Limit-3 REL Stop Level	–70.0 dB
	Limit-1 Fail Logic	REL
	Limit-2 Fail Logic	REL
	Limit-3 Fail Logic	REL

5GNR TDD DL (sub-6G)_Conducted

表C.5-30 SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatA 100M BW f ≤ 3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–5.5 dB
	Offset-1 ABS1 Stop Level	–12.5 dB
	Offset-1 ABS2 Start Level	–5.5 dB
	Offset-1 ABS2 Stop Level	–12.5 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatA 100M BW f ≤ 3G)	Offset-2 ABS1 Start Level	–12.5 dB
	Offset-2 ABS1 Stop Level	–12.5 dB
	Offset-2 ABS2 Start Level	–12.5 dB
	Offset-2 ABS2 Stop Level	–12.5 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatA 80M BW f > 3G)	Frequency Span	101 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	80 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	40.05 MHz
	Offset-1 Stop Freq	45.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–5.2 dB
	Offset-1 ABS1 Stop Level	–12.2 dB
	Offset-1 ABS2 Start Level	–5.2 dB
	Offset-1 ABS2 Stop Level	–12.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	45.05 MHz
	Offset-2 Stop Freq	50.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatA 80M BW f > 3G)	Offset-2 ABS1 Start Level	–12.2 dB
	Offset-2 ABS1 Stop Level	–12.2 dB
	Offset-2 ABS2 Start Level	–12.2 dB
	Offset-2 ABS2 Stop Level	–12.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatA 100M BW f > 3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–5.2 dB
	Offset-1 ABS1 Stop Level	–12.2 dB
	Offset-1 ABS2 Start Level	–5.2 dB
	Offset-1 ABS2 Stop Level	–12.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatA 100M BW f > 3G)	Offset-2 ABS1 Start Level	–12.2 dB
	Offset-2 ABS1 Stop Level	–12.2 dB
	Offset-2 ABS2 Start Level	–12.2 dB
	Offset-2 ABS2 Stop Level	–12.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatB 100M BW f ≤ 3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–5.5 dB
	Offset-1 ABS1 Stop Level	–12.5 dB
	Offset-1 ABS2 Start Level	–5.5 dB
	Offset-1 ABS2 Stop Level	–12.5 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatB 100M BW f ≤ 3G)	Offset-2 ABS1 Start Level	–12.5 dB
	Offset-2 ABS1 Stop Level	–12.5 dB
	Offset-2 ABS2 Start Level	–12.5 dB
	Offset-2 ABS2 Stop Level	–12.5 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatB 80M BW f > 3G)	Frequency Span	101 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	80 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	40.05 MHz
	Offset-1 Stop Freq	45.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–5.2 dB
	Offset-1 ABS1 Stop Level	–12.2 dB
	Offset-1 ABS2 Start Level	–5.2 dB
	Offset-1 ABS2 Stop Level	–12.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	45.05 MHz
	Offset-2 Stop Freq	50.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatB 80M BW f > 3G)	Offset-2 ABS1 Start Level	–12.2 dB
	Offset-2 ABS1 Stop Level	–12.2 dB
	Offset-2 ABS2 Start Level	–12.2 dB
	Offset-2 ABS2 Stop Level	–12.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatB 100M BW f > 3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–5.2 dB
	Offset-1 ABS1 Stop Level	–12.2 dB
	Offset-1 ABS2 Start Level	–5.2 dB
	Offset-1 ABS2 Stop Level	–12.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (WBS CatB 100M BW f > 3G)	Offset-2 ABS1 Start Level	–12.2 dB
	Offset-2 ABS1 Stop Level	–12.2 dB
	Offset-2 ABS2 Start Level	–12.2 dB
	Offset-2 ABS2 Stop Level	–12.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f ≤ 3G 100M BW 31 < P ≤ 38dBm)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.5 dB
	Offset-1 REL Stop Level	–58.5 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.5 dB
	Offset-2 REL Stop Level	–58.5 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f ≤ 3G 100M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f ≤ 3G 100M BW P ≤ 31dBm)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.5 dB
	Offset-1 ABS1 Stop Level	–27.5 dB
	Offset-1 ABS2 Start Level	–20.5 dB
	Offset-1 ABS2 Stop Level	–27.5 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f ≤ 3G 100M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.5 dB
	Offset-2 ABS1 Stop Level	–27.5 dB
	Offset-2 ABS2 Start Level	–27.5 dB
	Offset-2 ABS2 Stop Level	–27.5 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 5M BW 31 < P ≤ 38dBm)	Frequency Span	26 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	5 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	2.55 MHz
	Offset-1 Stop Freq	7.55 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	7.55 MHz
	Offset-2 Stop Freq	12.55 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 5M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 10M BW 31 < P ≤ 38dBm)	Frequency Span	31 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	10 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	5.05 MHz
	Offset-1 Stop Freq	10.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	10.05 MHz
	Offset-2 Stop Freq	15.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 10M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 15M BW 31 < P ≤ 38dBm)	Frequency Span	36 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	15 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	7.55 MHz
	Offset-1 Stop Freq	12.55 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	12.55 MHz
	Offset-2 Stop Freq	17.55 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 15M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 20M BW 31 < P ≤ 38dBm)	Frequency Span	41 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	20 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	10.05 MHz
	Offset-1 Stop Freq	15.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	15.05 MHz
	Offset-2 Stop Freq	20.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 20M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 25M BW 31 < P ≤ 38dBm)	Frequency Span	46 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	25 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	12.55 MHz
	Offset-1 Stop Freq	17.55 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	17.55 MHz
	Offset-2 Stop Freq	22.55 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 25M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 30M BW 31 < P ≤ 38dBm)	Frequency Span	51 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	30 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	15.05 MHz
	Offset-1 Stop Freq	20.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	20.05 MHz
	Offset-2 Stop Freq	25.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 30M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 40M BW 31 < P ≤ 38dBm)	Frequency Span	61 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	40 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	20.05 MHz
	Offset-1 Stop Freq	25.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	25.05 MHz
	Offset-2 Stop Freq	30.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 40M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 50M BW 31 < P ≤ 38dBm)	Frequency Span	71 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	50 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	25.05 MHz
	Offset-1 Stop Freq	30.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	30.05 MHz
	Offset-2 Stop Freq	35.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 50M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 60M BW 31 < P ≤ 38dBm)	Frequency Span	81 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	60 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	30.05 MHz
	Offset-1 Stop Freq	35.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	35.05 MHz
	Offset-2 Stop Freq	40.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 60M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 70M BW 31 < P ≤ 38dBm)	Frequency Span	91 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	70 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	35.05 MHz
	Offset-1 Stop Freq	40.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	40.05 MHz
	Offset-2 Stop Freq	45.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 70M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 80M BW 31 < P ≤ 38dBm)	Frequency Span	101 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	80 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	40.05 MHz
	Offset-1 Stop Freq	45.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	45.05 MHz
	Offset-2 Stop Freq	50.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 80M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 90M BW 31 < P ≤ 38dBm)	Frequency Span	111 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	90 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	45.05 MHz
	Offset-1 Stop Freq	50.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	50.05 MHz
	Offset-2 Stop Freq	55.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 90M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 100M BW 31 < P ≤ 38dBm)	Frequency Span	121 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-30　SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 100M BW 31 < P ≤ 38dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 5M BW P ≤ 31dBm)	Frequency Span	26 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	5 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	2.55 MHz
	Offset-1 Stop Freq	7.55 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	7.55 MHz
	Offset-2 Stop Freq	12.55 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 5M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 10M BW P ≤ 31dBm)	Frequency Span	31 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	10 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	5.05 MHz
	Offset-1 Stop Freq	10.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	10.05 MHz
	Offset-2 Stop Freq	15.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 10M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 15M BW P ≤ 31dBm)	Frequency Span	36 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	15 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	7.55 MHz
	Offset-1 Stop Freq	12.55 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	12.55 MHz
	Offset-2 Stop Freq	17.55 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 15M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 20M BW P ≤ 31dBm)	Frequency Span	41 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	20 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	10.05 MHz
	Offset-1 Stop Freq	15.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	15.05 MHz
	Offset-2 Stop Freq	20.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 20M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 25M BW P ≤ 31dBm)	Frequency Span	46 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	25 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	12.55 MHz
	Offset-1 Stop Freq	17.55 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	17.55 MHz
	Offset-2 Stop Freq	22.55 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 25M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 30M BW P ≤ 31dBm)	Frequency Span	51 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	30 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	15.05 MHz
	Offset-1 Stop Freq	20.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	20.05 MHz
	Offset-2 Stop Freq	25.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 30M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 40M BW P ≤ 31dBm)	Frequency Span	61 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	40 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	20.05 MHz
	Offset-1 Stop Freq	25.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	25.05 MHz
	Offset-2 Stop Freq	30.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 40M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 50M BW P ≤ 31dBm)	Frequency Span	71 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	50 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	25.05 MHz
	Offset-1 Stop Freq	30.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	30.05 MHz
	Offset-2 Stop Freq	35.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 50M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 50M BW P ≤ 31dBm)	Frequency Span	81 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	60 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	30.05 MHz
	Offset-1 Stop Freq	35.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	35.05 MHz
	Offset-2 Stop Freq	40.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 50M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 70M BW P ≤ 31dBm)	Frequency Span	91 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	70 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	35.05 MHz
	Offset-1 Stop Freq	40.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	40.05 MHz
	Offset-2 Stop Freq	45.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 70M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 80M BW P ≤ 31dBm)	Frequency Span	101 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	80 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	40.05 MHz
	Offset-1 Stop Freq	45.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	45.05 MHz
	Offset-2 Stop Freq	50.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 80M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 90M BW P ≤ 31dBm)	Frequency Span	111 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	90 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	45.05 MHz
	Offset-1 Stop Freq	50.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	50.05 MHz
	Offset-2 Stop Freq	55.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 90M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 100M BW P ≤ 31dBm)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–20.2 dB
	Offset-1 ABS1 Stop Level	–27.2 dB
	Offset-1 ABS2 Start Level	–20.2 dB
	Offset-1 ABS2 Stop Level	–27.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (MBS f > 3G 100M BW P ≤ 31dBm)	Offset-2 ABS1 Start Level	–27.2 dB
	Offset-2 ABS1 Stop Level	–27.2 dB
	Offset-2 ABS2 Start Level	–27.2 dB
	Offset-2 ABS2 Stop Level	–27.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (LBS f ≤ 3G 100M BW)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–28.5 dB
	Offset-1 ABS1 Stop Level	–35.5 dB
	Offset-1 ABS2 Start Level	–28.5 dB
	Offset-1 ABS2 Stop Level	–35.5 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (LBS f ≤ 3G 100M BW)	Offset-2 ABS1 Start Level	–35.5 dB
	Offset-2 ABS1 Stop Level	–35.5 dB
	Offset-2 ABS2 Start Level	–35.5 dB
	Offset-2 ABS2 Stop Level	–35.5 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (LBS f > 3G 80M BW)	Frequency Span	101 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	80 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	40.05 MHz
	Offset-1 Stop Freq	45.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–28.2 dB
	Offset-1 ABS1 Stop Level	–35.2 dB
	Offset-1 ABS2 Start Level	–28.2 dB
	Offset-1 ABS2 Stop Level	–35.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	45.05 MHz
	Offset-2 Stop Freq	50.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (LBS f > 3G 80M BW)	Offset-2 ABS1 Start Level	–35.2 dB
	Offset-2 ABS1 Stop Level	–35.2 dB
	Offset-2 ABS2 Start Level	–35.2 dB
	Offset-2 ABS2 Stop Level	–35.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-30 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (LBS f > 3G 100M BW)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–28.2 dB
	Offset-1 ABS1 Stop Level	–35.2 dB
	Offset-1 ABS2 Start Level	–28.2 dB
	Offset-1 ABS2 Stop Level	–35.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-30　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Con (LBS f > 3G 100M BW)	Offset-2 ABS1 Start Level	–35.2 dB
	Offset-2 ABS1 Stop Level	–35.2 dB
	Offset-2 ABS2 Start Level	–35.2 dB
	Offset-2 ABS2 Stop Level	–35.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

5GNR TDD DL (sub-6G)_Radiated

表C.5-31 SEM 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatA 100M BW f ≤ 3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	3.8 dB
	Offset-1 ABS1 Stop Level	–3.2 dB
	Offset-1 ABS2 Start Level	3.8 dB
	Offset-1 ABS2 Stop Level	–3.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatA 100M BW f ≤ 3G)	Offset-2 ABS1 Start Level	–3.2 dB
	Offset-2 ABS1 Stop Level	–3.2 dB
	Offset-2 ABS2 Start Level	–3.2 dB
	Offset-2 ABS2 Stop Level	–3.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatA 100M BW f > 3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	4.0 dB
	Offset-1 ABS1 Stop Level	–3.0 dB
	Offset-1 ABS2 Start Level	4.0 dB
	Offset-1 ABS2 Stop Level	–3.0 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatA 100M BW f > 3G)	Offset-2 ABS1 Start Level	–3.0 dB
	Offset-2 ABS1 Stop Level	–3.0 dB
	Offset-2 ABS2 Start Level	–3.0 dB
	Offset-2 ABS2 Stop Level	–3.0 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatB 100M BW f ≤3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	3.8 dB
	Offset-1 ABS1 Stop Level	–3.2 dB
	Offset-1 ABS2 Start Level	3.8 dB
	Offset-1 ABS2 Stop Level	–3.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatB 100M BW f ≤3G)	Offset-2 ABS1 Start Level	–3.2 dB
	Offset-2 ABS1 Stop Level	–3.2 dB
	Offset-2 ABS2 Start Level	–3.2 dB
	Offset-2 ABS2 Stop Level	–3.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatB 100M BW f > 3G)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	4.0 dB
	Offset-1 ABS1 Stop Level	–3.0 dB
	Offset-1 ABS2 Start Level	4.0 dB
	Offset-1 ABS2 Stop Level	–3.0 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (WBS CatB 100M BW f > 3G)	Offset-2 ABS1 Start Level	–3.0 dB
	Offset-2 ABS1 Stop Level	–3.0 dB
	Offset-2 ABS2 Start Level	–3.0 dB
	Offset-2 ABS2 Stop Level	–3.0 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f ≤3G 100M BW 40 < P ≤ 47dBm)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–51.2 dB
	Offset-1 REL Stop Level	–58.2 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.2 dB
	Offset-2 REL Stop Level	–58.2 dB
	Offset-2 Fail Logic	REL

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f ≤3G 100M BW 40 < P ≤ 47dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f > 3G 100M BW 40 < P ≤ 47dBm)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 REL Start Level	–1.0 dB
	Offset-1 REL Stop Level	–58.0 dB
	Offset-1 Fail Logic	REL
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto
	Offset-2 REL Start Level	–58.0 dB
	Offset-2 REL Stop Level	–58.0 dB
	Offset-2 Fail Logic	REL

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f > 3G 100M BW 40 < P ≤ 47dBm)	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f ≤3G 100M BW P ≤ 40dBm)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–11.2 dB
	Offset-1 ABS1 Stop Level	–18.2 dB
	Offset-1 ABS2 Start Level	–11.2 dB
	Offset-1 ABS2 Stop Level	–18.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f ≤3G 100M BW P ≤ 40dBm)	Offset-2 ABS1 Start Level	–18.2 dB
	Offset-2 ABS1 Stop Level	–18.2 dB
	Offset-2 ABS2 Start Level	–18.2 dB
	Offset-2 ABS2 Stop Level	–18.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f > 3G 100M BW P ≤ 40dBm)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–11.0 dB
	Offset-1 ABS1 Stop Level	–18.0 dB
	Offset-1 ABS2 Start Level	–11.0 dB
	Offset-1 ABS2 Stop Level	–18.0 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (MBS f > 3G 100M BW P ≤ 40dBm)	Offset-2 ABS1 Start Level	–18.0 dB
	Offset-2 ABS1 Stop Level	–18.0 dB
	Offset-2 ABS2 Start Level	–18.0 dB
	Offset-2 ABS2 Stop Level	–18.0 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (LBS f ≤ 3G 100M BW)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–19.2 dB
	Offset-1 ABS1 Stop Level	–26.2 dB
	Offset-1 ABS2 Start Level	–19.2 dB
	Offset-1 ABS2 Stop Level	–26.2 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (LBS f ≤ 3G 100M BW)	Offset-2 ABS1 Start Level	–26.2 dB
	Offset-2 ABS1 Stop Level	–26.2 dB
	Offset-2 ABS2 Start Level	–26.2 dB
	Offset-2 ABS2 Stop Level	–26.2 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

表C.5-31 SEM 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (LBS f > 3G 100M BW)	Frequency Span	120.1 MHz
	Total Offset Number	2
	Limit Side	Both
	Noise Cancel	Off
	Reference Mode	Channel
	Reference Ch BW	100 MHz
	RBW	100 kHz
	Reference Sweep Time Switch	Auto
	Reference Auto Sweep Time Select	Normal
	Reference Detection	Positive
	VBW Value	1 kHz
	Reference Trace Point	1001
	Reference Filter Type	Rect
	Offset-1 Switch	On
	Offset-1 Start Freq	50.05 MHz
	Offset-1 Stop Freq	55.05 MHz
	Offset-1 Reference Level Switch	Auto
	Offset-1 RBW	100 kHz
	Offset-1 Sweep Time Switch	Auto
	Offset-1 Auto Sweep Time Select	Normal
	Offset-1 Detection	Positive
	Offset-1 VBW Value	1 kHz
	Offset-1 Trace Point	1001
	Offset-1 Integrate BW Switch	Auto
	Offset-1 ABS1 Start Level	–19.0 dB
	Offset-1 ABS1 Stop Level	–26.0 dB
	Offset-1 ABS2 Start Level	–19.0 dB
	Offset-1 ABS2 Stop Level	–26.0 dB
	Offset-1 Fail Logic	ABS1
	Offset-2 Switch	On
	Offset-2 Start Freq	55.05 MHz
	Offset-2 Stop Freq	60.05 MHz
	Offset-2 Reference Level Switch	Auto
	Offset-2 RBW	100 kHz
	Offset-2 Sweep Time Switch	Auto
	Offset-2 Auto Sweep Time Select	Normal
	Offset-2 Detection	Positive
	Offset-2 VBW Value	1 kHz
	Offset-2 Trace Point	1001
	Offset-2 Integrate BW Switch	Auto

表C.5-31　SEM 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
5GNR TDD DL (s6G)_Rad (LBS f > 3G 100M BW)	Offset-2 ABS1 Start Level	–26.0 dB
	Offset-2 ABS1 Stop Level	–26.0 dB
	Offset-2 ABS2 Start Level	–26.0 dB
	Offset-2 ABS2 Stop Level	–26.0 dB
	Offset-2 Fail Logic	ABS1
	Offset-3 Switch	Off
	Offset-3 Fail Logic	Off
	Offset-4 Switch	Off
	Offset-4 Fail Logic	Off
	Offset-5 Switch	Off
	Offset-5 Fail Logic	Off
	Offset-6 Switch	Off
	Offset-6 Fail Logic	Off
	Offset-7 Switch	Off
	Offset-7 Fail Logic	Off
	Offset-8 Switch	Off
	Offset-8 Fail Logic	Off
	Offset-9 Switch	Off
	Offset-9 Fail Logic	Off
	Offset-10 Switch	Off
	Offset-10 Fail Logic	Off
	Offset-11 Switch	Off
	Offset-11 Fail Logic	Off
	Offset-12 Switch	Off
	Offset-12 Fail Logic	Off

C.6 Spurious Emission

TELEC-T401

表C.6-1 Spurious Emission 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
TELEC-T401 (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	On
	Spurious Segment Switch6	On
	Spurious Segment Switch7	On
	Spurious Segment Switch8	On
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	2.387 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	2.387 GHz
	Segment-2 Stop Freq	2.4000 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–16 dB
	Segment-2 Limit Stop Level	–16 dB

表C.6-1　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T401 (WLAN)	Segment-3 Start Freq	2.4835 GHz
	Segment-3 Stop Freq	2.4965 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–16 dB
	Segment-3 Limit Stop Level	–16 dB
	Segment-4 Start Freq	2.4965 GHz
	Segment-4 Stop Freq	12.5 GHz or Max Frequency
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–26 dB
	Segment-4 Limit Stop Level	–26 dB
	Segment-5 Start Freq	2.374 GHz
	Segment-5 Stop Freq	2.387 GHz
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–26 dB
	Segment-5 Limit Stop Level	–26 dB
	Segment-6 Start Freq	2.387 GHz
	Segment-6 Stop Freq	2.400 GHz
	Segment-6 RBW	1 MHz
	Segment-6 VBW	1 MHz
	Segment-6 Sweep Time Switch	Auto
	Segment-6 Detection	Positive
	Segment-6 Limit Start Level	–16 dB
	Segment-6 Limit Stop Level	–16 dB

表C.6-1 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T401 (WLAN)	Segment-7 Start Freq	2.4835 GHz
	Segment-7 Stop Freq	2.4965 GHz
	Segment-7 RBW	1 MHz
	Segment-7 VBW	1 MHz
	Segment-7 Sweep Time Switch	Auto
	Segment-7 Detection	Positive
	Segment-7 Limit Start Level	–16 dB
	Segment-7 Limit Stop Level	–16 dB
	Segment-8 Start Freq	2.4965 GHz
	Segment-8 Stop Freq	2.5095 GHz
	Segment-8 RBW	1 MHz
	Segment-8 VBW	1 MHz
	Segment-8 Sweep Time Switch	Auto
	Segment-8 Detection	Positive
	Segment-8 Limit Start Level	–26 dB
	Segment-8 Limit Stop Level	–26 dB

TELEC-T402

表C.6-2　Spurious Emission 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TELEC-T402 (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	On
	Spurious Segment Switch6	On
	Spurious Segment Switch7	On
	Spurious Segment Switch8	On
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	2.458 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	2.458 GHz
	Segment-2 Stop Freq	2.471 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–16 dB
	Segment-2 Limit Stop Level	–16 dB
	Segment-3 Start Freq	2.497 GHz
	Segment-3 Stop Freq	2.510 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–16 dB
	Segment-3 Limit Stop Level	–16 dB

表C.6-2 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T402 (WLAN)	Segment-4 Start Freq	2.510 GHz
	Segment-4 Stop Freq	12.5 GHz or Max Frequency
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–26 dB
	Segment-4 Limit Stop Level	–26 dB
	Segment-5 Start Freq	2.450 GHz
	Segment-5 Stop Freq	2.458 GHz
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–26 dB
	Segment-5 Limit Stop Level	–26 dB
	Segment-6 Start Freq	2.458 GHz
	Segment-6 Stop Freq	2.471 GHz
	Segment-6 RBW	1 MHz
	Segment-6 VBW	1 MHz
	Segment-6 Sweep Time Switch	Auto
	Segment-6 Detection	Positive
	Segment-6 Limit Start Level	–16 dB
	Segment-6 Limit Stop Level	–16 dB
	Segment-7 Start Freq	2.497 GHz
	Segment-7 Stop Freq	2.510 GHz
	Segment-7 RBW	1 MHz
	Segment-7 VBW	1 MHz
	Segment-7 Sweep Time Switch	Auto
	Segment-7 Detection	Positive
	Segment-7 Limit Start Level	–16 dB
	Segment-7 Limit Stop Level	–16 dB
	Segment-8 Start Freq	2.510 GHz
	Segment-8 Stop Freq	2.523 GHz
	Segment-8 RBW	1 MHz
	Segment-8 VBW	1 MHz
	Segment-8 Sweep Time Switch	Auto
	Segment-8 Detection	Positive
	Segment-8 Limit Start Level	–26 dB
	Segment-8 Limit Stop Level	–26 dB

TELEC-T403

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5.2GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.14 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.360 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5.3GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.14 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.360 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 ≦18MHz 5.6GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.46 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.74 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5.2GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.135 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.365 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5.3GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.135 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.365 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 18MHz <, ≦19MHz 5.6GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.455 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.745 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 19MHz < 5.2GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.1 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.4 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 19MHz < 5.3GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.1 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.4 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 19MHz < 5.6GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.42 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.76 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 38MHz <, ≦78MHz 5.2GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.020 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.480 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 38MHz <, ≦78MHz 5.3GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.020 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.480 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 38MHz <, ≦78MHz 5.6GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.340 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.800 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 78MHz < 5.2GHz 5.3GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.916 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.584 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 78MHz < 5.6GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.42 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26 dB
	Segment-1 Limit Stop Level	–26 dB
	Segment-2 Start Freq	5.76 GHz
	Segment-2 Stop Freq	26 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5500MHz-5700MHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	5.455 GHz
	Segment-1 Stop Freq	5.460 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–26.02 dB
	Segment-1 Limit Stop Level	–26.02 dB
	Segment-2 Start Freq	5.460 GHz
	Segment-2 Stop Freq	5.470 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–19.03 dB
	Segment-2 Limit Stop Level	–19.03 dB
	Segment-3 Start Freq	5.725 GHz
	Segment-3 Stop Freq	5.740 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–19.03 dB
	Segment-3 Limit Stop Level	–19.03 dB
	Segment-4 Start Freq	5.740 GHz
	Segment-4 Stop Freq	5.745 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–26.02 dB
	Segment-4 Limit Stop Level	–26.02 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5510MHz-5670MHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	Off
	Segment-1 Start Freq	5.420 GHz
	Segment-1 Stop Freq	5.460 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–19.03 dB
	Segment-1 Limit Stop Level	–19.03 dB
	Segment-2 Start Freq	5.460 GHz
	Segment-2 Stop Freq	5.470 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–13.01 dB
	Segment-2 Limit Stop Level	–13.01 dB
	Segment-3 Start Freq	5.725 GHz
	Segment-3 Stop Freq	5.760 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–19.03 dB
	Segment-3 Limit Stop Level	–19.03 dB

表C.6-3　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5530MHz-5610MHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	5.340 GHz
	Segment-1 Stop Freq	5.460 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–19.03 dB
	Segment-1 Limit Stop Level	–19.03 dB
	Segment-2 Start Freq	5.4600 GHz
	Segment-2 Stop Freq	5.4695 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–13.01 dB
	Segment-2 Limit Stop Level	–13.01 dB
	Segment-3 Start Freq	5.4695 GHz
	Segment-3 Stop Freq	5.470 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–12.91 dB
	Segment-3 Limit Stop Level	–12.91 dB
	Segment-4 Start Freq	5.725 GHz
	Segment-4 Stop Freq	5.860 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–19.03 dB
	Segment-4 Limit Stop Level	–19.03 dB

表C.6-3 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T403 5570MHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	Off
	Segment-1 Start Freq	5.2360 GHz
	Segment-1 Stop Freq	5.4196 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–19.03 dB
	Segment-1 Limit Stop Level	–19.03 dB
	Segment-2 Start Freq	5.4196 GHz
	Segment-2 Stop Freq	5.4700 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–13.01 dB
	Segment-2 Limit Stop Level	–13.01 dB
	Segment-3 Start Freq	5.725 GHz
	Segment-3 Stop Freq	5.904 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–19.03 dB
	Segment-3 Limit Stop Level	–19.03 dB

TELEC-T405

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧

Standard	パラメータ名	設定値
TELEC-T405 5MHz 4.9GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.87 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.87 GHz
	Segment-2 Stop Freq	4.9025 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	4.9575 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 5MHz 4.9GHz (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 5MHz 5.0GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.99 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.99 GHz
	Segment-2 Stop Freq	5.0225 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	5.0675 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 5MHz 5.0GHz (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 10MHz 4.9GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.87 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.87 GHz
	Segment-2 Stop Freq	4.895 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	4.965 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 10MHz 4.9GHz (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 10MHz 5.0GHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.99 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.99 GHz
	Segment-2 Stop Freq	5.015 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	5.075 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 10MHz 5.0GHz (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 20MHz 4.9GHz OFDM (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.87 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.87 GHz
	Segment-2 Stop Freq	4.875 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	5.025 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 20MHz 4.9GHz OFDM (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 20MHz 4.9GHz DSSS/CCK (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.87 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.87 GHz
	Segment-2 Stop Freq	4.88 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	5.020 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 20MHz 4.9GHz DSSS/CCK (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 20MHz 5.0GHz OFDM (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.99 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.99 GHz
	Segment-2 Stop Freq	4.995 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	5.125 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 20MHz 5.0GHz OFDM (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧（続き）

Standard	パラメータ名	設定値
TELEC-T405 20MHz 5.0GHz DSSS/CCK (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.99 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	4.99 GHz
	Segment-2 Stop Freq	5.00 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	5.120 GHz
	Segment-3 Stop Freq	5.27 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–26 dB
	Segment-3 Limit Stop Level	–26 dB

表C.6-4 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 20MHz 5.0GHz DSSS/CCK (WLAN)	Segment-4 Start Freq	5.27 GHz
	Segment-4 Stop Freq	5.342 GHz
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–37 dB
	Segment-4 Limit Stop Level	–37 dB
	Segment-5 Start Freq	5.342 GHz
	Segment-5 Stop Freq	26 GHz or Max Frequency
	Segment-5 RBW	1 MHz
	Segment-5 VBW	1 MHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

表C.6-4　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
TELEC-T405 40MHz (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	4.840 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	5.06 GHz
	Segment-2 Stop Freq	5.270 GHz
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–26 dB
	Segment-2 Limit Stop Level	–26 dB
	Segment-3 Start Freq	5.27 GHz
	Segment-3 Stop Freq	5.342 GHz
	Segment-3 RBW	1 MHz
	Segment-3 VBW	1 MHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–37 dB
	Segment-3 Limit Stop Level	–37 dB
	Segment-4 Start Freq	5.342 GHz
	Segment-4 Stop Freq	26 GHz or Max Frequency
	Segment-4 RBW	1 MHz
	Segment-4 VBW	1 MHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–30 dB
	Segment-4 Limit Stop Level	–30 dB

FCC 15 407

表C.6-5 Spurious Emission 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
FCC 15 407 5.15GHZ (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Spurious Segment Switch4	Off
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.15 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	5.25 GHz
	Segment-2 Stop Freq	6.00 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–27 dB
	Segment-2 Limit Stop Level	–27 dB

表C.6-5　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
FCC 15.407 5.25GHZ TX (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Spurious Segment Switch4	Off
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.15 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	5.35 GHz
	Segment-2 Stop Freq	6.00 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–27 dB
	Segment-2 Limit Stop Level	–27 dB

表C.6-5 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
FCC 15.407 5.25GHZ DEVICES (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Spurious Segment Switch4	Off
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.15 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	5.25 GHz
	Segment-2 Stop Freq	6.00 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–27 dB
	Segment-2 Limit Stop Level	–27 dB

表C.6-5　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
FCC 15.407 5.47GHZ (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	Off
	Spurious Segment Switch4	Off
	Spurious Segment Switch5	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	5.47 GHz
	Segment-1 RBW	1 MHz
	Segment-1 VBW	1 MHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–27 dB
	Segment-1 Limit Stop Level	–27 dB
	Segment-2 Start Freq	5.725 GHz
	Segment-2 Stop Freq	6.00 GHz or Max Frequency
	Segment-2 RBW	1 MHz
	Segment-2 VBW	1 MHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–27 dB
	Segment-2 Limit Stop Level	–27 dB

ETSI EN 301 893

表C.6-6 Spurious Emission 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	On
	Spurious Segment Switch6	On
	Spurious Segment Switch7	On
	Spurious Segment Switch8	On
	Spurious Segment Switch9	On
	Spurious Segment Switch10	On
	Spurious Segment Switch11	On
	Spurious Segment Switch12	On
	Spurious Segment Switch13	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	47 MHz
	Segment-1 RBW	100 kHz
	Segment-1 VBW	100 kHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–36 dB
	Segment-1 Limit Stop Level	–36 dB
	Segment-2 Start Freq	47 MHz
	Segment-2 Stop Freq	74 MHz
	Segment-2 RBW	100 kHz
	Segment-2 VBW	100 kHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–54 dB
	Segment-2 Limit Stop Level	–54 dB

表C.6-6　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 (WLAN)	Segment-3 Start Freq	74 MHz
	Segment-3 Stop Freq	87.5 MHz
	Segment-3 RBW	100 kHz
	Segment-3 VBW	100 kHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–36 dB
	Segment-3 Limit Stop Level	–36 dB
	Segment-4 Start Freq	87.5 MHz
	Segment-4 Stop Freq	118 MHz
	Segment-4 RBW	100 kHz
	Segment-4 VBW	100 kHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–54 dB
	Segment-4 Limit Stop Level	–54 dB
	Segment-5 Start Freq	118 MHz
	Segment-5 Stop Freq	174 MHz
	Segment-5 RBW	100 kHz
	Segment-5 VBW	100 kHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–36 dB
	Segment-5 Limit Stop Level	–36 dB
	Segment-6 Start Freq	174 MHz
	Segment-6 Stop Freq	230 MHz
	Segment-6 RBW	100 kHz
	Segment-6 VBW	100 kHz
	Segment-6 Sweep Time Switch	Auto
	Segment-6 Detection	Positive
	Segment-6 Limit Start Level	–54 dB
	Segment-6 Limit Stop Level	–54 dB

表C.6-6 Spurious Emission 機能の Standard パラメーター覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 (WLAN)	Segment-7 Start Freq	2300 MHz
	Segment-7 Stop Freq	4700 MHz
	Segment-7 RBW	100 kHz
	Segment-7 VBW	100 kHz
	Segment-7 Sweep Time Switch	Auto
	Segment-7 Detection	Positive
	Segment-7 Limit Start Level	–36 dB
	Segment-7 Limit Stop Level	–36 dB
	Segment-8 Start Freq	470 MHz
	Segment-8 Stop Freq	862 MHz
	Segment-8 RBW	100 kHz
	Segment-8 VBW	100 kHz
	Segment-8 Sweep Time Switch	Auto
	Segment-8 Detection	Positive
	Segment-8 Limit Start Level	–54 dB
	Segment-8 Limit Stop Level	–54 dB
	Segment-9 Start Freq	862 MHz
	Segment-9 Stop Freq	1.0 GHz
	Segment-9 RBW	100 kHz
	Segment-9 VBW	100 kHz
	Segment-9 Sweep Time Switch	Auto
	Segment-9 Detection	Positive
	Segment-9 Limit Start Level	–36 dB
	Segment-9 Limit Stop Level	–36 dB
	Segment-10 Start Freq	1.0 GHz
	Segment-10 Stop Freq	5.15 GHz
	Segment-10 RBW	1 MHz
	Segment-10 VBW	1 MHz
	Segment-10 Sweep Time Switch	Auto
	Segment-10 Detection	Positive
	Segment-10 Limit Start Level	–30 dB
	Segment-10 Limit Stop Level	–30 dB

表C.6-6　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 301 893 V1.5.1 (WLAN)	Segment-11 Start Freq	5.35 GHz
	Segment-11 Stop Freq	5.47 GHz
	Segment-11 RBW	1 MHz
	Segment-11 VBW	1 MHz
	Segment-11 Sweep Time Switch	Auto
	Segment-11 Detection	Positive
	Segment-11 Limit Start Level	–30 dB
	Segment-11 Limit Stop Level	–30 dB
	Segment-12 Start Freq	5.75 GHz
	Segment-12 Stop Freq	Max Frequency
	Segment-12 RBW	1 MHz
	Segment-12 VBW	1 MHz
	Segment-12 Sweep Time Switch	Auto
	Segment-12 Detection	Positive
	Segment-12 Limit Start Level	–30 dB
	Segment-12 Limit Stop Level	–30 dB

ETSI EN 300 328

表C.6-7 Spurious Emission 機能の Standard パラメーター覧

Standard	パラメータ名	設定値
ETSI EN 300 328 V1.7.1 (WLAN)	Spurious Result Type	Worst
	Spurious Fail Stop	Off
	Spurious Segment Switch1	On
	Spurious Segment Switch2	On
	Spurious Segment Switch3	On
	Spurious Segment Switch4	On
	Spurious Segment Switch5	On
	Spurious Segment Switch6	Off
	Spurious Segment Switch7	Off
	Spurious Segment Switch8	Off
	Spurious Segment Switch9	Off
	Spurious Segment Switch10	Off
	Spurious Segment Switch11	Off
	Spurious Segment Switch12	Off
	Spurious Segment Switch13	Off
	Segment-1 Start Freq	30 MHz
	Segment-1 Stop Freq	1 GHz
	Segment-1 RBW	100 kHz
	Segment-1 VBW	30 kHz
	Segment-1 Sweep Time Switch	Auto
	Segment-1 Detection	Positive
	Segment-1 Limit Start Level	–36 dB
	Segment-1 Limit Stop Level	–36 dB
	Segment-2 Start Freq	1 GHz
	Segment-2 Stop Freq	1.8 GHz
	Segment-2 RBW	100 kHz
	Segment-2 VBW	30 kHz
	Segment-2 Sweep Time Switch	Auto
	Segment-2 Detection	Positive
	Segment-2 Limit Start Level	–30 dB
	Segment-2 Limit Stop Level	–30 dB

表C.6-7　Spurious Emission 機能の Standard パラメーター一覧 (続き)

Standard	パラメータ名	設定値
ETSI EN 300 328 V1.7.1 (WLAN)	Segment-3 Start Freq	1.8 GHz
	Segment-3 Stop Freq	1.9 GHz
	Segment-3 RBW	100 kHz
	Segment-3 VBW	30 kHz
	Segment-3 Sweep Time Switch	Auto
	Segment-3 Detection	Positive
	Segment-3 Limit Start Level	–47 dB
	Segment-3 Limit Stop Level	–47 dB
	Segment-4 Start Freq	5.15 GHz
	Segment-4 Stop Freq	5.3 GHz
	Segment-4 RBW	100 kHz
	Segment-4 VBW	30 kHz
	Segment-4 Sweep Time Switch	Auto
	Segment-4 Detection	Positive
	Segment-4 Limit Start Level	–47 dB
	Segment-4 Limit Stop Level	–47 dB
	Segment-5 Start Freq	5.3 GHz
	Segment-5 Stop Freq	6.00 GHz or 12.75 GHz
	Segment-5 RBW	100 kHz
	Segment-5 VBW	30 kHz
	Segment-5 Sweep Time Switch	Auto
	Segment-5 Detection	Positive
	Segment-5 Limit Start Level	–30 dB
	Segment-5 Limit Stop Level	–30 dB

参照先は章，節，および項番号です。

■50 音順

あ

ウォームアップメッセージ　8.3

か

外部トリガ　5.1.1，5.2.1
ゲート　2.1，5.2
ゲートビュー　5.2.2
検波モード　2.5.2，3.1.4

き

基準周波数信号　8.6

さ

周波数　2.1，2.3
周波数カウンタ　4.1.8
周波数スパン　2.1，2.3.2
周波数ドメインモード　2.3.2
スプリアスエミッション　7.7
スペクトラムエミッションマスク　7.6
占有帯域幅測定　7.1，7.5
掃引型スペクトラムアナライザ　1.1
掃引時間　2.1

た

タイムドメインモード　2.3.2
チャネルパワー測定　7.4
トリガ　2.1，5.1
トレース　2.1，4.1.4
トレースポイント　2.1，3.2.2

な

内部基準周波数信号　8.5

は

バースト内平均電力　7.1，7.3
ピーキングバイアス　6.1
ピークサーチ　2.1
ビデオ帯域幅　2.1，2.5，2.5.2
ビデオトリガ　5.1.1
フィルタ　7.2，7.4
プリアンプ　2.4.6
プリセレクタ　6.1
プリセレクタ下限拡張　2.3.6
プリセレクタチューニング　6.1
分解能帯域幅　2.1，2.5，2.5.1

ま

マーカ　2.1，4.1
マーカトラッキング　4.1，4.2.9

ら

隣接チャネル漏洩電力　7.1，7.2
レベル　2.1，2.4
レベル表示単位　2.4.4
ロールオフ率　7.2，7.4

わ

ワイド IF ビデオトリガ　5.1.1，5.2.1

■アルファベット順

A

Accessory 2.1, 6.1, 8.1
ACP 7.1, 7.2
ACP Reference 7.2
Add Point 3.2.4
Active Trace 3.1, 3.1.2, 3.1.3
Adjacent Channel Leakage Power 7.1, 7.2
Amplitude 2.1, 2.4, 3.2.4
ACP 機能の Standard パラメーター一覧 C-1
Attenuator 2.4
Auto Sweep Time Select 3.3
Average 3.1

B

BBIF トリガ 5.1.1, 5.2.1
Burst Average Power 7.1, 7.3
Burst Average Power 機能の Standard パラメーター一覧 C-2
BW 2.1, 2.5

C

Center 2.3
Ch BW 7.2
Channel Power 7.1, 7.4
Channel Power 機能の Standard パラメーター一覧 C-3
Connected to Previous Pt 3.2.4
Continuous 2.2
Couple Time/Frequency Domain 2.3.7
Create Envelope 3.2.5

D

Delete All Limits 3.2.2
Delete Limit 3.2.3
Delete Point 3.2.4
Delta 4.1
Detection 2.5.2, 3.1

E

Edit 3.2.3
Envelope 3.2.3
Envelope Point 3.2.5
Erase Warm Up Message 8.1
Event Type 3.4.1
External 5.1.1, 5.2.1

F

Filter Type 7.2, 7.4
Freq. Count 4.1.8
Frequency 2.1, 2.3, 3.2.4
Frequency Band Mode 2.3
Full Span 2.3

G

Gate 2.1, 5.1, 5.2
Gate Delay 5.1
Gate Length 5.1
Gate Level 5.1
Gate Slope 5.1
Gate Source 5.1
Gate Sweep 5.1, 5.2.1
Gate Time 4.1.8
Gate View 5.2.2

I

In Band Ch BW 7.2

L

Limit Test 3.2, 3.2.2
Limit Line 3.2
Limit1 3.2.2
Limit2 3.2.2
Limit (Amplitude) 3.2.2
Limit Display 3.2.3
Lin Average 3.1.1
Lin Scale Division 2.4.3
Lin スケール 2.4.3
Load Standard Parameter 7.2, 7.3, 7.4, 7.5
Log Scale Division 2.4.3
Log Scale Line 2.4.3
Log Scale Unit 2.4, 2.4.4
Log スケール 2.4.3

M

Margin 3.2.3
Margin Value 3.2.3
Marker 2.1, 4.1, 4.3
Marker to Center Freq. 4.1, 4.2, 4.2.5
Marker to Ref. Level 4.1, 4.2, 4.2.5
Max Hold 3.1.1, 3.1.3
Measure 2.1, 7.1
Measure 機能 2.1, 7.1
Mirror Limit 3.2.3
Min Hold 3.1.1, 3.1.3

N

Negative 3.1.4
Next Peak 4.2
Next Peak サーチ 4.2, 4.2.2
Normal 4.1

O

OBW 7.1, 7.5
OBW 機能の
Standard パラメーター一覧 C-4
Offset 2.3, 2.4, 7.2
Offset Value 2.3, 2.4
Occupied Bandwidth 7.5

P

Peak Search 2.1, 4.2
Peak サーチ 4.2, 4.2.1
Point 3.2.4
Pos&Neg 3.1.4
Positive 3.1.4
Power Marker 付録 A
Power VBW 2.5.3
Pre-amp 2.4.6
Preselector 6.1, 8.1
Preselector Auto Tune 2.3, 6.1
Preselector Tune Preset 6.1
Previous Pt Level Offset 3.2.4

R

RBW 2.5, 2.5.1
Recall Limit x 3.2.3
Ref. Ext 8.6
Ref. Ext Unlock 8.6
Ref. Int 8.6
Ref. Int Unlock 8.6
Reference Clock 8.1, 8.5
Reference Clock Preset 8.5
Reference Level 2.4, 2.4.1
Resolution 4.2
RMS 3.1.4
Roll-off Factor 7.2, 7.4

S

Sample 3.1.4
Save Limit 3.2.5
Save Limit x 3.2.3
Save on Event 2.1, 3.4.1
Save then Stop 3.4.1
Scale 2.4, 2.4.3
SEM 機能の
Standard パラメーター一覧 C-5
SG Marker 5.1.1, 5.2.1
SG マーカトリガ 5.1.1, 5.2.1
Shape 3.2.5
Single 2.2
Span 2.1, 2.3
Spectrum Emission Mask 7.6
Spurious Emission 7.7
Spurious Emission 機能の
Standard パラメーター一覧 C-6
Standard 7.1
Start 2.3
Start Time 7.3
Step Size 2.3
Stop 2.3
Stop Time 7.3
Storage Count 3.1
Storage Mode 3.1
Sweep Time 3.3, 3.3.1

T

Test Trace 3.2.3
Threshold 4.2
Threshold Level 4.2
Time/Sweep 2.1, 3.3
Title 8.1
Trace 2.1, 3.1
Trace Points 3.3
Trace Type 3.1

Trigger Delay 5.1
Trigger Level 5.1
Trigger Slope 5.1
Trigger Source 5.1
Trigger Switch 5.1
Trigger/Gate 2.1, 5.1

U

Uncal Message 8.1
Update Envelope Amplitude 3.2.5

V

VBW 2.5, 2.5.2
VBW Mode 2.5
Video 5.1.1
Video VBW 2.5.3

W

Warm Up 8.3
Wide IF Video 5.1.1, 5.2.1

Z

Zero Span 2.3
Zone Center Frequency 4.1.3
Zone Width 4.1, 付録 B