

Anritsu Advancing beyond

W1 Connector™ W1 Adapter

Complete coaxial connector system with mode-free performance to 125 GHz

W1 Connectors: DC to 110 GHz

W1 Adapters: DC to 125 GHz



Table of Contents

Introduction 2
 Features 2
 Definitions..... 2
 W1 Connectors..... 3
 W1 In-Series Adapters..... 4
 W1 Cable Connector and W1 Waveguide Adapters 5
 W1 Connector Specifications 5
 W1 Adapter Specifications 5
 Materials 6
 Environmental Information 6
 Regulatory Compliance..... 6
 Tools 6

Introduction

The W1 Connector family is a complete coaxial connector system that contains male and female hermetic and non-hermetic connectors and in-series adapters. Based on the 1.00 mm coaxial connector front side interface as specified by IEEE Std 287, the W1 Connector is well suited for high frequency applications ranging from components to systems and instrumentation.

Features

- Excellent RF Performance to 110 GHz
- 50 Ω Impedance
- Low VSWR
- Standard 1 mm Interface
- Accurate Testing Capability
- Broadband Load for Instrument and Device Under Test

Definitions

	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Temperature Range	Over the 23 °C ± 5 °C temperature range.
Typical Performance	Typical specifications are not tested and are not warranted. They are generally representative of characteristic performance.
Uncertainty	A coverage factor of x1 is applied to the measurement uncertainties to facilitate comparison with other industry handheld analyzers.
Calibration Cycle	Calibration is within the recommended 12 month period (residual specifications also require calibration kit calibration cycle adherence.)
	All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com

W1 Connectors

W1-102F and W1-102M Connector Launchers


The W1 Connector launcher family includes both male and female W1 Connector configurations. The W1 Connector has an air dielectric interface similar to the K Connector™ and V Connector™. The center conductor is supported by Anritsu’s proprietary low-loss high temperature support bead on one end and a glass bead on the other end. The center conductor of the glass bead extends out of the connector back side and allows the user to make a direct pin overlap connection to the microwave circuit. The threads on the back side of the W1 Connector allow the user to install the W1 Connector by screwing it into the housing wall. Since Anritsu’s proprietary low loss high temperature plastic bead is used, the user can solder the connector into the housing to achieve a hermetic connection. For details, please refer to the W1 Connector installation procedures. Integrating the glass bead into the connector allows Anritsu to control the critical matching steps of the interface between the bead pin and the center conductor and bead pin to a microstrip or coplanar waveguide (CPW).

W1-105F and W1-105M Connector Launchers

The W1 Connector launcher family includes both male and female screw-in type connectors. The W1 Connector has an air dielectric front-side interface similar to the K Connector and V Connector. The center conductor is supported by Anritsu’s proprietary low-loss high temperature support bead on one end, and a Teflon bead on the other end to provide exceptional concentricity and rigidity to the pin on the back side. The use of a high temperature support bead allows the connector to be subjected to extended temperature ranges up to 200 °C for a short time period. A connector was subjected to 200 °C for forty-eight hours and results showed no degradation in performance. The center conductor extends outside of the connector and allows the user to make a direct pin overlap connection to the microwave circuit.




W1-102F or W1-105F, W1 Female Sparkplug Connector

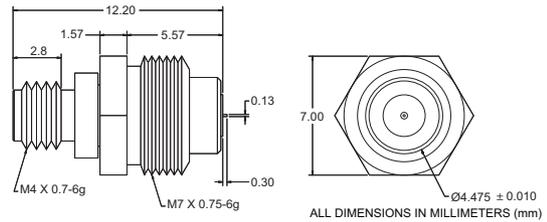

W1-102F or W1-105F, W1 Female Sparkplug Connector Outline



W1-102M or W1-105M, W1 Male Sparkplug Connector

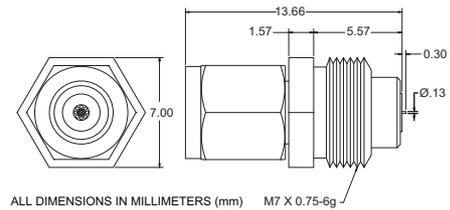


W1-102M or W1-105M, W1 Male Sparkplug Connector Outline

W1-103F Flange Mount Connector

W1 two-hole flange mount female connectors are also available. The center conductor of the connector is supported by a PPO® bead on the front-end and by a Teflon bead on the back end. The center conductor extends outside of the connector, allowing for a direct pin overlap connection to the microwave circuit.



W1-103F, W1 Female Flange Connector

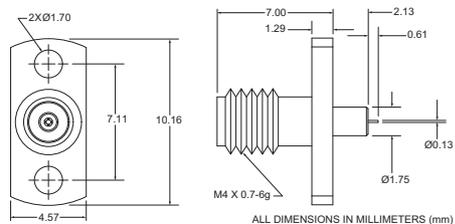

W1-103F, W1 Female Flange Connector Outline


W1 In-Series Adapters

The 33 series precision W1 adapters enable accurate measurements with the Anritsu W1 Connector (1.0 mm connector) at a broad frequency range of up to 125 GHz. The 33 series W1-W1 adapters are available in three connector configurations: Male-Male, Male-Female, and Female-Female. W1 adapters have an air dielectric interface and a center conductor that is supported by a low loss PPO® plastic bead. When used as connector savers with test ports in test systems, these adapters protect the test port by reducing the number of connections.

33WW50A, Precision W1 Male to W1 Male Adapter



33WW50A, Precision W1 Male to W1 Male Adapter

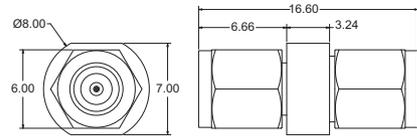


ALL DIMENSIONS IN MILLIMETERS (mm)

33WW50A, Precision W1 Male to W1 Male Adapter Outline

33WWF50A, Precision W1 Male to W1 Female Adapter



33WWF50A, Precision W1 Male to W1 Female Adapter

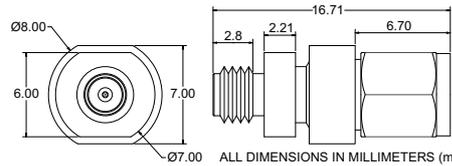


ALL DIMENSIONS IN MILLIMETERS (mm)

33WWF50A, Precision W1 Male to W1 Female Adapter Outline

33WFW50A, Precision W1 Female to W1 Female Adapter



33WFW50A, Precision W1 Female to W1 Female Adapter

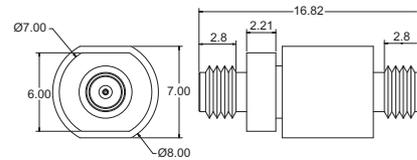

ALL DIMENSIONS IN MILLIMETERS (mm)

33WFW50A, Precision W1 Female to W1 Female Adapter Outline

W1 Cable Connector and W1 Waveguide Adapters

Both male and female cable connectors are available. W1 cable connectors use the center conductor of a UT-42 cable and are ideal for connecting two modules together or connecting the device under test to the test port head of a test instrument. Precision W1 waveguide adapters transform standard WR10 and WR8 waveguide interfaces to precision coaxial W1 Connector interfaces, thus enabling convenient millimeter wave coaxial measurements. W1-V adapters provide an interface between the W1 Connector and the V Connector and allows connections between two different connector types. Please contact Anritsu for more details on these products.

W1 Connector Specifications

W1 Connectors

Impedance	50 Ω
Frequency	DC to 110 GHz
Insertion Loss	0.70 dB typical
Return Loss	-16 dB to 110 GHz typical
Insulation Resistance	>1200 MΩ
Center Conductor Contact Resistance	6 mΩ typical
Maximum Power	CW 6 W
Backside Pin Protrusion	0.32 mm typical for W1-102F, W1-102M, W1-105F, W1-105M, 0.61 mm typical for W1-103F
Torque Coupling Nut	4 in-lb maximum
Torque	W1 Connector installation 5 in-lb maximum
Hermeticity (W1-102F, W1-102M)	1 x 10 ⁻⁸ std cc He/sec at atmosphere differential

W1 Adapter Specifications Electrical specifications given below are performance standards or limits against which the adapters are tested.

33WW50A

Connectors	W1(m) to W1(m)
Frequency Range	DC to 125 GHz
Return Loss	DC to 40 GHz 22 dB > 40 to 65 GHz 18 dB > 65 to 110 GHz 16 dB > 110 to 125 GHz 12 dB
Insertion Loss	0.7 dB max.

33WWF50A

Connectors	W1(m) to W1(f)
Frequency Range	DC to 125 GHz
Return Loss	DC to 40 GHz 22 dB > 40 to 65 GHz 18 dB > 65 to 110 GHz 16 dB > 110 to 125 GHz 12 dB
Insertion Loss	0.7 dB max.

33WFW50A

Connectors	W1(f) to W1(f)
Frequency Range	DC to 125 GHz
Return Loss	DC to 40 GHz 22 dB > 40 to 65 GHz 18 dB > 65 to 110 GHz 16 dB > 110 to 125 GHz 12 dB
Insertion Loss	0.7 dB max.

Materials

W1-102F, W1-102M

Outer Conductor	Beryllium-copper, gold plated over nickel per Mil-G-45204C
Coupling Nut for W1-102M	Passivated stainless steel
Glass Bead Center Pin	Kovar, gold plated over nickel per Mil-G-45204C
Glass Bead Outer Conductor	Kovar, gold plated over nickel per Mil-G-45204C
Glass Bead Dielectric	Corning 7070 glass
Plastic Support Bead Dielectric	Proprietary

W1-105F, W1-105M

Outer Conductor	Beryllium-copper, gold plated over nickel per Mil-G-45204C
Center Conductor	Beryllium-copper, gold plated over nickel per Mil-G-45204C
Coupling Nut for W1-105M	Passivated stainless steel
Plastic Support Bead Dielectric	Proprietary

W1-103F

Outer Conductor	Passivated stainless steel
Center Conductor	Beryllium-copper, gold plated over nickel per Mil-G-45204C
Coupling Nut for W1-103F	Passivated stainless steel
Plastic Support Bead Dielectric	Polyphenylene Oxide Noryl

33WW50A, 33WWF50A, 33WFWF50A

Outer Conductor:	Beryllium-copper, gold plated over nickel per Mil-G-45204C
Coupling Nut	Passivated stainless steel
Center Conductor	Beryllium-copper, gold plated over nickel per Mil-G-45204C
Plastic Support Bead Dielectric	Proprietary

Environmental Information (Tests per MIL-STD-202G)

Operating Temperature Range	0 °C to +85 °C (W1-102F, W1-102M, W1-105F, W1-105M, W1-103F, 33WW50A, 33WWF50A, 33WFWF50A)
Storage Temperature Range	-54 °C to +125 °C (W1-102F, W1-102M, W1-105F, W1-105M) -54 °C to +85 °C (W1-103F, 33WW50A, 33WWF50A, 33WFWF50A)
Temperature Shock	25 °C to -40 °C and 25 °C to +125 °C, method 107G, condition B
Humidity	95% at 40 °C, 96 hours, Test 103B, condition B, non-operating only
Shock	100 g _n peak sawtooth, method 213, test condition 1
Vibration	Sine wave: 10 Hz to 2000 Hz, 0.06" DA, method 204, test condition D Random: 50 Hz to 2000 Hz, 11.6 grams power spectral density 0.1 grams ² /Hz, method 214, test condition I, letter D
Salt Spray	5% concentration for 48 hours, method 101D, condition B
Dielectric Withstanding Voltage	500 VAC RMS, 60 seconds, method 301

Regulatory Compliance

W1-102F, W1-102M, W1-105F, W1-105M, W1-103F, 33WW50A, 33WWF50A, 33WFWF50A	RoHS Directive: 2011/65/EU + Amendment 2015/863
--	---

Tools

The following tools for making proper W1 connections are available.



01-504, W1-6 mm Torque Wrench



01-505, W1-6 mm or 7 mm Open end Wrench



01-506, W1-7 mm Torque Wrench

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com and search for training and education.



• United States

Anritsu Americas Sales Company
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

**Anritsu Electronics Ltd.
Americas Sales and Support**
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Brazil

Anritsu Elettronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada, Mexico, Ciudad de Mexico,
11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Ltd.
200 Capability Green,
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.
12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.
Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

• Sweden

Anritsu AB
Kistagången 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB
Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• Denmark

Anritsu A/S
c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Spain

**Anritsu EMEA Ltd.
Representation Office in Spain**
Paseo de la Castellana, 141.
Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• Austria

Anritsu EMEA GmbH
Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• United Arab Emirates

**Anritsu EMEA Ltd.
Anritsu A/S**
Office No. 164, Building 17, Dubai Internet City
P. O. Box - 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

• India

Anritsu India Private Limited
6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road,
Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.
1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre
Singapore 159303
Phone: +65-6282-2400
Fax: +65-6282-2533

• United States

Anritsu Americas Sales Company
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

**Anritsu Electronics Ltd.
Americas Sales and Support**
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Brazil

Anritsu Elettronica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada, Mexico, Ciudad de Mexico,
11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Ltd.
200 Capability Green,
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.
12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• Germany

Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.
Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

List Revision Date: 20240416