



# Spectrum Master™

## Compact Handheld Spectrum Analyzer

### MS2711E

9 kHz to 3 GHz



## Introduction

Anritsu introduces its next generation compact handheld Spectrum Analyzers to meet the needs for portability. Whether it is for spectrum monitoring, broadcast proofing, interference analysis, RF and microwave measurements, or Wi-Fi and wireless network measurements, the Spectrum Master is the ideal instrument for making fast and reliable measurements.

## Spectrum Analyzer Highlights

- Measurements: Occupied Bandwidth, Channel Power, ACPR, C/I
- Interference Analyzer: Spectrogram, Signal Strength, RSSI, Signal ID, Interference Mapping
- Dynamic Range: > 85 dB in 100 Hz RBW
- DANL: -142 dBm in 100 Hz RBW with Preamp Option
- Phase Noise: -90 dBc/Hz max @ 10 kHz offset at 1 GHz
- Frequency Accuracy: < ± 1.5 ppm, < ± 50 ppb with GPS Option 31
- PIM Hunting
- Traces: Normal, Max Hold, Min Hold, Average, # of Averages
- Detectors: Peak, Negative, Sample, Quasi-peak, and true RMS
- Markers: 6, each with a Delta Marker, or 1 Reference with 6 Deltas
- Limit Lines: up to 41 segments with one-button envelope creation
- Trace Save-on-Event: crossing limit line or sweep complete

## Capabilities and Functional Highlights

- Store 2000 Traces internally
- Internal Preamplifier Optional
- Internal Power Meter Optional
- High Accuracy Power Meter Optional
- EMF Test Optional
- 4, 6, 8, 18, 26 GHz Power Sensors
- Channel Scanner Optional
- < 5 minute warm-up time
- Touchscreen keyboard
- USB Data Transfer
- Master Software Tools
- 3 hour battery operation time
- Tracking Generator Optional

**Table of Contents**

Definitions .....	3
Spectrum Analyzer .....	4
Interference Analyzer (Option 25) .....	6
Channel Scanner (Option 27) .....	6
Preamplifier (Option 8) .....	6
Tracking Generator (Option 20) .....	6
Power Meter (Option 29) .....	7
High Accuracy Power Meter (Option 19) .....	7
GPS Receiver (Option 31) .....	7
Electromagnetic Field Test (Option 444) .....	8
AM/FM/PM Signal Analyzers (Option 509) .....	9
General Specifications .....	10
Line Sweep Tools .....	11
easyTest Tools .....	11
Master Software Tools .....	11
Ordering Information – Options .....	12
Standard Accessories .....	12
USB Power Sensors .....	13
Optional Accessories .....	13
Manuals .....	19
Troubleshooting Guides .....	19

**Definitions**

Specifications	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Warm-Up Time	After 10 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Over the $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ temperature range.
Reference Signal	When using internal reference signal.
Typical Performance	Typical specifications that are not in parenthesis are not tested and not warranted. They are generally representative of characteristic performance. Typical specifications in parenthesis () represent the mean value of measured units and do not include any guard-bands or uncertainties. They are not warranted.
Uncertainty	A coverage factor of $\times 1$ is applied to the measurement uncertainties to facilitate comparison with other industry handheld analyzers.
Calibration Cycle	Calibration is within the recommended 12 month period (residual specifications also require calibration kit calibration cycle adherence.) All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: <a href="http://www.anritsu.com">www.anritsu.com</a>



## Spectrum Analyzer

## Smart Measurements

Field Strength (Uses antenna calibration tables to measure dBm/m<sup>2</sup>, dBmV/m, dBV/m, dB $\mu$ V/m, Volt/m, Watt/m<sup>2</sup>, dBW/m<sup>2</sup>, A/m, dBA/m and Watt/cm<sup>2</sup>)  
 Occupied Bandwidth (Measures 99 % to 1 % power channel of a signal)  
 Channel Power (Measures the total power in a specified bandwidth)  
 ACPR (Adjacent Channel Power Ratio)  
 AM/FM/SSB Demodulation (Wide/narrow FM, USB, and LSB (audio out only))  
 C/I (Carrier-to-interference Ratio)  
 Emission Mask  
 PIM Hunting

## Setup Parameters

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #, Channel Increment
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
File	Save, Save-on-Event, Recall, Copy, Delete
Save	Setups, Measurements, Screen Shots (JPEG), Limit Lines, Spurious Emission Mask
Save-on-Event	Crossing Limit Line, Sweep Complete, Save-then-Stop, Clear All
Recall	Setups, Measurements, Limit Lines, Spurious Emission Mask
Copy	Selected file or files to internal/external memory (USB)
Delete	Selected file or files from internal/external memory (USB)
Application Options	Impedance (50 $\Omega$ , 75 $\Omega$ , Other)

## Sweep Functions

Sweep	Single/Continuous, Sweep Mode (Fast, Performance, No FFT), Reset, Detection, Minimum Sweep Time, Trigger Type
Detection	Peak, RMS, Negative, Sample, Quasi-peak
Triggers	Free Run, External, Video, Change Position, Manual

## Trace Functions

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A $\rightarrow$ B, B $\leftrightarrow$ C, Max Hold, Min Hold
Trace C Operations	A $\rightarrow$ C, B $\leftrightarrow$ C, Max Hold, Min Hold, A $\rightarrow$ B $\rightarrow$ C, B $\rightarrow$ A $\rightarrow$ C, Relative Reference (dB), Scale

## Marker Functions

Markers	Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off), All Markers Off
Marker Types	Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker
Marker Auto-Position	Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level
Marker Table	1-6 markers frequency and amplitude plus delta markers frequency amplitude and offset

## Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Amplitude, Points (41 max), Offset, Shape Square/Slope
Limit Line Advanced	Type (Absolute/Relative), Mirror, Save/Recall

## Frequency

Frequency Range	9 kHz to 3 GHz (tunable to 0 Hz)
Tuning Resolution	1 Hz
Frequency Reference	Aging: $\pm$ 1.0 ppm/year Accuracy: $\pm$ 1.5 ppm ( $25^{\circ}\text{C} \pm 25^{\circ}\text{C}$ ) + aging, $< \pm$ 50 ppb with GPS On
Frequency Span	10 Hz to 3 GHz including zero span
Sweep Time	Minimum 100 ms, 7 $\mu$ s to 3600 s in zero span
Sweep Time Accuracy	$\pm$ 2 % in zero span

## Bandwidth

Resolution Bandwidth (RBW)	100 Hz to 3 MHz in 1-3 sequence $\pm$ 10% (1 MHz max in zero-span) (-3 dB bandwidth)
Video Bandwidth (VBW)	10 Hz to 3 MHz in 1-3 sequence (-3 dB bandwidth) (auto or manually selectable)
RBW with Quasi-Peak Detection	200 Hz, 9 kHz, 120 kHz (-6 dB bandwidth)
VBW with Quasi-Peak Detection	Auto VBW is On, RBW/VBW = 1

 **Spectrum Analyzer** (Continued)
**Spectral Purity**

SSB Phase Noise @ 1 GHz	-90 dBc/Hz, -100 dBc/Hz typical @ 10 kHz offset -95 dBc/Hz, -102 dBc/Hz typical @ 100 kHz offset -105 dBc/Hz, -111 dBc/Hz typical @ 1 MHz offset
-------------------------	--

**Amplitude Ranges**

Dynamic Range	> 85 dB (2.4 GHz), 2/3 (TOI-DANL) in 100 Hz RBW
Measurement Range	DANL to +26 dBm ( $\geq$ 50 MHz) DANL to 0 dBm (< 50 MHz)
Display Range	1 dB to 15 dB/div in 1 dB steps, ten divisions displayed
Reference Level Range	-150 dBm to +30 dBm
Attenuator Range	0 dB to 55 dB in 5 dB steps
Maximum Continuous Input	+30 dBm
Amplitude Units	Log Scale Modes: dBW, dBm, dB $\mu$ W, dBV, dBmV, dB $\mu$ V, dBA, dBmA, dB $\mu$ A Linear Scale Modes: nV, $\mu$ V, mV, V, nW, $\mu$ W, mW, W, nA, $\mu$ A, mA, A

**Amplitude Accuracy**

9 kHz to 100 kHz	$\pm$ 2.0 dB typical (Preamp Off)
100 kHz to 3.0 GHz	$\pm$ 1.25 dB, $\pm$ 0.5 dB typical

**Displayed Average Noise Level (DANL)**

	Preamp Off (Reference Level -20 dBm)		Preamp On (Reference Level -50 dBm)	
	Maximum	Typical	Maximum	Typical
(RBW Normalized to 1 Hz, 0 dB attenuation)				
10 MHz to 2.4 GHz	-141 dBm	-146 dBm	-157 dBm	-162 dBm
> 2.4 GHz to 3 GHz	-137 dBm	-141 dBm	-154 dBm	-159 dBm
(RBW = 100 Hz, 0 dB attenuation)				
10 MHz to 2.4 GHz	-121 dBm	-126 dBm	-137 dBm	-142 dBm
> 2.4 GHz to 3 GHz	-117 dBm	-121 dBm	-134 dBm	-139 dBm

**Spurs**

Residual Spurious	< -90 dBm (RF input terminated, 0 dB input attenuation, > 10 MHz)
Input-Related Spurious	< -75 dBc (0 dB attenuation, -30 dBm input, span < 1.7 GHz, carrier offset > 4.5 MHz)
Exceptions, typical	< -70 dBc @ < 2.5 GHz, with 2072.5 MHz Input < -68 dBc @ F1 – 280 MHz with F1 Input < -70 dBc @ F1 + 190.5 MHz with F1 Input < -52 dBc @ 7349 – (2F2) MHz, with F2 Input, where F2 < 2437.5 MHz < -55 dBc @ 190.5 $\pm$ (F1/2) MHz, F1 < 1 GHz

**Third-Order Intercept (TOI)**

800 MHz	Preamp Off (-20 dBm tones 100 kHz apart, 10 dB attenuation) +16 dBm
2400 MHz	+20 dBm
200-2200 MHz	+25 dBm, typical
> 2.2 GHz to 3.0 GHz	+28 dBm, typical

**Second Harmonic Distortion**

50 MHz	Preamp Off, 0 dB input attenuation, -30 dBm input -56 dBc
> 50 MHz to 200 MHz	-60 dBc, typical
> 200 MHz to 3000 MHz	-70 dBc, typical

**VSWR**

2:1, typical

 **Interference Analyzer (Option 25)**
**Measurements**

Spectrum	Field Strength Occupied Bandwidth Channel Power Adjacent Channel Power Ratio (ACPR) AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only) Carrier-to-Interference ratio (C/I)
Spectrogram	Collect data up 72 hours
Signal Strength	Gives visual and aural indication of signal strength
Received Signal Strength Indicator (RSSI)	Collect data up to 168 hours (one week)
Signal ID	Up to 12 signals Center Frequency Bandwidth Signal Type (FM, GSM, W-CDMA, CDMA, Wi-Fi) Closest Channel Number Number of Carriers
Signal-to-Noise Ratio (SNR)	> 10 dB
Interference Mapping	Triangulate location of interference with on-display maps

 **Channel Scanner (Option 27)**
**General**

Number of Channels	1 to 20 Channels
Measurements	Graph/Table, Max Hold (On/5 s/Off), Freq/Channel, Current/Max, Single/Dual Color
Scanner	Scan Channels, Scan Frequencies, Scan Customer List, Scan Script Master™
Amplitude	Reference Level, Scale
Custom Scan	Signal Standard, Channel, # of Channels, Channel Step Size, Custom Scan
Frequency Range	100 kHz to 3 GHz
Frequency Accuracy	± 10 Hz + Time base error
Measurement Range	-110 dBm to +26 dBm
Application Options	Impedance (50 Ω, 75 Ω, Other)

**Preamplifier (Option 8)****General**

Mode	Spectrum Analyzer, Interference Analyzer, Channel Scanner
Gain	17 dB (Typical)
Frequency Range	100 kHz to 3 GHz

 **Tracking Generator (Option 20)**
**Setup Parameters**

Measure Set-up	Off/On, Output Power, Reset Sweep, Insertion Loss, Abs Max, Min, Avg (On/Off)
Insertion Loss Set-up	Normalize (Off/On), Rel Reference, Rel Scale, Transmission, Min, Avg (Off, On) RL Offset
Frequency Range	500 kHz to 3.0 GHz
Output Power Range	-50 dBm to 0 dBm
Step Size	0.1 dB nominal
Output Flatness	± 1.0 dB max, ± 0.3 dB typical (Using field calibration, relative to spectrum analyzer input with ≥ 3 dB attenuator)
Zero Span Behavior	CW Output
Output Connector	Type N female, 50 Ω
Damage Level	+ 23 dBm ± 50 VDC (limited dv/dt)

**Power Meter (Option 29)****General**

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #, Full Band
Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	Acquisition Fast/Med/Slow, # of Running Averages
Limits	Limit On/Off, Limit Upper/Lower
Frequency Range	10 MHz to 3 GHz
Span	1 kHz to 100 MHz
Display Range	-140 dBm to +30 dBm, ≤ 40 dB span
Measurement Range	-120 dBm to +26 dBm
Offset Range	0 dB to +100 dB (External Gain or Loss)
VSWR	2:1 typical
Maximum Power	+30 dBm without attenuator
Accuracy	Same as Spectrum Analyzer
Application Options	Impedance (50 Ω, 75 Ω, Other)

**High Accuracy Power Meter (Option 19) (requires external USB Power Sensor)**

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale				
Average	# of Running Averages, Max Hold				
Zero/Cal	Zero On/Off, Cal Factor (Center Frequency, Signal Standard)				
Limits	Limit On/Off, Limit Upper/Lower	MA24105A	MA24106A	MA24108A/18A/26A	MA24208A/18A
Power Sensor Model	Inline High Power Sensor	High Accuracy RF Power Sensor	Microwave USB Power Sensor	Microwave Universal USB Power Sensor	Microwave CW USB Power Sensor
Frequency Range	350 MHz to 4 GHz	50 MHz to 6 GHz	10 MHz to 8/18/26 GHz	10 MHz to 8/18 GHz	10 MHz to 33/40/50 GHz
Connector	Type N(f), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω (8/18 GHz)	Type N(m), 50 Ω (26 GHz)	Type K(m), 50 Ω (33/40 GHz)
					Type V(m), 50 Ω (50 GHz)
Dynamic Range	+3 dBm to +51.76 dBm (2 mW to 150 W)	-40 dBm to +23 dBm (0.1 μW to 200 mW)	-40 dBm to +20 dBm (0.1 μW to 100 mW)	-60 dBm to +20 dBm (1 nW to 100 mW)	-70 dBm to +20 dBm (0.1 nW to 100 mW)
Measurand	True-RMS	True-RMS	True-RMS, Slot Power, Burst Average Power	True-RMS, Slot Power, Burst Average Power	Average Power
Measurement Uncertainty	± 0.17 dB <sup>a</sup>	± 0.16 dB <sup>b</sup>	± 0.18 dB <sup>c</sup>	± 0.17 dB <sup>d</sup>	± 0.17 dB <sup>e</sup>
Data sheet (for complete specifications)	11410-00621	11410-00424	11410-00504	11410-00841	11410-00906
Notes:	<p>a. Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor.</p> <p>b. Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.</p> <p>c. Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.</p> <p>d. Power uncertainty expressed with two sigma confidence level for CW measurement after zero operation. Includes calibration factor and linearity over temperature uncertainties, but not the effects of mismatch, zero set and drift, or noise.</p> <p>e. Includes linearity over temperature uncertainties, but not the effects of calibration factor, mismatch, zero set and drift, and noise.</p>				

**GPS Receiver (Option 31) (requires external GPS antenna, sold separately)****General**

Setup	On/Off, Antenna Voltage 3.3/5.0 V, GPS Info
GPS Time/Location Indicator	Time, Latitude, Longitude and Altitude on display
	Time, Latitude, Longitude and Altitude with trace storage
High Frequency Accuracy	Spectrum Analyzer, Interference Analyzer, CW Signal Analyzers ≤ ± 50 ppb with GPS On, GPS antenna connected, 3 minutes after satellite lock in selected mode
Connector	SMA, Female



## Electromagnetic Field Test (Option 444)

### Measurements

Setup	Limit lines, axis dwell time, measurement time, auto-logging, measurement units, trace display
Measurements	Field strength is measured
Units	dBm/m <sup>2</sup> , dBV/m, dBmV/m, dBuV/m, V/m, W/m <sup>2</sup> , dBW/m <sup>2</sup> , A/m, dBA/m, W/cm <sup>2</sup>
Results	Maximum, minimum, and average of all measurements conducted
Display	Measurement status, number of measurements taken, pass/fail indicators

### Frequency Range

#### Supported Antenna

2000-1800-R	9 kHz to 300 MHz
2000-1792-R	30 MHz to 3 GHz
2000-1791-R	700 MHz to 3 GHz

### EMF Measurement Modes

Spectrum Analyzer

 AM/FM/PM Signal Analyzers (Option 509)

## Measurements

Display Type	RF Spectrum AM/FM/PM	Audio Spectrum (AM)	Audio Spectrum (FM/PM)	Audio Waveform (AM)	Audio Waveform (FM/PM)	Summary (AM)	Summary (FM/PM)
Graphic Display	Power (dBm) vs. Frequency	Depth (%) vs. Modulation Frequency	Deviation (kHz/rad) vs. Modulation Frequency	Depth (%) vs. Time	Deviation (kHz/rad) vs. Time	None	None
Numerical Displays	Carrier Power Carrier Frequency Occupied Bandwidth	AM Rate RMS Depth (Pk-Pk)/2 Depth SINAD* THD* Distortion/Total Vrms*	FM/PM Rate RMS Depth (Pk-Pk)/2 Depth SINAD* THD* Distortion/Total Vrms*	AM Rate RMS Depth (Pk-Pk)/2 Depth SINAD* THD* Distortion/Total Vrms*	FM/PM Rate RMS Depth (Pk-Pk)/2 Depth SINAD* THD* Distortion/Total Vrms*	RMS Depth (AM) Peak + Depth Peak - Depth (Pk-Pk)/2 Depth Carrier Power Carrier Frequency Occupied Bandwidth AM Rate SINAD* THD* Distortion/Total Vrms*	RMS Deviation (FM/PM) Peak + Depth Peak - Depth (Pk-Pk)/2 Depth Carrier Power Carrier Frequency Occupied Bandwidth AM Rate SINAD* THD* Distortion/Total Vrms*

\* Requires Sinewave modulation

## Setup Parameters

Frequency	Center Freq, Span, Freq Step, Signal Standard, Channel, Channel Increment, Set Carrier Freq
Amplitude	Scale, Power Offset, Adjust Range
Setup	Demod Type (AM, FM, PM), IFBW, Auto IFBW
Measurements	RF Spectrum AM/FM/PM, Audio Spectrum (AM/FM/PM), Audio Waveform (AM/FM/PM), Summary (AM/FM/PM), Average
Marker	On/Off, Delta, Peak Search, Marker Freq to Center, Marker to Ref Lvl, Marker Table, All Markers Off

## Specifications

AM	Modulation Rate: $\pm 1$ Hz (< 100 Hz), $\pm 2$ % (> 100 Hz) Depth: $\pm 5$ % for (Modulation rates 10 Hz to 100 kHz)
FM	Modulation Rate: $\pm 1$ Hz (< 100 Hz); $\pm 2$ % (100 Hz to 100 kHz) Deviation Accuracy: $\pm 5$ % (100 Hz to 100 kHz, IFBW must be greater than 95 % occupied BW)
PM	Modulation Rate: $\pm 1$ Hz (< 100 Hz); $\pm 2$ % (100 Hz to 100 kHz) Deviation Accuracy: $\pm 5$ % (deviation 0 to 93 Rad, rate 10 Hz to 5 kHz, IFBW must be greater than 95 % occupied BW)
IF bandwidth	1 kHz to 300 kHz in 1-3 sequence
Frequency Span	RF Spectrum: 10 kHz to 10 MHz Audio Spectrum: 2 kHz, 5 kHz, 10 kHz, 20 kHz, 70 kHz, 140 kHz
RBW/VBW	30
Span/RBW	100
Sweep time	50 $\mu$ s to 50 ms (Audio Waveform)

**General Specifications**

<b>System Parameters</b>		
System	System	Status (Temperature, Battery Info, Serial Number, Firmware Version, Options Installed) Self Test, Application Self Test GPS (see Option 31)
System Options	System Options	Name, Date and Time, Brightness, Volume Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, Russian, Portuguese) Reset (Factory Defaults, Master Reset, Update Firmware)
Internal Trace/Setup Memory	Internal Trace/Setup Memory	2,000 traces, 2,000 Setups
External Trace/Setup Memory	External Trace/Setup Memory	Limited by size of USB Flash drive
Mode Switching	Mode Switching	Auto-Stores/Recalls most recently used Setup Parameters in the Mode
<b>File Management</b>		
File Types	File Types	Vary with measurement mode
File	File	Save, Recall, Copy, Delete
Save	Save	Setups, Measurements, Screen Shots (JPEG)
Recall	Recall	Setups, Measurements
Copy	Copy	Selected file or files to internal/external memory (USB)
Delete	Delete	Selected file or files from internal/external memory (USB)
File Sort Method	File Sort Method	By Name/Date/Type, Ascend/Descend
<b>Connectors</b>		
RF Out	RF Out	Type N, female, 50 Ω
RF Out Damage Level	RF Out Damage Level	23 dBm, ± 50 VDC
RF In	RF In	Type N, female, 50 Ω
RF In Damage Level	RF In Damage Level	+33 dBm peak, ± 50 VDC, Maximum Continuous Input ( $\geq$ 10 dB attenuation)
GPS	GPS	SMA(f)
External Power	External Power	5.5 mm barrel connector, 11.0 to 14.5 VDC, < 4.0 Amps
USB Interface (2)	USB Interface	Type A, Connect USB Flash Drive and Power Sensor
USB Interface	USB Interface	5-pin mini-B, Connect to PC for data transfer
Headset Jack	Headset Jack	3.5 mm mini-phone plug
External Reference In	External Reference In	BNC, female, 50 Ω, Maximum Input +10 dBm, 1 MHz, 5 MHz, 10 MHz, 13 MHz
External Trigger	External Trigger	BNC, female, 50 Ω, Maximum Input ± 5 VDC
<b>Display</b>		
Type	Type	Resistive Touchscreen
Size	Size	8.4 inch daylight viewable color LCD
Resolution	Resolution	800 x 600
Pixel Defects	Pixel Defects	No more than five defective pixels (99.9989% good pixels)
<b>Battery</b>		
Type	Type	Li-Ion
Battery Operation	Battery Operation	3.0 hours, typical
Battery Charging Limits	Battery Charging Limits	0 °C to +45 °C, Relative Humidity $\leq$ 80 %
<b>Regulatory Compliance</b>		
European Union	European Union	EMC 2014/30/EU, EN 61326-1:2013; CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU; Safety EN 61010-1:2010; RoHS Directive 2011/65/EU + 2015/863
United Kingdom	United Kingdom	EMC SI 2016/1091; BS EN 55011 & BS 61000-4-2/3/4/5/6/8/11 Consumer Protection (Safety) SI 2016/1101; BS EN 61010-1:2010 Environmental Protection SI 2012/3032;2011/65/EU & 2015/863
Australia and New Zealand	Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	South Korea	KCC-REM-A21+-0004
Canada	Canada	ICES-1(A)/NMB-1(A)
<b>Environmental</b>		
Operating Temperature Range	MIL-PRF-28800F Class 2	
Storage Temperature Range	-10 °C to 55 °C	
Maximum Relative Humidity	-51 °C to 71 °C	
Vibration, Sinusoidal	95 % RH at 30 °C, non-condensing	
Vibration, Random	5 Hz to 55 Hz	
Half Sine Shock	10 Hz to 500 Hz	
Altitude	30 g <sub>n</sub>	
Explosive Atmosphere	4600 meters, operating and non-operating	
	MIL-PRF-28800F Section 4.5.6.3; MIL-STD-810G, Method 511.5, Procedure 1	
<b>ESD</b>		
RF Input Pin	RF Input Pin	Withstands up to ± 15 kV
<b>Size and Weight</b>		
Size	Size	273 mm x 199 mm x 91 mm (10.7 in x 7.8 in x 3.6 in)
Weight	Weight	3.45 kg (7.6 lb)
<b>Warranty</b>		
Duration	Duration	Standard three-year warranty One-year warranty on battery

**Line Sweep Tools** (for your PC)

<b>Trace Capture</b>	
Browse to Instrument	View and copy traces from the test equipment to your PC using Windows Explorer
Open Legacy Files	Open DAT files captured with Hand Held Software Tools v6.61
Open Current Files	Open VNA or DAT files
Capture plots To	The Line Sweep Tools screen, DAT files, Database, or JPEG
<b>Traces</b>	Trace Types Trace Formats
	Return Loss, VSWR, DTF-RL, DTF-VSWR, Cable Loss, Smith Chart, and PIM DAT, VNA, CSV, PNG, BMP, JPG, HTML, Data Base, and PDF
<b>Report Generation</b>	
Report Generator	Includes GPS location along with measurements
Report Format	Create reports in HTML or PDF format
Report Setup	Report Title, Company, Prepared for, Location, Date and Time, Filename, Company logo
Trace Setup	1 trace Portrait Mode, 2 Trace Portrait Mode, 1 Trace Landscape Mode
<b>Trace Validation</b>	
Presets	7 presets allow "one click" setting of up to 6 markers and one limit line
Marker Controls	6 regular Markers, Marker Peak, Marker valley, Marker between, and frequency entry
Delta Markers	6 Delta markers
Limit Line	Enable and drag or value entry. Also works with presets
Next Trace Button	Next Trace and Previous trace arrow keys allow quick switching between traces
<b>Tools</b>	Cable Editor Distance to Fault Measurement Calculator Signal Standard Editor Renaming Grid
	Allows creation of custom cable parameters Converts a Return Loss trace to a Distance to Fault trace Converts Real, Imaginary, Magnitude, Phase, RL, VSWR, Rho, and Transmit power Creates new band and channel tables 36 user definable phrases for creation of file names, trace titles, and trace subtitles
<b>Connectivity</b>	Connections
	USB cable, USB Memory Stick

**easyTest Tools** (for your PC)

<b>Instrument Mode</b>	
	Spectrum Analyzer
<b>Commands</b>	
Display Image	Allows putting a custom image on the instrument screen
Recall Setup	Places the instrument into a known state
Prompt	Displays instructional messages on the instrument screen
Save	Allows automatic or manual saving of traces

**Master Software Tools** (for your PC)

<b>Mapping</b> (GPS Required)	
Spectrum Analyzer Mode	MapInfo, MapPoint
<b>Folder Spectrogram</b> (Spectrum Monitoring for Interference Analysis and Spectrum Clearing)	
Folder Spectrogram – 2D View	Creates a composite file of multiple traces Peak Power, Total Power, Peak Frequency, Histogram, Average Power (Max/Min) File Filter (Violations over limit lines or deviations from averages) Playback
Video Folder Spectrogram – 2D View	Create AVI file to export for management review/reports
Folder Spectrogram – 3D View	Views (Set Threshold, Markers) - 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID) - Playback (Frequency and/or Time Domain)
<b>List/Parameter Editors</b>	
Traces	Add, delete, and modify limit lines and markers
Product Updates	Auto-checks Anritsu website for latest revision firmware
Pass/Fail	Create, download, or edit Signal Analysis Pass/Fail Limits
Languages	Add custom language and modify non-English language menus
<b>Script Master™</b>	
Channel Scanner Mode	Automate scan up to 1200 channels, repeat for sets of 20 channels, repeat all channels
<b>Connectivity</b>	Connections
	Connect to PC using USB

## Ordering Information – Options

<b>MS2711E</b>	<b>Description</b>
	9 kHz to 3 GHz Spectrum Analyzer
<b>Options</b>	
	MS2711E-0008 Preamplifier
	MS2711E-0020 Tracking Generator
	MS2711E-0031 GPS Receiver (requires external GPS antenna, sold separately)
	MS2711E-0019 High-Accuracy Power Meter (requires External Power Sensor)
	MS2711E-0029 Power Meter
	MS2711E-0025 Interference Analyzer (Option 31 recommended)
	MS2711E-0027 Channel Scanner
	MS2711E-0444 EMF Measurements (requires Anritsu Isotropic Antenna)
	MS2711E-0509 AM/FM/PM Analyzer
MS2711E-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate.
MS2711E-0099	Premium Calibration to ISO17025 and ANSI/NCSL Z540-1. Includes calibration certificate, test report, and uncertainty data.

## Standard Accessories (included with instrument)

<b>Accessory</b>	<b>Description</b>
	2000-1654-R Soft Carrying Case
	2000-1691-R Stylus with Coiled Tether
	633-75 Rechargeable Li-Ion Battery, 7500 mAh
	40-187-R AC-DC Adapter with AC power cord (country dependent)

<b>Accessory</b>	<b>Description</b>
	806-141-R Automotive Power Adapter, 12 VDC, 60 W
	3-2000-1498 USB A/5-pin mini-B Cable, 10 ft
	2000-1797-R Screen Protector Film 8.4 in (one factory installed, one spare)

**USB Power Sensors** (for complete ordering information, see the respective data sheets of each sensor)

Accessory	Description	Accessory	Description
MA24330A	Microwave CW USB Power Sensor, 10 MHz to 33 GHz, +20 dBm	MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm to -40 dBm
			
MA24340A	Microwave CW USB Power Sensor, 10 MHz to 40 GHz, +20 dBm	MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm to -40 dBm
MA24350A	Microwave CW USB Power Sensor, 10 MHz to 50 GHz, +20 dBm	MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm to -40 dBm
MA24208A	Microwave Universal USB Power Sensor, 10 MHz to 8 GHz, +20 dBm to -60 dBm	MA24105A	Inline Dual Directional High Power Sensor, 350 MHz to 4 GHz, +3 dBm to +51.76 dBm
			
MA24218A	Microwave Universal USB Power Sensor, 10 MHz to 18 GHz, +20 dBm to -60 dBm	MA25100A	RF Power Indicator
MA24106A	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +23 dBm to -40 dBm		

**Optional Accessories**

Backpack and Transit Case		Accessory	Description
	67135	Anritsu Backpack (for Handheld Instrument and PC)	
	760-243-R	Large Transit Case with Wheels and Handle 56 cm x 45.5 cm x 26.5 cm (22.07" x 17.92" x 10.42")	
	760-286-R	Compact Transit Case with Wheels and Handle 55.6 cm x 35.5 cm x 22.9 cm (21.89" x 13.98" x 9.01")	
		Accessory	Description
		760-261-R	Large Transit Case with Wheels and Handle 63.1 cm x 50 cm x 30 cm (24.83" x 19.69" x 11.88"), space for MA2700A, antennas, filters, instrument inside soft case, and other interference hunting accessories/tools
		760-262-R	Transit Case for MA2700A, holds several Yagi antennas and filters/port extender 96.8 x 40.6 x 15.5 cm (38.12" x 16.00" x 6.12")
		760-271-R	Transit Case for Portable Directional Antennas and Port Extender 52.4 cm x 42.8 cm x 20.6 cm (20.62" x 16.87" x 8.12") (for 2000-1777-R, 2000-1778-R, 2000-1779-R, 2000-1798-R)

## Spectrum Master

## Technical Data

### Miscellaneous Accessories

Accessory	Description
	2000-1374-R External Dual Charger for Li-Ion Batteries
	MA2700A Handheld Interference Hunter (For full specifications, refer to the MA2700A Technical Data Sheet 11410-00692)
<b>GPS Antennas (active)</b>	
	2000-1528-R Magnet Mount, SMA(m) with 5 m (16.4 ft) cable, requires 5 VDC
	2000-1652-R Magnet Mount, SMA(m) with 0.3 m (1 ft) cable, requires 3.3 VDC or 5 VDC

### Accessory      Description

	MA25401A Atomic Clock External 10 MHz Frequency Reference (see MA25401A Technical Data Sheet, PN: 11410-01134 for details)
	2000-1689-R EMI Near Field Probe Kit

### Accessory      Description

	2000-1760-R Miniature Antenna, SMA(m), requires 2.5 VDC to 3.7 VDC
---	---

## Technical Data

## Spectrum Master

Directional Antennas		Accessory	Description
	2000-1411-R 824 MHz to 896 MHz, N(f), 12.3 dBi, Yagi		2000-1726-R Antenna, 2500 MHz to 2700 MHz, N(f), 14.1 dBi, Yagi
	2000-1412-R 885 MHz to 975 MHz, N(f), 12.6 dBi, Yagi		2000-1747-R Antenna, Log Periodic, 300 MHz to 7000 MHz, N(f), 5.1 dBi, typical
	2000-1413-R 1710 MHz to 1880 MHz, N(f), 12.3 dBi, Yagi		2000-1748-R Antenna, Log Periodic, 1 GHz to 18 GHz, N(f), 6 dBi, typical
	2000-1414-R 1850 MHz to 1990 MHz, N(f), 11.4 dBi, Yagi		2000-1777-R Portable Directional Antenna, 9 kHz to 20 MHz, N(f) (requires port extender 2000-1798-R when used with MA2700A)
	2000-1415-R 2400 MHz to 2500 MHz, N(f), 14.1 dBi, Yagi		2000-1778-R Portable Directional Antenna, 20 MHz to 200 MHz, N(f) (requires port extender 2000-1798-R when used with MA2700A)
	2000-1416-R 1920 MHz to 2170 MHz, N(f), 14.3 dBi, Yagi		2000-1779-R Portable Directional Antenna, 200 MHz to 500 MHz, N(f) (requires port extender 2000-1798-R when used with MA2700A)
	2000-1659-R 698 MHz to 787 MHz, N(f), 10.1 dBi, Yagi		2000-1812-R Portable Yagi Antenna, 450 MHz to 512 MHz, N(f), 7.1 dBi
	2000-1660-R 1425 MHz to 1535 MHz, N(f), 14.3 dBi, Yagi		2000-1825-R Portable Yagi Antenna, 380 MHz to 430 MHz, N(f), 7.1 dBi
	2000-1715-R Directional Antenna, 698 MHz to 2500 MHz, N(f), gain of 2 dBi to 10 dBi, typical		2000-1798-R Port Extender, DC to 6 GHz

## Spectrum Master

## Technical Data

Portable Antennas	
Accessory	Description
	2000-1200-R 806 MHz to 866 MHz, SMA(m), 50 Ω
	2000-1473-R 870 MHz to 960 MHz, SMA(m), 50 Ω
	2000-1035-R 896 MHz to 941 MHz, SMA(m), 50 Ω (1/2 wave)
	2000-1030-R 1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
	2000-1474-R 1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
	2000-1031-R 1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)

Mag Mount and Broadband Antennas	
Accessory	Description
	2000-1616-R 20 MHz to 21000 MHz, N(f), 50 Ω
	2000-1645-R 694 MHz to 894 MHz, 3 dBi peak gain 1700 MHz to 2700 MHz, 3 dBi peak gain, N(m), 50 Ω, 10 ft
	2000-1646-R 750 MHz to 1250 MHz, 3 dBi peak gain, 1650 MHz to 2000 MHz, 5 dBi peak gain, 2100 MHz to 2700 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft

Isotropic Antennas	
Accessory	Description
	2000-1800-R Isotropic Antenna, H-Field, 9 kHz to 300 MHz
	2000-1792-R Isotropic Antenna, E-Field, 30 MHz to 3 GHz

Accessory	Description
	2000-1475-R 1920 MHz to 1980 MHz and 2110 MHz to 2170 MHz, SMA(m), 50 Ω
	2000-1032-R 2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
	2000-1751-R 698 MHz to 960 MHz, 1710 MHz to 2100 MHz, 2500 MHz to 2700 MHz, SMA(m), 2 dB, typical, 50 Ω
	2000-1361-R 2400 MHz to 2500 MHz, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
	2000-1636-R Antenna Kit (Consists of: 2000-1030-R, 2000-1031-R, 2000-1032-R, 2000-1200-R, 2000-1035-R, 2000-1361-R, and carrying pouch)

Accessory	Description
	2000-1648-R 1700 MHz to 6000 MHz, 3 dBi peak gain, N(m), 50 Ω, 10 ft
	2000-1946-R Cable 1: 617 MHz to 960 MHz, 3 dBi peak gain, 1710 MHz to 3700 MHz, 4 dBi peak gain, N(m), 50 Ω, 10 ft Cable 2: 3000 MHz to 6000 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft
	2000-1647-R Cable 1: 698 MHz to 1200 MHz, 2 dBi peak gain, 1700 MHz to 2700 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 2: 3000 MHz to 6000 MHz, 5 dBi peak gain, N(m), 50 Ω, 10 ft Cable 3: GPS 26 dB gain, SMA(m), 50 Ω, 10 ft

Accessory	Description
	2000-1791-R Isotropic Antenna, E-Field, 0.7 GHz to 6 GHz

## Technical Data

## Spectrum Master

### Bandpass Filters

Accessory	Description
1030-114-R	806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω
1030-109-R	824 MHz to 849 MHz, N(m) to SMA(f), 50 Ω
1030-110-R	880 MHz to 915 MHz, N(m) to SMA(f), 50 Ω
1030-111-R	1850 MHz to 1910 MHz, N(m) to SMA(f), 50 Ω
1030-112-R	2400 MHz to 2484 MHz, N(m) to SMA(f), 50 Ω
1030-105-R	890 MHz to 915 MHz, N(m) to N(f), 50 Ω
1030-106-R	1710 MHz to 1790 MHz, N(m) to N(f), 50 Ω
1030-107-R	1910 MHz to 1990 MHz, N(m) to N(f), 50 Ω
1030-149-R	High Pass, 150 MHz, N(m) to N(f), 50 Ω
1030-150-R	High Pass, 400 MHz, N(m) to N(f), 50 Ω
1030-151-R	High Pass, 700 MHz, N(m) to N(f), 50 Ω
1030-152-R	Low Pass, 200 MHz, N(m) to N(f), 50 Ω
1030-153-R	Low Pass, 550 MHz, N(m) to N(f), 50 Ω
1030-155-R	2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω
1030-178-R	1920 MHz to 1980 MHz, N(m) to N(f), 50 Ω
1030-179-R	777 MHz to 798 MHz, N(m) to N(f), 50 Ω
1030-180-R	2500 MHz to 2570 MHz, N(m) to N(f), 50 Ω



### Adapters

Accessory	Description
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω



### Accessory

Accessory	Description
2000-1734-R	699 MHz to 715 MHz, N(m) and N(f), 50 Ω
2000-1735-R	776 MHz to 788 MHz, N(m) and N(f), 50 Ω
2000-1736-R	815 MHz to 850 MHz, N(m) and N(f), 50 Ω
2000-1737-R	1711 MHz to 1756 MHz, N(m) and N(f), 50 Ω
2000-1738-R	1850 MHz to 1910 MHz, N(m) and N(f), 50 Ω
2000-1739-R	880 MHz to 915 MHz, N(m) and N(f), 50 Ω
2000-1740-R	1710 MHz to 1785 MHz, N(m) and N(f), 50 Ω
2000-1741-R	1920 MHz to 1980 MHz, N(m) and N(f), 50 Ω
2000-1742-R	832 MHz to 862 MHz, N(m) and N(f), 50 Ω
2000-1743-R	2500 MHz to 2570 MHz, N(m) and N(f), 50 Ω
2000-1799-R	2305 MHz to 2320 MHz, N(m) and N(f), 50 Ω
2000-1684-R	791 MHz to 821 MHz, N(m) to N(f), 50 Ω



### Accessory

Accessory	Description
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-172-R	BNC(f) to N(m), DC to 1.3 GHz, 50 Ω
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle



# Spectrum Master

# Technical Data

## Precision Adapters

Accessory	Description
	34NN50A N(m) to N(m), DC to 18 GHz, 50 Ω

## Attenuators

Accessory	Description
	1010-121-R Attenuator, 40 dB, 100 W, DC to 8 GHz, N(f) to N(m) Uni-directional
	3-1010-122 20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
	3-1010-123 30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
	3-1010-124 Attenuator, 40 dB, 100 W, DC to 8.5 GHz, N(f) to N(m), Uni-directional

## Phase-Stable Test Port Cables, Armored w/Reinforced Grip

Accessory	Description
15RDN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
	15RDFN50-1.5-R 1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15RDFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω

## Phase-Stable Test Port Cables, Armored

Accessory	Description
15NNF50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
	15NNF50-1.5C 1.5 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15NNF50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NNF50-5.0C	5.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NNF50-5.0C	5.0 m, DC to 6 GHz, N(m) to N(m), 50 Ω

## Accessory      Description

	34NFNF50 N(f) to N(f), DC to 18 GHz, 50 Ω
---	--

## Accessory      Description

	42N50-20 20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
---	--

	42N50A-30 30 dB, 50 W, DC to 18 GHz, N(m) to N(f)
---	--

	1010-127-R 30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
---	---


	1010-128-R 40 dB, 150 W, DC to 3 GHz, N(m) to N(f)
--	---

(recommended for cable & antenna line sweep applications)

Accessory	Description
15RNFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
	15RNFN50-3.0-R 3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω

(recommended for use with tightly spaced connectors and other general purpose applications)


Accessory	Description
15NDF50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
	15ND50-1.5C 1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω

<b>NEON® MA8100A Signal Mapper</b>	
<b>Accessory</b>	<b>Description</b>
MA8100A-000	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 3 months NEON Software License with 3 months of maintenance and support and 3 months of Cloud Service (PN: 2300-607).
MA8100A-001	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 1 year NEON Software License with 1 year of maintenance and support and 1 year of Cloud Service (PN: 2300-574).
	MA8100A-003 NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 3 year NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service (PN: 2300-575).
MA8100A-005	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes 5 year NEON Software License with 5 years of maintenance and support and 5 years of Cloud Service (PN: 2300-576).
MA8100A-100	NEON Signal Mapper with Anritsu Integration and Tracking Unit. Includes Perpetual NEON Software License with 3 years of maintenance and support and 3 years of Cloud Service (PN: 2300-606).
2000-1852-R	NEON Tracking Unit (includes USB cable and belt clip, Worldwide version)
2000-2015-R	NEON Tracking Unit (includes USB cable and belt clip, Japan version)
2000-1853-R	Belt clip (for NEON Tracking Unit)

## Manuals (available at [www.anritsu.com](http://www.anritsu.com))

<b>Part Number</b>	<b>Description</b>
10100-00065	Product Information, Compliance, and Safety
10580-00328	Spectrum Master User Guide
10580-00349	Spectrum Analyzer Measurement Guide
10580-00240	Power Meter Measurement Guide
10580-00339	Tracking Generator Measurement Guide
10580-00455	EMF Measurement Guide
10580-00256	Programming Manual

## Troubleshooting Guides (available at [www.anritsu.com](http://www.anritsu.com))

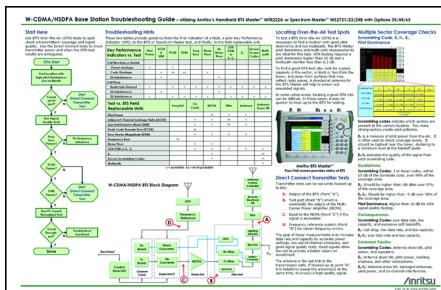

<b>Part Number</b>	<b>Description</b>
11410-00551	Spectrum Analyzers
11410-00472	Interference

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com](http://www.anritsu.com) and search for training and education.



### • United States

**Anritsu Americas Sales Company**  
450 Century Parkway, Suite 190,  
Allen, TX 75013, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

### • Canada

**Anritsu Electronics Ltd.**  
700 Silver Seven Road, Suite 120,  
Kanata, Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

**Anritsu Eletronica Ltda.**  
Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - São Paulo - SP, Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

**Anritsu Company, S.A. de C.V.**  
Blvd Miguel de Cervantes Saavedra #169 Piso 1,  
Col. Granada, Mexico, Ciudad de Mexico,  
11520, MEXICO  
Phone: +52-55-4169-7104

### • United Kingdom

**Anritsu EMEA Ltd.**  
200 Capability Green,  
Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

**Anritsu S.A.**  
12 avenue du Québec, Immeuble Goyave,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50

### • Germany

**Anritsu GmbH**  
Nemetschek Haus, Konrad-Zuse-Platz 1,  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

**Anritsu S.r.l.**  
Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy  
Phone: +39-6-509-9711

### • Sweden

**Anritsu AB**  
Kistagången 20 B, 2 tr, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00

### • Finland

**Anritsu AB**  
Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5.),  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100

### • Denmark

**Anritsu A/S**  
c/o Regus Winghouse, Ørestads Boulevard 73, 4th  
floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

### • Russia

**Anritsu EMEA Ltd.**  
**Representation Office in Russia**  
Tverskaya str. 16/2, bld. 1, 7th floor,  
Moscow 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

**Anritsu EMEA Ltd.**  
**Representation Office in Spain**  
Paseo de la Castellana, 141.  
Planta 5, Edificio Cuzco IV  
28046, Madrid, Spain  
Phone: +34-91-572-6761

### • Austria

**Anritsu EMEA GmbH**  
Am Belvedere 10, A-1100 Vienna, Austria  
Phone: +43-(0)1-717-28710

### • United Arab Emirates

**Anritsu EMEA Ltd.**  
**Anritsu A/S**  
Office No. 164, Building 17, Dubai Internet City  
P. O. Box - 501901, Dubai, United Arab Emirates  
Phone: +971-4-3758479

### • India

**Anritsu India Private Limited**  
6th Floor, Indiqueb ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road,  
Bengaluru - 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

### • Singapore

**Anritsu Pte. Ltd.**  
11 Chang Charn Road, #04-01, Shiro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • Vietnam

**Anritsu Company Limited**  
16th Floor, Peakview Tower, 36 Hoang Cau Street,  
O Chо Dua Ward, Dong Da District, Hanoi, Vietnam  
Phone: +84-24-3201-2730

### • P.R. China (Shanghai)

**Anritsu (China) Co., Ltd.**  
Room 2701-2705, Tower A, New Caohejing  
International Business Center No. 391 Gui Ping Road  
Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

**Anritsu Company Ltd.**  
Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

**Anritsu Corporation**  
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016  
Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • South Korea

**Anritsu Corporation, Ltd.**  
5FL, 235 Pangyoek-ro, Bundang-gu, Seongnam-si,  
Gyeonggi-do 13494, South Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

**Anritsu Pty. Ltd.**  
Unit 20, 21-35 Ricketts Road,  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

**Anritsu Company Inc.**  
7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

List Revision Date: 20210610

Data subject to change without notice.  
For the most recent specifications, visit: [www.anritsu.com](http://www.anritsu.com).

20 of 20

MS2711E TDS, PN: 11410-00597, Rev. AD  
Copyright November 2022, Anritsu Company, USA. All Rights Reserved.  
© Anritsu All trademarks are registered trademarks of their respective companies.  
Anritsu utilizes recycled paper and environmentally conscious inks and toner.