

Anritsu envision : ensure

ShockLine™ Performance Vector Network Analyzers

MS46522B

50 kHz to 43.5 GHz



Introduction

The MS46522B is part of the ShockLine family of Vector Network Analyzers from Anritsu. It is a high performance, 3U high, 2-port VNA available in broadband frequency ranges from 50 kHz to 43.5 GHz and a banded E-band option covering the 55 GHz to 92 GHz frequency range. It is capable of measuring s-parameters and time domain characteristics of passive RF devices.

The VNA supports SCPI command programming and has software driver support for the most common programming environments. The MS46522B uses industry standard LAN communications for robust remote control in test applications. ShockLine VNAs provide a powerful graphical user interface for manual testing of devices. A full-featured user interface is enabled by attaching a (user-supplied) touchscreen monitor, keyboard, and mouse.

This document provides detailed specifications for the MS46522B Vector Network Analyzers (VNAs) and related options.

Instrument Models and Operating Frequencies

Base Model


- MS46522B, 2-Port ShockLine VNA

Requires one Frequency Option

- MS46522B-010, 50 kHz to 8.5 GHz
- MS46522B-020, 50 kHz to 20 GHz
- MS46522B-040, 50 kHz to 43.5 GHz
- MS46522B-082, 55 GHz to 92 GHz

Principal Options

- MS46522B-002, Time Domain

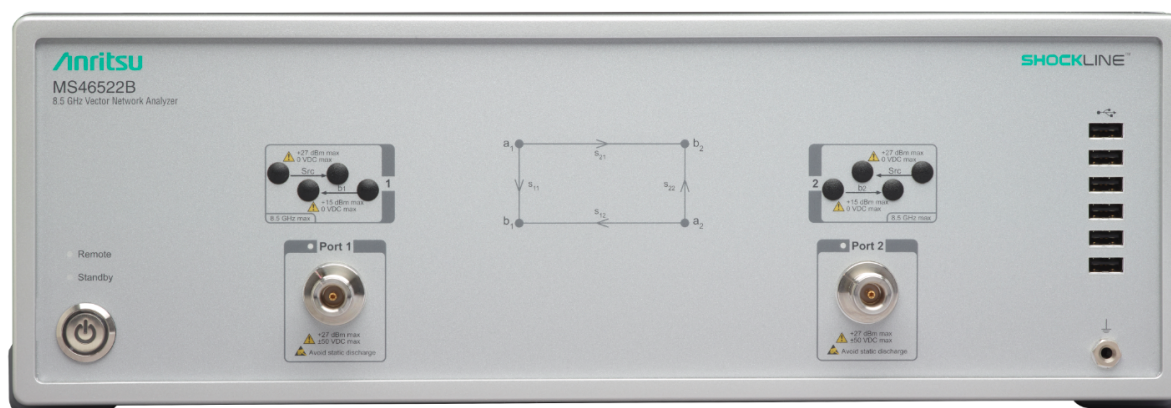

MS46522B ShockLine Performance VNA (8.5 GHz model shown)

Table of Contents

Definitions	3
System Dynamic Range	4
Receiver Compression Levels	4
High Level Noise	4
Output Power Range	4
Output Default Power	4
Power Accuracy	4
Setting Resolution	4
Frequency Resolution, Accuracy, and Stability	5
Source Harmonics and Non-Harmonics (Spurious)	5
Uncorrected (Raw) Port Characteristics	5
VNA System Performance for MS46522B-010 Frequency Options	6
VNA System Performance for MS46522B-020 Frequency Options	7
VNA System Performance for MS46522B-040 Frequency Options	8
MS46522B-010 VNA System Performance with 8.5 GHz MN25208A SmartCal™	9
MS46522B-040 VNA System Performance with 40 GHz 36585K Precision AutoCal	10
MS46522B-082 E-Band Option VNA System Performance	11
Measurement Throughput Summary	12
Standard Capabilities	12
Calibration and Correction Capabilities	14
Optional Capabilities	14
Remote Operability	14
Front Panel Connections	15
Rear Panel Connections	15
CPU, Memory, and Security Features	16
Mechanical	16
Environmental	16
Electromagnetic Compatibility	16
Safety	16
Warranty	16
Ordering Information	17

Definitions

Warm-Up Time	All specifications and characteristics apply under the following conditions, unless otherwise stated: After 45 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Over the 25 °C ± 5 °C temperature range.
Frequency Range	The instrument operates in the following frequency ranges without any implied or warranted specifications: 50 kHz to 300 kHz, 40 GHz to 43.5 GHz, 55 GHz to 60 GHz, and from 90 GHz to 92 GHz.
Error-Corrected Specifications	For error-corrected specifications, over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature. For error-corrected specifications are warranted and include guard-bands, unless otherwise stated.
Simultaneous Sweep Mode	Specifications are not warranted in simultaneous sweep mode (only applicable to the 8.5 GHz model).
Frequency Bands in Tables	When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band.
User Cables	Specifications do not include effects of any user cables attached to the instrument.
Discrete Spurious Responses	Specifications may exclude discrete spurious responses.
Internal Reference Signal	All specifications apply with internal 10 MHz Crystal Oscillator Reference Signal.
Interpolation Mode	All specifications are with Interpolation Mode Off.
Standard	Refers to instruments with mandatory frequency option only.
Typical Performance	Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty. Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical.
Characteristic Performance	Characteristic performance indicates a performance designed-in and verified during the design phase. It does include guard-bands and is not covered by the product warranty.
Recommended Calibration Cycle	12 months (Residual specifications also require calibration kit calibration cycle adherence.)
Specifications Subject to Change	All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com

System Dynamic Range¹

System dynamic range is calculated as the difference between the test port maximum source power and the RMS noise floor at 10 Hz IF Bandwidth with averaging off and smoothing on after calibrating the instrument for transmission frequency response and isolation.

Frequency Range	Standard (dB)	Typical (dB)
300 kHz to 1 MHz	90	101
> 1 MHz to 50 MHz	100	108
> 50 MHz to 2 GHz	140	144
> 2 GHz to 4 GHz	137	142
> 4 GHz to 6 GHz	130	137
> 6 GHz to 8 GHz ^a	128	130
> 8 GHz to 8.5 GHz	120	127 ^a
> 8.5 GHz to 25 GHz	117	122
> 25 GHz to 40 GHz	120	127
> 40 GHz to 43.5 GHz	–	120

a. Dynamic range degrades by 4 dB for Options 20 and 40.

Receiver Compression Levels

Port power level beyond which the response may be compressed more than 0.1 dB relative to the normalization level. Measured at 300 Hz IF bandwidth. Match not included. Performance is typical.

Frequency Range	Level (dBm)
300 kHz to 40 GHz	+15

High Level Noise²

Measured at 100 Hz IF bandwidth and at default power level, RMS.

Frequency	Magnitude (dB)	Phase (deg)
300 kHz to 1 GHz	0.004 (0.003, typical)	0.04 (0.02, typical)
> 1 GHz to 25 GHz	0.003 (0.002, typical)	0.05 (0.02, typical)
> 25 GHz to 40 GHz	0.004 (0.002, typical)	0.05 (0.04, typical)
> 40 GHz to 43.5 GHz	(0.002, typical)	(0.05, typical)

Output Power Range

Minimum to maximum rated leveled output power. Performance is characteristic.

Frequency	Standard (dBm)	Typical (dBm)
300 kHz to 6 GHz	–30 to +15	–30 to +17
> 6 GHz to 8 GHz	–30 to +12	–30 to +13
> 8 GHz to 8.5 GHz	–30 to +10	–30 to +11
> 8.5 GHz to 40 GHz	–30 to +7	–30 to +10
> 40 GHz to 43.5 GHz	–	–30 to +4

Output Default Power

Instrument default power is +5 dBm. For maximum rated power, refer to Output Power Range above. Not applicable to MS46522B-082.

Power Accuracy

Performance is characteristic. Not applicable to MS46522B-082.

Output Power	Standard (dB)	Typical (dB)
At +5 dBm	± 1.0 ^a	± 0.7
At 0 dBm	± 1.5 ^b	± 0.5
At –30 dBm	± 3.0	± 1.8

a. Power accuracy degrades by 0.5 dB (>8.5 GHz to 25 GHz), and by 1 dB (>25 GHz to 40 GHz).

b. Power accuracy degrades by 0.5 dB (>8.5 GHz).

Setting Resolution

Output Power	Setting Resolution (dB)
300 kHz to 43.5 GHz	0.01

1. System dynamic range is degraded by 20 dB from the standard specifications in simultaneous sweep mode. Performance is typical.

2. High level noise specification in simultaneous sweep mode: Magnitude 0.005 dB (typical), Phase 0.05 degree (typical).

Frequency Resolution, Accuracy, and Stability

All specifications typical. Not applicable to MS46522B-082.

Resolution	Accuracy	Stability/Temperature	Stability
1 Hz	± 0.1 (at time of calibration)	± 0.1 ppm/10 °C to 50 °C	± 0.02 ppm/24 hours ± 0.2 ppm/1 month ± 1.0 ppm/1 year ± 2.0 ppm/3 years

Source Harmonics and Non-Harmonics (Spurious)

Measured at 0 dBm. All specifications typical.

Frequency	Harmonics (second and third) (dBc)	Non-Harmonic Spurious (dBc)	Phase Noise @ 10 kHz Offset (dBc/Hz)
300 kHz to 8.5 GHz	< -30	< -30	> 60

Uncorrected (Raw) Port Characteristics

User correction off. System correction on. All specifications typical.

Frequency Range	Directivity (dB)	Port Match (dB) ^a
300 kHz to 1 GHz	> 21	> 17
> 1 GHz to 4 GHz	> 21	> 17
> 4 GHz to 8.5 GHz	> 15	> 15
> 8.5 GHz to 40 GHz	> 15	> 15

a. Port Match is defined as the worst of source and load match.

VNA System Performance for MS46522B-010 Frequency Options

Error-Corrected Specifications


With 12-term SOLT Calibration using the TOSLN50A-18 N Type Connector Calibration Kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
300 kHz to 50 MHz	> 40	> 35	> 38	±0.15	±0.09
> 50 MHz to 6 GHz	> 40	> 35	> 38	±0.08	±0.05
> 6 GHz to 8 GHz	> 36	> 35	> 34	±0.08	±0.05
> 8 GHz to 8.5 GHz	> 36	> 35	> 34	±0.10	±0.08

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

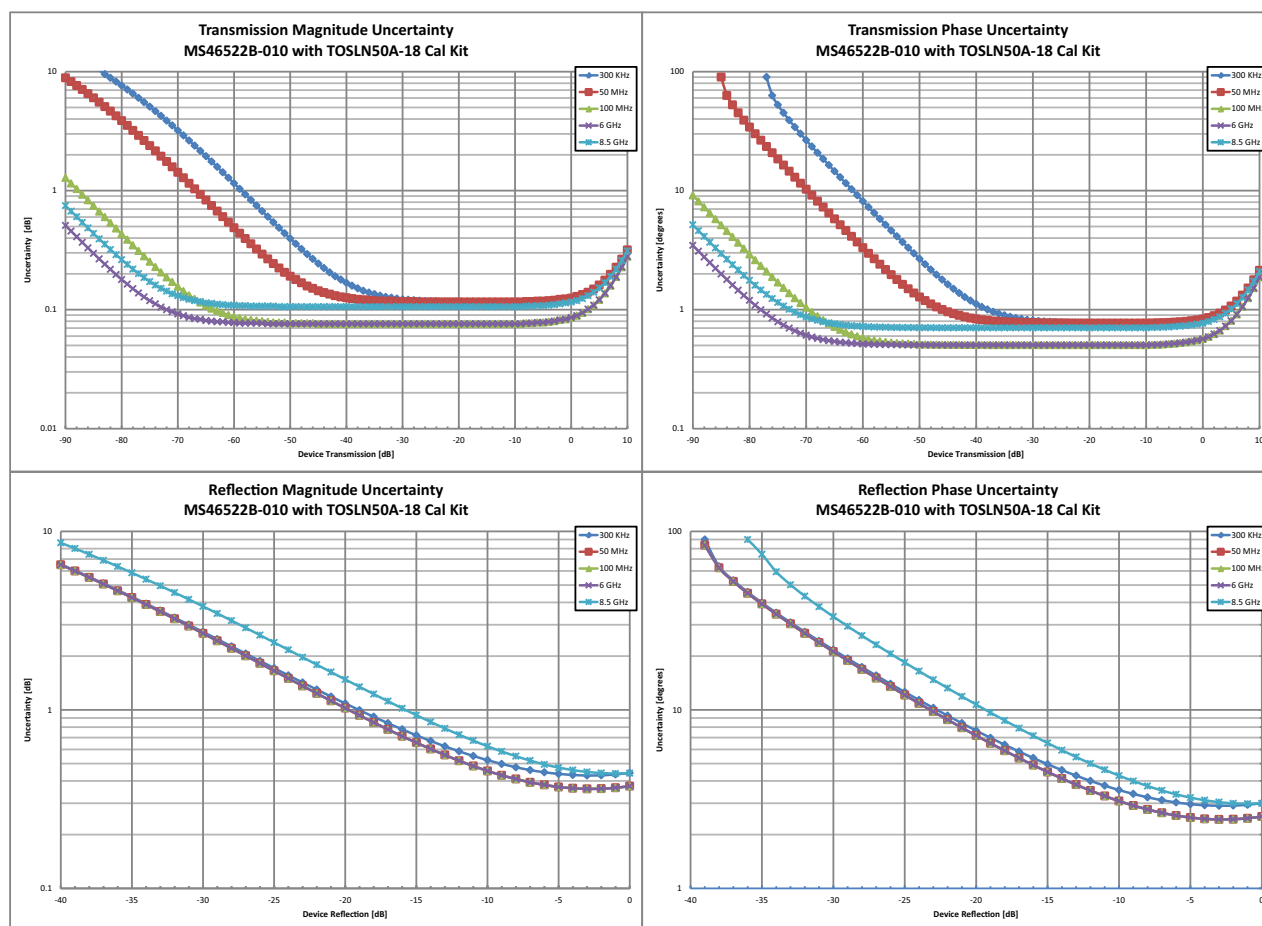

VNA System Performance for MS46522B-020 Frequency Options

Error-Corrected Specifications


With 12-term SOLT Calibration using the TOSLK50A-40 K Type Connector Calibration Kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
300 kHz to 50 MHz	> 42	> 35	> 42	±0.10	±0.09
50 MHz to 10 GHz	≥ 42	≥ 35	≥ 42	±0.10	±0.05
> 10 GHz to 20 GHz	≥ 36	≥ 26.5	≥ 36	±0.10	±0.05

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

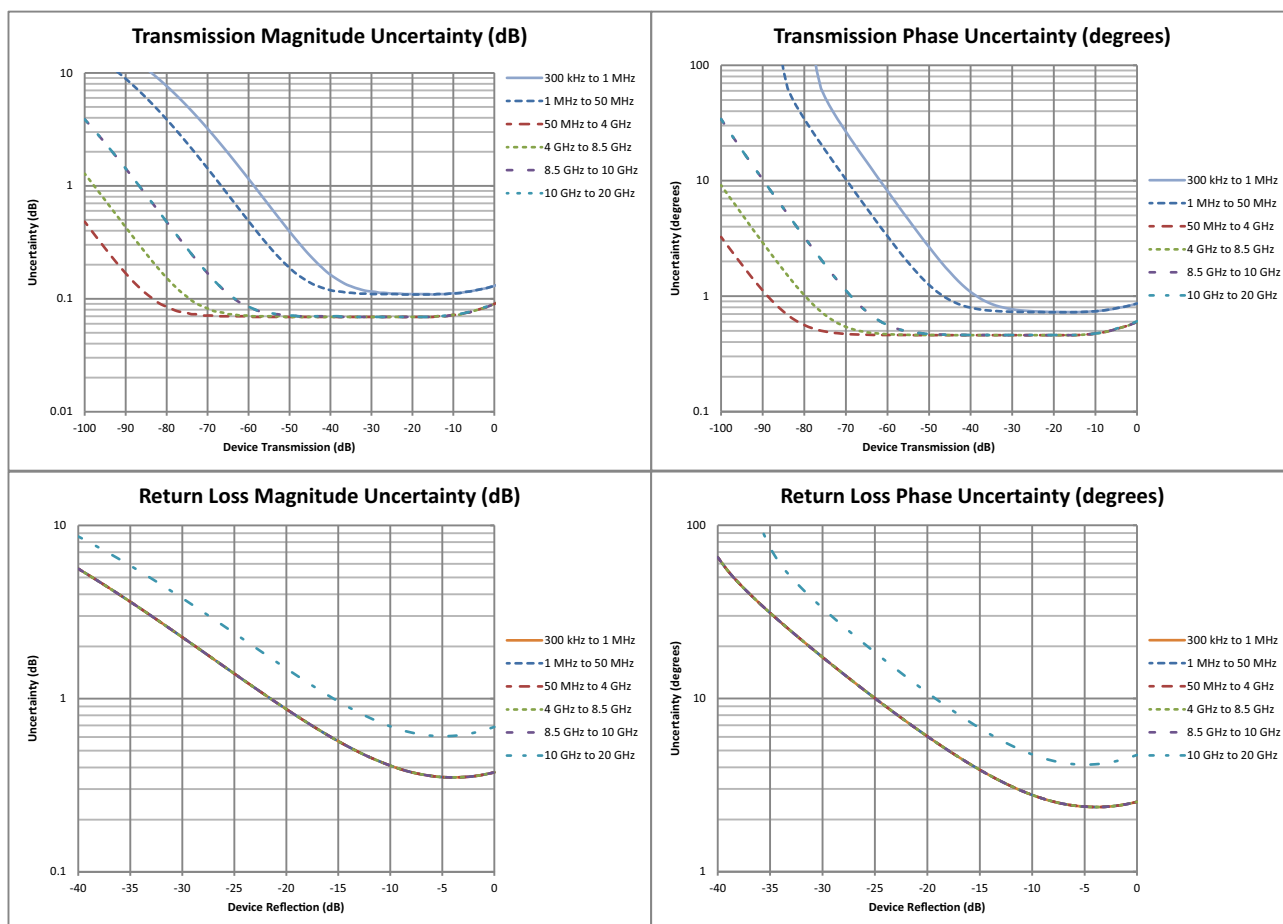

VNA System Performance for MS46522B-040 Frequency Options

Error-Corrected Specifications


With 12-term SOLT Calibration using the TOSLK50A-40 K Type Connector Calibration Kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
300 kHz to 50 MHz	> 42	> 35	> 42	±0.10	±0.09
50 MHz to 10 GHz	≥ 42	≥ 35	≥ 42	±0.10	±0.05
> 10 GHz to 20 GHz	≥ 36	≥ 26.5	≥ 36	±0.10	±0.05
> 20 GHz to 30 GHz	≥ 32	≥ 22.5	≥ 32	±0.10	±0.05
> 30 GHz to 43.5 GHz	≥ 30	≥ 20	≥ 30	±0.10	±0.05

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

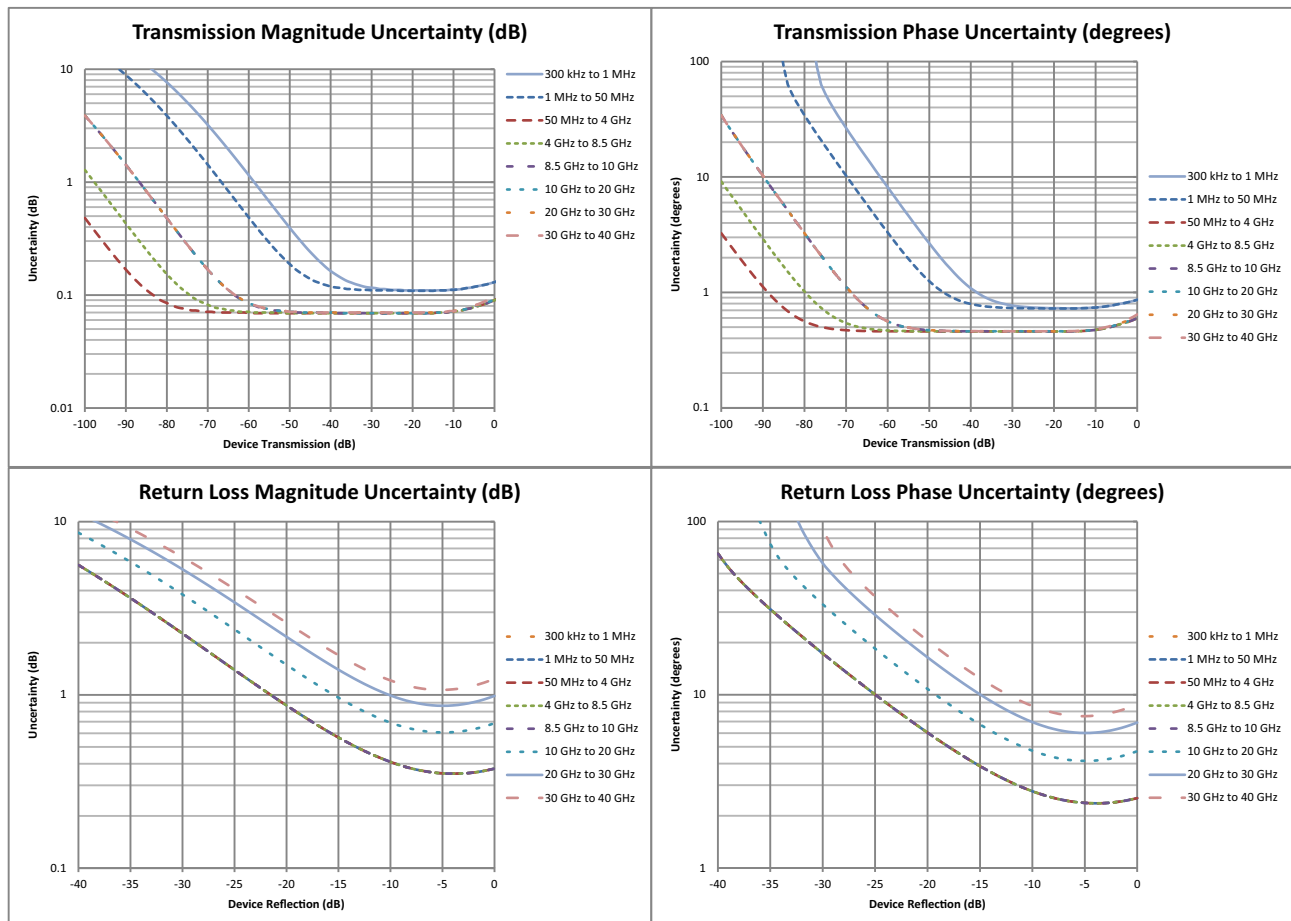

MS46522B-010 VNA System Performance with 8.5 GHz MN25208A SmartCal™

Error-Corrected Specifications

With 12-term calibration using the MN25208A SmartCal™ automatic calibration kit with connector options MN25208A-001, -002, -003, and -004.^a


Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^b (dB)	Reflection Tracking ^b (dB)	Transmission Tracking ^b (dB)
300 kHz to 50 MHz	> 42	> 35	> 38	±0.15	±0.08
> 50 MHz to 5 GHz	> 42	> 35	> 38	±0.08	±0.08
> 5 GHz to 8 GHz	> 36	> 35	> 33	±0.08	±0.08
> 8 GHz to 8.5 GHz	> 36	> 35	> 33	±0.10	±0.08

a. Specifications are not warranted with MN25208A-004. All specifications are typical.

b. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

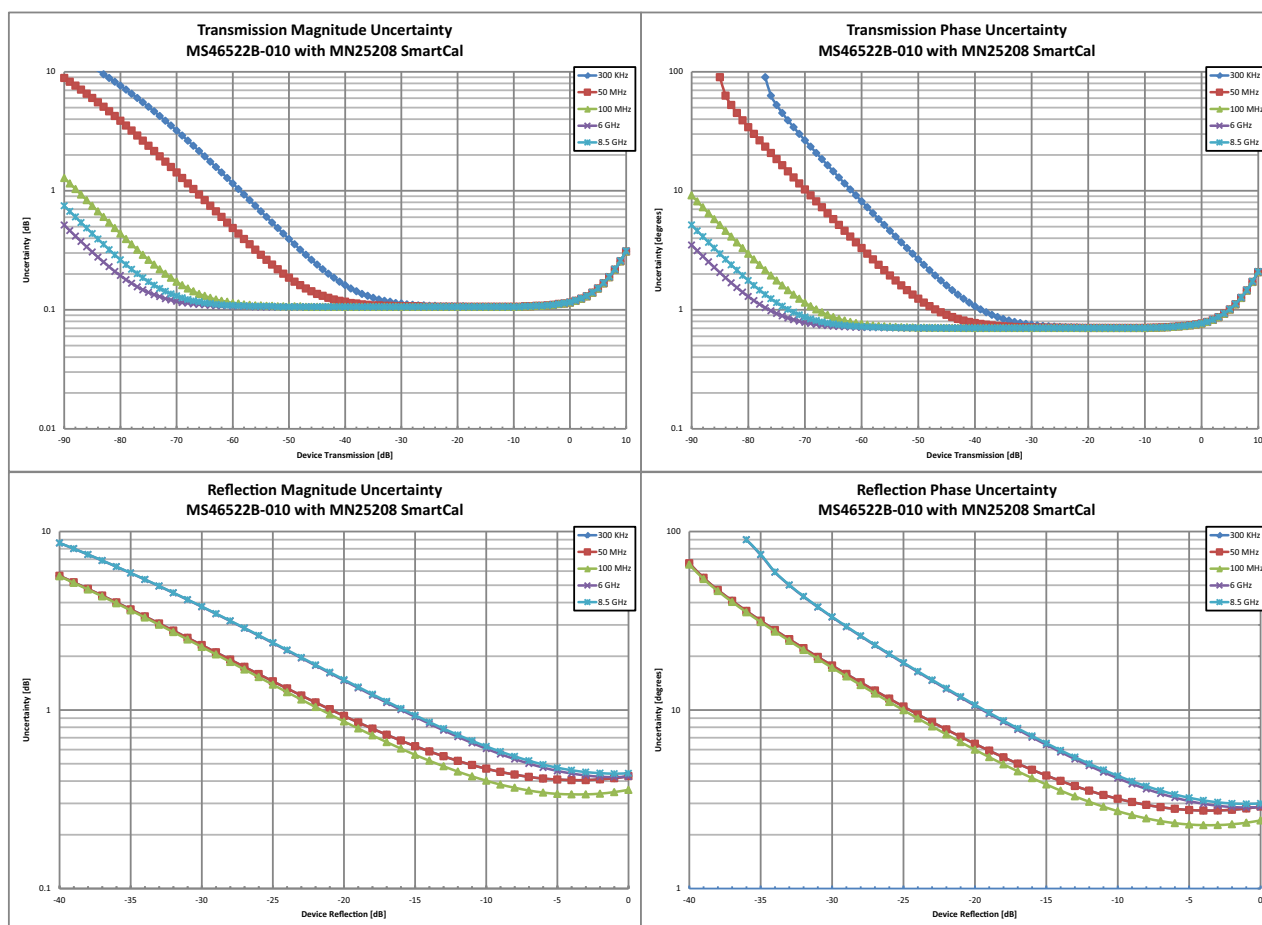

MS46522B-040 VNA System Performance with 40 GHz 36585K Precision AutoCal

Error-Corrected Specifications


With 12-term calibration using the 36585K series automatic calibration kit with type K connectors

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
300 kHz to < 10 MHz	≥ 40	≥ 40	≥ 40	±0.10	±0.20
10 MHz to < 2.5 GHz	≥ 43	≥ 47	≥ 43	±0.20	±0.20
2.5 GHz to < 4 GHz	≥ 50	≥ 47	≥ 50	±0.20	±0.20
4 GHz to < 8 GHz	≥ 50	≥ 47	≥ 50	±0.30	±0.20
8 GHz to < 11 GHz	≥ 50	≥ 47	≥ 50	±0.40	±0.20
11 GHz to < 20 GHz	≥ 50	≥ 47	≥ 50	±0.30	±0.20
20 GHz to < 40 GHz	≥ 48	≥ 47	≥ 48	±0.40	±0.20

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

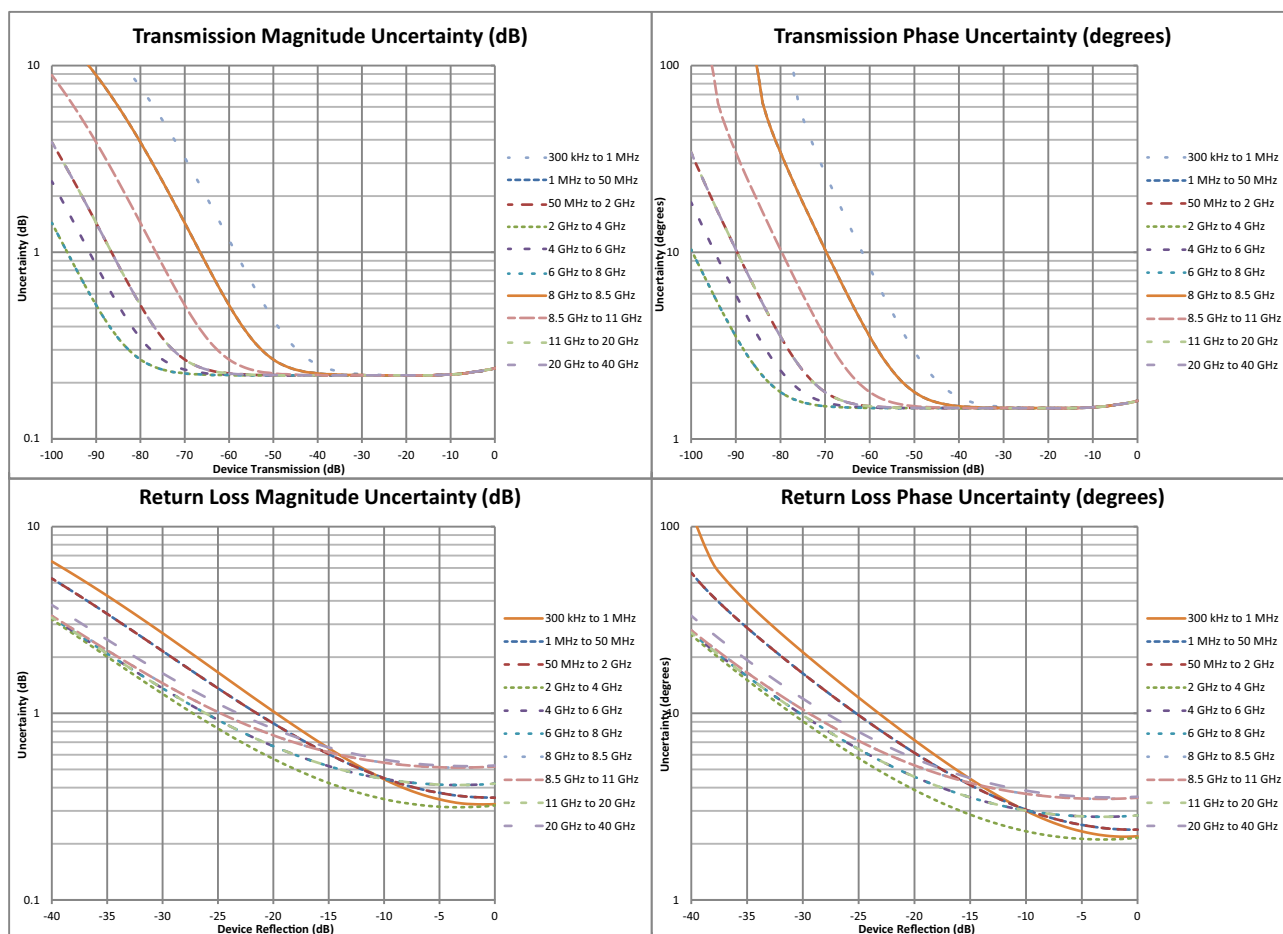


MS46522B-082 E-Band Option VNA System Performance

Introduction

The E-band option (Option 82) consists of the MS46500B Series VNA base chassis and small source/receiver modules. The modules are attached to the chassis through one meter flexible tethers that are permanently attached to the unit.

Band	Frequency Range	Waveguide Flange
Extended E-Band	55 GHz to 92 GHz	WR-12

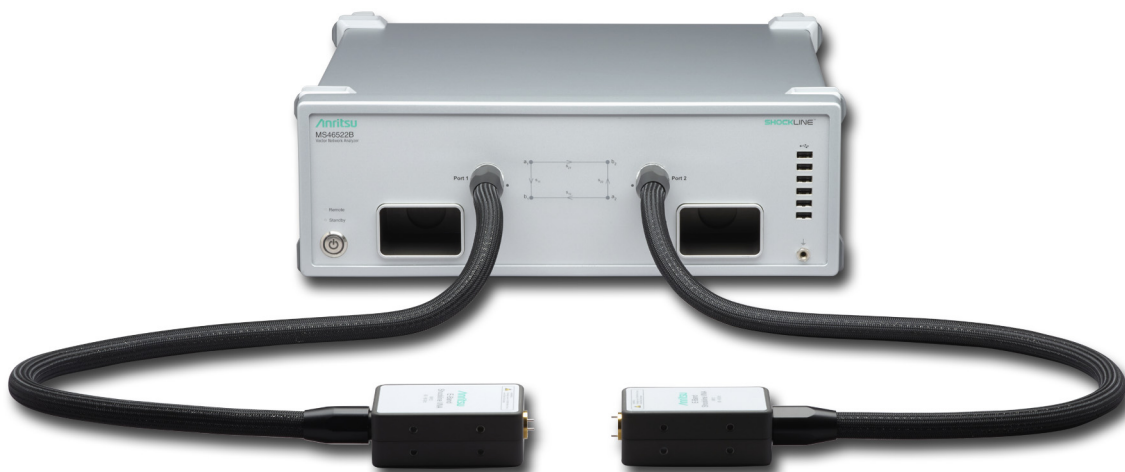

MS46522B E-Band VNA

System Dynamic Range

System dynamic range is calculated as the difference between the test port maximum source power and the RMS noise floor at 10 Hz IF Bandwidth with averaging off and smoothing on after calibrating the instrument for transmission frequency response and isolation.

Frequency	Typical (dB)
60 GHz to 90 GHz	120

High Level Noise

Measured at 100 Hz IF bandwidth and at default power level, RMS. Performance is typical.

Frequency	Magnitude (mdB)
60 GHz to 90 GHz	4

Output Power Range

Minimum to maximum rated leveled output power. Performance is typical

Frequency	Standard (dBm)
60 GHz to < 61 GHz	-50 to -10
61 GHz to < 68.6 GHz	-50 to -6
68.6 GHz to < 85 GHz	-50 to 0
85 GHz to < 88.8 GHz	-50 to -3
88.8 GHz to < 90 GHz	-50 to -10

Power Accuracy

Accuracy is defined at -10 dBm or max rated power, whichever is lower. Performance is typical

Frequency	Accuracy (dB)	Resolution (dB)
60 GHz to 90 GHz	±2.0	0.01

Measurement Throughput Summary

Cycle Time for Measurement Completion (ms)

Number of traces = 1; system error correction on. Typical performance data.

Number of Points	500 kHz IF Bandwidth				100 kHz IF Bandwidth				1 kHz IF Bandwidth			
	51	201	401	1601	51	201	401	1601	51	201	401	1601
Start 1 GHz, stop 1.2 GHz												
Uncorrected	2	6	11	41	2	6	11	41	54	211	421	1677
2-Port Cal, S21	8	19	35	129	8	21	39	151	113	433	860	3422
Start 300 kHz, stop 4.5 GHz												
Uncorrected	3	7	12	43	3	7	12	43	55	213	422	1680
2-Port Cal, S21	9	20	37	135	10	23	41	154	115	434	865	3421
Start 300 kHz, stop 8.5 GHz												
Uncorrected	4	7	12	43	4	8	13	43	56	213	423	1680
2-Port Cal, S21	9	21	36	129	10	23	42	153	119	435	861	3424

Data Transfer Time (ms)

Transferred complex S11 data, using "CALC:DATA:SDATA?" command. Typical performance data.^a

Number of Points	51	201	401	1601
SCPI over LAN				
REAL 64	4	4	4	8
REAL 32	4	4	4	8
ASCII	14	34	60	209

a. Data transfer time varies depending on the PC and control software used with the VNA.

Standard Capabilities

Operating Frequencies

MS46522B-010	50 kHz to 8.5 GHz
MS46522B-020	50 kHz to 20 GHz
MS46522B-040	50 kHz to 43.5 GHz
MS46522B-082	55 GHz to 92 GHz

Measurement Parameters

2-Port Measurements	S_{11} , S_{21} , S_{22} , S_{12} , and any user-defined combination of a_1 , a_2 , b_1 , b_2 , 1 Maximum Efficiency Analysis
Domains	Frequency Domain, and Time (Distance) Domain

Sweeps

Sweep Configurations	Standard or Simultaneous (MS46522B-010 option only)
Frequency Sweep Types	Linear, Log, or Segmented
Power Sweep Types	Linear

Display Graphs

Single Rectilinear Graph Types	Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, and Impedance
Dual Rectilinear Graph Types	Log Mag and Phase, Linear Mag and Phase, Real and Imaginary
Circular Graph Types	Smith Chart (Impedance), Polar

Measurements Data Points

Maximum Data Points	2 to 20,001 points
---------------------	--------------------

Limit Lines

Limit Lines	Single or segmented. 2 limit lines per trace. 50 segments per trace.
Single Limit Readouts	Uses interpolation to determine the intersection frequency.
Test Limits	Both single and segmented limits can be used for PASS/FAIL testing.

Averaging

Point-by-Point	Point-by-point (default), maximum number of averages = 4096
Sweep-by-Sweep	Sweep-by-sweep, maximum number of averages = 4096

IF Bandwidth

10, 20, 30, 50, 70, 100, 200, 300, 500, 700 Hz
1, 2, 3, 5, 7, 10, 20, 30, 70, 100, 200, 300, 500 kHz

Reference Plane		
Line Length or Time Delay		The reference planes of a calibration or other normalization can be changed by entering a line length or time delay.
Dielectric Constants		Dielectric constants may be entered for different media so the length entry can be physically meaningful.
Dispersion Modeling		Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities.
Attenuations		Attenuations and constant phase offsets can be entered to better describe any reference plane distortions.
De-embedding		For more complete reference plane manipulation, the full de-embedding system can also be used.
Measurement Frequency Range		
Frequency Range Change		Frequency range of the measurement can be narrowed within the calibration range without recalibration.
CW Mode		CW mode permits single frequency measurements also without recalibration.
Interpolation Not Activated		If interpolation is not activated, the subset frequency range is forced to use calibration frequency points.
Interpolation Activated		If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error.
Group Delay		
Group Delay Aperture		Defined as the frequency span over which the phase change is computed at a given frequency point.
Aperture		The aperture can be changed without recalibration.
Minimum Aperture		The minimum aperture is the frequency range divided by the number of points in calibration and can be increased to 20 % of the frequency range.
Group Delay Range		< 180° of phase change within the aperture
Channels, Display, and Traces		
Channels and Traces		16 channels, each with up to 16 traces
Display Colors		Unlimited colors for data traces, memory, text, markers, graticules, and limit lines
Trace Memory and Math		A separate memory for each trace can be used to store measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled.
Intra-trace Math		Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace.
Scale Resolution		Minimum per division, varies with graph type.
Log Magnitude		0.001 dB
Linear Magnitude		10 μ U
Phase		0.01°
Group Delay		0.1 ps
Time		0.0001 ps
Distance		0.1 μ m
SWR		10 μ U
Power		0.01 dB
Markers		
Markers		12 markers + 1 reference marker per trace
Marker Coupling		Coupled or decoupled
Marker Data		Data displayed in graph area or in table form
Reference Marker		Additional marker per trace for reference
Marker Statistics		Mean, maximum, minimum, standard deviation
		Per trace or over a marker region
Marker Search and Tracking		Search and/or track for minimum, maximum, peak, or target value
Other		
Filter Parameters		Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors.

Calibration and Correction Capabilities

Calibration Methods	Short-Open-Load-Through (SOLT) Short-Open-Load-Reciprocal (SOLR) Offset-Short-Offset-Short-Load-Through (SSLT) Triple-Offset-Short-Through (SSST) Line-Reflect-Line (LRL) / Line-Reflect-Match (LRM) SmartCal AutoCal Thru Update available
Correction Models	2-Port (Forward, Reverse, or both directions) 1-Port (S_{11} , S_{22} , or both) Transmission Frequency Response (Forward, Reverse, or both directions) Reflection Frequency Response (S_{11} , S_{22} , or both)
Coefficients for Calibration Standards	Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files. Use predefined coefficients for Anritsu calibration kits in ShockLine software. Enter coefficients into user-defined locations. Use complex load models.
Interpolation	Allows interpolation between calibration frequency points.
Adapter Removal Calibration	Characterizes and “removes” an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices.
Dispersion Compensation	Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip
Embedding/De-embedding	The MS46522B is equipped with an Embedding/De-embedding system.
De-embedding	De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements.
Embedding	Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement.
Multiple Networks	Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily.
Extraction Utility	An extraction utility is part of this package that allows easier computation of de-embedding files based on additional calibration steps and measurements.
Impedance Conversion	Allows entry of different reference impedances (complex values) for different ports

Optional Capabilities

Time Domain Measurements
Option 002


Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate.

Remote Operability

ShockLine supports several remote operability options.

Communication Type	Data Format	Performance	Description
Via LAN	Using VXI-11 Protocol	Gigabit Data Transfer Speed	Use SCPI commands
Drivers for LAN	IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python34 programming environments.		
Triggering	Start Trigger	Software and digital edge	
	Input Range	+3.3 V logic level (+5 V tolerant)	
	Minimum Trigger Width	50 ns	
	Trigger Delay	6 μ s, typical	

Front Panel Connections

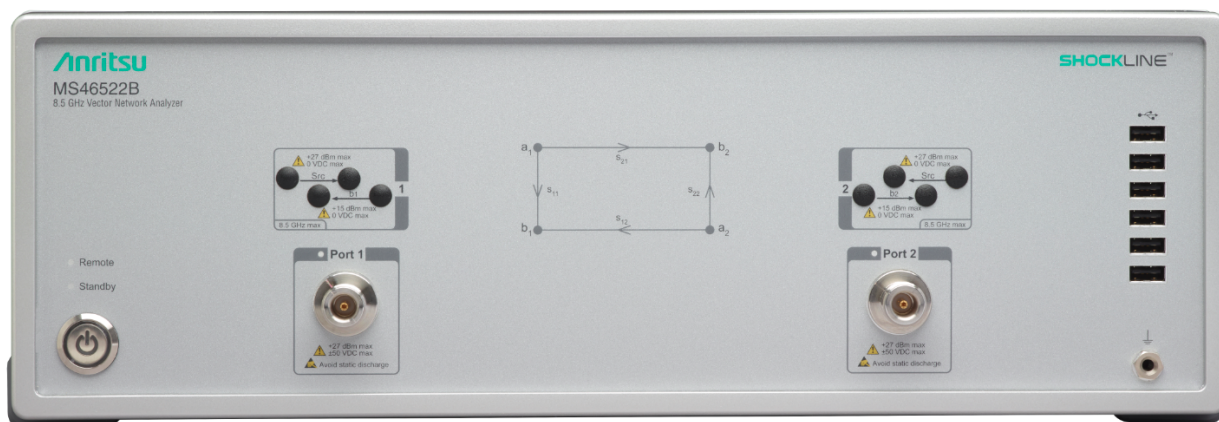

MS46522B Front Panel (8.5 GHz model shown)

Test Ports 1 and 2

MS46522B-010	N(f)
MS46522B-020	K(m)
MS46522B-040	K(m)
MS46522B-082	WR12 Waveguide Flange
Damage Input Levels	+27 dBm maximum, 50 VDC maximum

USB Ports

Six type A USB 2.0 Ports for peripherals such as keyboard, mouse, memory stick, hardware key, and similar devices.

Chassis Grounding Port

Banana(f)

Rear Panel Connections



MS46522B Rear Panel

AC Power Input

AC Input connector, with On/Off switch, and fuses 350 VA maximum, 90 to 264 VAC, 47 to 63 Hz (power factor controlled)

USB and LAN

USB Ports	Two type A USB 2.0 Ports and two type A USB 3.0 for peripherals such as keyboard, mouse, memory stick, USB monitor, and hardware key.
LAN Port	Gigabit Ethernet

HDMI Port

Video output, touchscreen compatible

10 MHz In

Connector Type	BNC(f)
Signal	+0 dBm, typical; 50 Ω , nominal

10 MHz Out

Connector Type	BNC(f)
Signal	+8 dBm, typical; 50 Ω , nominal

External Trigger Input

Connector Type	BNC(f)
Voltage Input	0 to 3.3 V input (5 V tolerant)
Impedance	High impedance (> 100 kΩ)
Pulse Width	50 ns minimum input pulse width
Trigger Delay	6 μs typical

External Trigger Output

Connector type	BNC(f)
Voltage Output	0 to 3.3 V (HCMOS logic)
Drive Current	24 mA maximum
Pulse Width	1 μs, typical

CPU, Memory, and Security Features

CPU	Intel Core™ i5
Storage	Serial-ATA (SATA) Solid State Drive (SSD, removable), for OS, Programs, and Data. (> 30 GB)

Security Features

Virus Protection, Best Practices	If the VNA is attached to a network, best practices recommend installing anti-virus software.
----------------------------------	---

Mechanical**Dimensions**

H x W x D	Dimensions listed are for the instrument body only, without rack mount option attached. 152 mm x 445 mm x 442 mm
-----------	---

Weight

< 11 kg (< 25 lb), typical weight for a fully-loaded MS46522B-010 VNA
< 13 kg (< 28 lb), typical weight for a fully-loaded MS46522B-20 or MS46522B-040 VNA

Environmental**Operating**

Temperature Range	Specification Conforms to MIL-PRF-28800F (class 4) 0 °C to +45 °C
Relative Humidity	5 % to 95 % at +40 °C, Non-condensing

Non-Operating

Temperature Range	–40 °C to +75 °C
Relative Humidity	0 % to 90 % at +65 °C, Non-condensing

Electromagnetic Compatibility

EMI Conforms to and meets the requirements of:

EMC Directive	2004/108/EC
Low Voltage Directive	2006/95/EC
Emissions	EN55011:2009+A1:2010 Group 1 Class A
Immunity	EN 61000-4-2:2009, 4 kV CD, 8 kV AD EN 61000-4-3:2006+A2:2010, 3 V/m EN 61000-4-4:2004, 0.5 kV S-L, 1 kV P-L EN 61000-4-5:2006, 0.5 kV S-L, 1 kV L-E EN 61000-4-6:2009, 3 V EN 61000-4-11:2004, 100% @ 20 ms

Safety

European Union	CE Mark
Standard:	EN 61010-1:2010

Warranty

Instrument and Built-In Options	3 years from the date of shipment (standard warranty)
Calibration Kits	Typically 1 year from the date of shipment
Test Port Cables	Typically 1 year from the date of shipment
Warranty Options	Additional warranty available

Ordering Information

Instrument Models		
MS46522B	ShockLine 2-Port Vector Network Analyzer (base model)	
Requires One Frequency Option		
MS46522B-010	50 kHz to 8.5 GHz, type N(f) ports	
MS46522B-020	50 kHz to 20 GHz, type K(m) Ruggedized ports (compatible with 3.5 mm and SMA connectors)	
MS46522B-040	50 kHz to 43.5 GHz, type K(m) Ruggedized ports (compatible with 3.5 mm and SMA connectors)	
MS46522B-082	55 GHz to 92 GHz, WR12 waveguide flange	
Included Accessories		
	Each VNA comes with a set of included accessories.	
User Documentation	The user documentation USB flash drive includes Adobe Acrobat PDF files for the ShockLine Operation Manual, User Interface Reference Manual, Programming Manual, and the Technical Data Sheet.	
Power	Power Cord	
Main VNA Options		
MS46522B-001	Rack Mount, adds handles and removes feet for shelf-mounting into a 19 inch universal rack	
MS46522B-002	Time Domain with Time Gating	
Calibration Options (not available for the MS46522B-082)		
MS46522B-098	Standard Calibration, ISO 17025 compliant, without data	
MS46522B-099	Premium Calibration, ISO 17025 compliant, with data	
Precision Automatic Calibrator Modules		
MN25208A	2-port USB SmartCal Module, 300 kHz to 8.5 GHz, (available with various connector options)	
36585K-2M	K Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(m)	
36585K-2F	K Precision AutoCal Module, 70 kHz to 40 GHz, K(f) to K(f)	
36585K-2MF	K Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(f)	
Mechanical Calibration Kits		
3650	SMA/3.5 mm Calibration Kit	
3653A	N Calibration Kit, Without Sliding Loads	
3655E	WR-12 Waveguide Calibration Kit, Without Sliding Loads	
3655E-1	WR-12 Waveguide Calibration Kit, With Sliding Loads	
OSLN50A-8	Precision N Male Open/Short/Load Mechanical Calibration Tee	
OSLNF50A-8	Precision N Female Open/Short/Load Mechanical Calibration Tee	
TOSLN50A-8	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee	
TOSLNF50A-8	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee	
OSLN50A-18	Precision N Male Open/Short/Load Mechanical Calibration Tee	
OSLNF50A-18	Precision N Female Open/Short/Load Mechanical Calibration Tee	
TOSLN50A-18	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee	
TOSLNF50A-18	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee	
TOSLK50A-20	Precision K Male Through/Open/Short/Load Mechanical Calibration Tee	
TOSLKF50A-20	Precision K Female Through/Open/Short/Load Mechanical Calibration Tee	
TOSLK50A-40	Precision K Male Through/Open/Short/Load Mechanical Calibration Tee	
TOSLKF50A-40	Precision K Female Through/Open/Short/Load Mechanical Calibration Tee	

RF Cables and Adapters

N120-6	RF Cables, Semi-Rigid, N(m) to N(m), 1 each, 0.01 to 18 GHz, 50 Ω , 15 cm (5.9 in)
NS120MF-6	RF Cables, Semi-Rigid, N(f) to N(f), 1 each, 0.01 to 18 GHz, 50 Ω , 15 cm (5.9 in)
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFN50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω
34NK50	Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω
34NKF50	Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω
34NFK50	Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω
34NFKF50	Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω
K220B	Precision Adapter, K(m) to K(m), DC to 40 GHz, 50 Ω
K222B	Precision Adapter, K(f) to K(f), DC to 40 GHz, 50 Ω
K224B	Precision Adapter, K(m) to K(f), DC to 40 GHz, 50 Ω

Test Port Cables, Flexible, Ruggedized, Phase Stable

14RKFKF50-0.6	0.6 m (24"), DC to 40 GHz, Ruggedized K(f) to K(f), 50 Ω
14RKFKF50-1.0	1.0 m (39"), DC to 40 GHz, Ruggedized K(f) to K(f), 50 Ω
14RKFK50-0.6	0.6 m (24"), DC to 40 GHz, Ruggedized K(f) to K(m), 50 Ω
14RKFK50-1.0	1.0 m (39"), DC to 40 GHz, Ruggedized K(f) to K(m), 50 Ω
14KFKF50-0.6	0.6 m (24"), DC to 40 GHz, K(f) to K(f), 50 Ω
14KFKF50-1.0	1.0 m (39"), DC to 40 GHz, K(f) to K(f), 50 Ω
14KFK50-0.6	0.6 m (24"), DC to 40 GHz, K(f) to K(m), 50 Ω
14KFK50-1.0	1.0 m (39"), DC to 40 GHz, K(f) to K(m), 50 Ω
15NNF50-1.0B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.0 m
15NNF50-1.5B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.5 m
15NN50-1.0B	Test Port Cable, Flexible, Phase Stable, N(m) to N(m), 1.0 m
15LL50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(m), 1.0 m, 50 Ω
15LLF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m, 50 Ω
15KK50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(m), 1.0 m, 50 Ω
15KKF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m, 50 Ω

Phase-Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)

3670K50-1	0.3 m (12"), DC to 40 GHz, K(f) to K(m), 50 Ω
3670K50-2	0.6 m (24"), DC to 40 GHz, K(f) to K(m), 50 Ω
3670N50-1	0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-1	0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 Ω
3670N50-2	0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-2	0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 Ω

Tools

01-200	Calibrated Torque End Wrench, GPC-7 and Type N
01-201	Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in), For tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors
01-204	End Wrench, 5/16 in, Universal, Circular, Open-ended, For SMA, 3.5 mm, 2.4 mm, K and V connectors

Documentation

User Documentation	Soft copies of the manuals as Adobe Acrobat PDF files are included on the User Documentation USB flash drive provided with the instrument. The Maintenance Manual is available from Anritsu Customer Service. For more information, please contact ShockLineVNA.support@Anritsu.com .
10410-00743	MS46522B/524B VNA Operation Manual (OM)
10410-00332	MS46522B/524B VNA User Interface Reference Manual (UIRM)
10410-00746	MS46522B/524B VNA Programming Manual (PM), for IEEE 488.2 and SCPI Commands

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Company

1155 East Collins Blvd, Suite 100
Richardson, TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 Bela Vista, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green
Luton, Bedfordshire LU1 3LU
United Kingdom
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec
Bâtiment Iris 1-Silic 612
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129
00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Kistagångan 20B
164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kay Fiskers Plads 9
2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.

Representation Office in Spain
Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 8
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office
P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shiro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

27th Floor, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower
Concordia Plaza
No. 1 Science Museum Road, Tsim Sha Tsui East
Kowloon, Hong Kong, P. R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi
Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoeyeok-ro, Bundang-gu
Seongnam-si
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road
Notting Hill, Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd, Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20150420

Data subject to change without notice.
For the most recent specifications, visit: www.anritsu.com.