

Anritsu Advancing beyond

Signal Analyzer


MS2840A

MS2840A-040: 9 kHz to 3.6 GHz

MS2840A-041: 9 kHz to 6 GHz

MS2840A-044: 9 kHz to 26.5 GHz

MS2840A-046: 9 kHz to 44.5 GHz

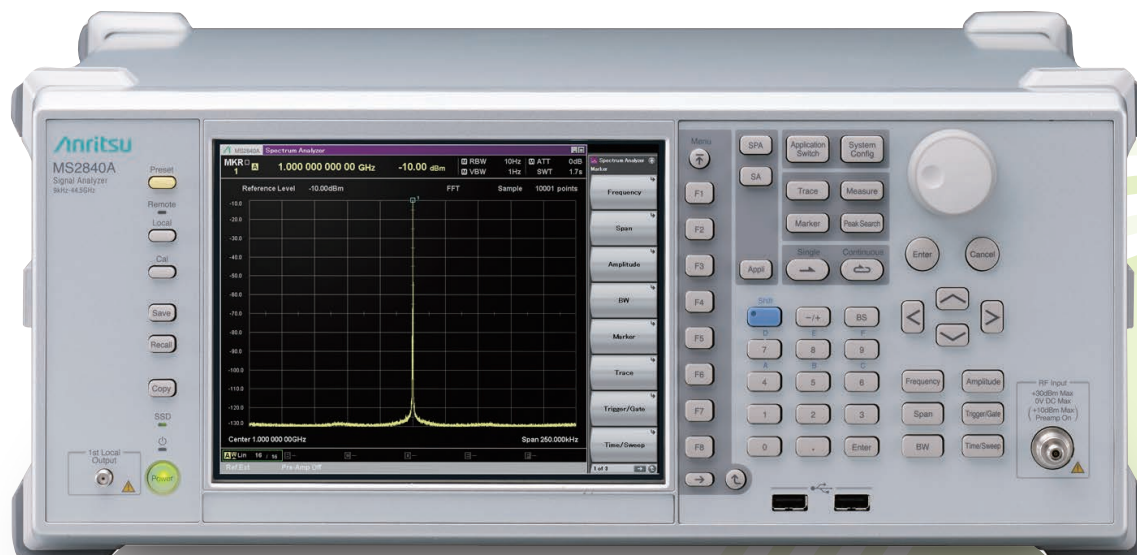

Signal Analyzer MS2840A

This explains how to order the new MS2840A and MS2840A retrofit options and measurement software. Follow the steps below to select the MS2840A configuration. Functions marked "standard" are built-in. Options and measurement software can be added as necessary.

Steps for New Purchase

Step 1. Select Maximum Frequency Range (Required option; Frequency range not upgradeable.)

Outline	Option No.	Additional Information
Frequency range: 9 kHz to 3.6 GHz	MS2840A-040	Spectrum Analyzer/Signal Analyzer (Analysis Bandwidth 31.25 MHz)
Frequency range: 9 kHz to 6 GHz	MS2840A-041	
Frequency range: 9 kHz to 26.5 GHz	MS2840A-044	
Frequency range: 9 kHz to 44.5 GHz	MS2840A-046	

The following options are installed as standard and do not require separate orders when ordering the MS2840A-040/041/044.

Standard Software	MX269000A
Analysis Bandwidth 10 MHz	MS2840A-006
Bandwidth Extension to 31.25 MHz	MS2840A-005

The following options are installed as standard and do not require separate orders when ordering the MS2840A-046.

Standard Software	MX269000A
Analysis Bandwidth 10 MHz	MS2840A-006
Bandwidth Extension to 31.25 MHz for Millimeter-wave	MS2840A-009

Step 2. Choose Frequency Reference

Outline	Option No.	Additional Information
Frequency Reference	Standard	Aging rate: MS2840A-040/041: $\pm 1 \times 10^{-6}$ /year MS2840A-044/046: $\pm 1 \times 10^{-7}$ /year
Rubidium Reference Oscillator	MS2840A-001	Aging rate: $\pm 1 \times 10^{-10}$ /month, $\pm 1 \times 10^{-9}$ /year, Start-up characteristics: $\pm 1 \times 10^{-9}$ (7 minutes after power-on,)
High Stability Reference Oscillator	MS2840A-002	Aging rate: $\pm 1 \times 10^{-7}$ /year *: Dedicated option for MS2840A-040/041 Equivalent function installed as standard in MS2840A-044/046

Step 3. Choose Analysis Bandwidth

Outline	Option No.	Additional Information
Bandwidth Extension to 31.25 MHz	Standard	
Analysis Bandwidth Extension to 62.5 MHz	MS2840A-077	Extends analysis bandwidth to 62.5 MHz *: An image response is received when setting the bandwidth to more than 31.25 MHz. This can be used when not inputting a signal frequency outside the MS2840A analysis bandwidth (62.5 MHz max.). The Signal Analyzer MS2690A is recommended for other measurement purposes.
Analysis Bandwidth Extension to 125 MHz	MS2840A-078	Extends analysis bandwidth to 125 MHz *: Requires MS2840A-077 An image response is received when setting the bandwidth to more than 31.25 MHz. This can be used when not inputting a signal frequency outside the MS2840A analysis bandwidth (125 MHz max.). The Signal Analyzer MS2690A is recommended for other measurement purposes.

Step 4. Add Preamplicifier

Outline	Option No.	Additional Information
Preamplicifier for all frequency options	MS2840A-008	Improves level sensitivity from 100 kHz to 6 GHz. Supports all frequency options. 3.6 GHz upper frequency limit with MS2840A-040.
26.5 GHz Microwave Preamplicifier for MS2840A-044 (26.5 GHz)	MS2840A-069	For MS2840A-044 (26.5 GHz) Increases level sensitivity from 100 kHz to 26.5 GHz *: This is an unselectable option when adding Pulse Radar Measurement Function MX284059A in step 7.
Microwave Preamplicifier for MS2840A-046 (44.5 GHz)	MS2840A-068	For MS2840A-046 (44.5 GHz) Increases level sensitivity from 100 kHz to 44.5 GHz *: This is an unselectable option when adding Pulse Radar Measurement Function MX284059A in step 7.

Signal Analyzer MS2840A

Step 5. Add microwave preselector bypass

Outline	Option No.	Additional Information
Microwave Preselector Bypass	MS2840A-067	<p>Bypassing the preselector used for the microwave band improves RF frequency characteristics and in-band frequency characteristics. Supports signal analyzer measurement functions up to main-frame upper limit frequency.</p> <p>*: Dedicated option for MS2840A-044/046. Add MS2840A-067 when using the signal analyzer measurement functions at bandwidth: >31.25 MHz and frequency: >6 GHz.</p> <p>*: This is an unselectable option when adding Pulse Radar Measurement Function MX284059A in step 7.</p>

Step 6. Improve phase noise performance

Outline	Option No.	Additional Information
Low Phase Noise Performance	MS2840A-066	<p>Greatly improves SSB phase noise performance at offset frequencies from the carrier of 1 kHz to 1 MHz for RF input signals of 3.7 GHz or less</p> <p>*: Dedicated option for MS2840A-040/041</p>

Step 7. Add Measurement Software

Outline	Option No.	Additional Information
Vector Modulation Analysis Software	MX269017A	Supports evaluation of RF Tx characteristics of digital radio equipment and components for wide range of applications such as digital private mobile radio (PMR), wireless backhaul, aerospace and satellite
Analog Measurement Software	MX269018A	For measurement of analog wireless Tx characteristics and output of demodulated audio. Requires USB Audio A0086D. Separate speakers or earphones required to hear demodulated audio.
Pulse Radar Measurement Function	MX284059A	<p>This function measures the transmission characteristics of a pulse radar device. (Tx power, Tx frequency, pulse time, 40 dB bandwidth, spurious, occupied bandwidth)</p> <p>*: Dedicated option for MS2840A-044/046. Adds MS2840A-019 in step 8 when installing on MS2840A-046. This is an unselectable option when installed MS2840A-069, MS2840A-068, MS2840A-067</p>

Step 8. Add Other Signal Analyzer Options

Outline	Option No.	Additional Information
Phase Noise Measurement	MS2840A-010	Adds frequency offset range 10 Hz to 10 MHz phase noise measurement.
Secondary SSD	MS2840A-011	This removable secondary SSD is installed in the secondary HDD/SSD Option Slot of the MS2840A main frame to expand the user data storage space. It does not have the Windows OS installed. The MS2840A ships with it installed. Only one expansion SSD can be installed in the MS2840A.
Precompliance EMI Function	MS2840A-016	This option adds an EMI measurement detection mode and RBW to the spectrum analyzer function. Both the detection mode used for CISPR standards (Quasi-Peak, CISPR-AVG, RMS-AVG) and RBW (200 Hz (6 dB), 9 kHz (6 dB), 120 kHz (6 dB), 1 MHz (Imp)) as well as conventional settings can be selected.
Noise Figure Measurement Function	MS2840A-017	<p>Adds Noise Figure Measurement function.</p> <p>Noise Figure is measured with the measurement method of Y-factor method which uses a Noise Source*.</p> <p>*: Noisecom, NC346 series</p>
2 dB Step Attenuator for Millimeter-wave	MS2840A-019	For MS2840A-046 (44.5 GHz) Expand attenuator steps to 2 dB (Standard: 10 dB steps) and input level for internal mixer can be adjusted with high resolution.
Noise Floor Reduction	MS2840A-051	The Noise Floor Reduction (NFR) function increases the measurement accuracy for low-level signals. It subtracts the internal noise components (11 dB max. nominal) of the measuring instrument itself from the displayed measurement result.
BER Measurement Function	MS2840A-026	<p>Adds BER Measurement Function for input bit rates of 100 bps to 10 Mbps.</p> <p>It supports Rx sensitivity tests by inputting the receiver-demodulated Data/Clock/Enable to the back of the MS2840A.</p> <p>*: The Aux Conversion Adapter J1556A is a standard accessory supplied with MS2840A-026.</p>

Step 9. Add built-in signal generator (Dedicated options for MS2840A-040/041)

Outline	Option No.	Additional Information
3.6 GHz Vector Signal Generator	MS2840A-020	Covers 250 kHz to 3.6 GHz frequency range and adds waveform generator with 120 MHz wide vector modulation bandwidth.
6 GHz Vector Signal Generator	MS2840A-021	Covers 250 kHz to 6 GHz frequency range and adds waveform generator with 120 MHz wide vector modulation bandwidth.
Analog Signal Generator	MS2840A-088	Covers 100 kHz to 3 GHz frequency range. Requires Analog Measurement Software and USB Audio A0086D.

Order the following options at new orders when requiring a vector signal generator and analog signal generator.

3.6 GHz Vector Signal Generator MS2840A-020 or 6 GHz Vector Signal Generator MS2840A-021

Low Power Extension for Vector Signal Generator MS2840A-022

Analog Function Extension for Vector Signal Generator MS2840A-029

Analog Measurement Software MX269018A

USB Audio A0086D

The following options are installed as standard and do not require separate orders when ordering the MS2840A-020/021.

Standard waveform pattern MX269099A

Signal Analyzer MS2840A

Step 9-1. Add options for vector signal generator (Requires MS2840A-020 or MS2840A-021)

Outline	Option No.	Additional Information
Vector Signal Generator Low-power Extension	MS2840A-022	Expands lower limit of output level from -40 to -136 dBm. (Note: 5-dB drop in upper output level.)
Vector Signal Generator ARB Memory Extension 256 Msample	MS2840A-027	Expands ARB memory capacity from 64 to 256 Msamples.
AWGN	MS2840A-028	Adds AWGN generator function.
Analog Function Extension for Vector Signal Generator	MS2840A-029	Adds analog signal generation function using Analog Measurement Software MX269018A to Vector Signal Generator option (MS2840A-020/021). Can calibrate lower limit frequency up to 100 kHz (MS2840A-020/021 lower limit frequency is 250 kHz). Requires MX269018A, MS2840A-020 or 021, MS2840A-022, and A0086D

Step 9-2. Add vector waveform generation tool (IQproducer) license (Requires MS2840A-020 or MS2840A-021)

Outline	Option No.	Additional Information
TDMA IQproducer	MX269902A	Outputs waveform pattern created by setting TDMA parameter with TDMA IQproducer from vector signal generator option.
Multi-carrier IQproducer	MX269904A	Outputs multi-carrier waveform pattern of tone signal and various communication method modulated signals from vector signal generator option.

Step 10. Add Accessories

Outline	Option No.	Additional Information
Inline Peak Power Sensor (350 MHz to 4 GHz)	MA24105A	Supports 350 MHz to 4 GHz and operates on Windows.
USB Power Sensor (50 MHz to 6 GHz)	MA24106A	Supports 50 MHz to 6 GHz and operates on Windows.
Microwave USB Power Sensor (10 MHz to 8 GHz)	MA24108A	Supports 10 MHz to 8 GHz and operates on Windows.
Microwave USB Power Sensor (10 MHz to 18 GHz)	MA24118A	Supports 10 MHz to 18 GHz and operates on Windows.
Microwave USB Power Sensor (10 MHz to 26 GHz)	MA24126A	Supports 10 MHz to 26 GHz and operates on Windows.
High Performance Waveguide Mixer (50 GHz to 75 GHz)	MA2806A	It has the good features of both a harmonic mixer and a down converter and is ideal for spectrum analysis of millimeter-wave (50 GHz to 75 GHz) wireless transmitters now being used for future wider-band applications, such as IEEE 802.11ad W-LAN modules and wireless backhaul, etc.
High Performance Waveguide Mixer (60 GHz to 90 GHz)	MA2808A	It has the good features of both a harmonic mixer and a down converter and is ideal for spectrum analysis of millimeter-wave (60 GHz to 90 GHz) wireless transmitters now being used for future wider-band applications, such as wireless backhaul, automotive radar, etc.
External Mixer (26.5 GHz to 40 GHz)	MA2741C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (33 GHz to 50 GHz)	MA2742C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (40 GHz to 60 GHz)	MA2743C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (50 GHz to 75 GHz)	MA2744C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (60 GHz to 90 GHz)	MA2745C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (75 GHz to 110 GHz)	MA2746C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (90 GHz to 140 GHz)	MA2747C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (110 GHz to 170 GHz)	MA2748C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (140 GHz to 220 GHz)	MA2749C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (170 GHz to 260 GHz)	MA2750C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
External Mixer (220 GHz to 325 GHz)	MA2751C	It is a harmonic mixer for spectrum analysis of millimeter-wave transmitters.
AUX Conversion Adaptor	J1556A	AUX Conversion Adaptor J1556A Adapter for converting from AUX to BNC. Used for MARKER output from vector signal generator option, pulse modulation signals, baseband reference clock signals and Clock, Data and Enable signals for BER Measurement Function option. *: The Aux Conversion Adapter J1556A is a standard accessory supplied with the BER Measurement Function MS2840A-026.

Nominal (nom.): Values not warranted. Included to facilitate application of product.

Signal Analyzer MS2840A

Retrofit to Current MS2840A

Hardware Option Retrofit

The following hardware options can be retrofitted. Order the Z1932A Installation Kit as well. The MS2840A must be returned to the Anritsu plant for hardware retrofitting.

Model/Order No.	Name	ReferenceSteps		
Hardware Options	MS2840A-101* ¹	Rubidium Reference Oscillator Retrofit	2	
	MS2840A-102	High Stability Reference Oscillator Retrofit		
	MS2840A-177	Analysis Bandwidth Extension to 62.5 MHz Retrofit	3	
	MS2840A-178	Analysis Bandwidth Extension to 125 MHz Retrofit		
	MS2840A-108	Preamplifier Retrofit	4	
	MS2840A-168* ²	Microwave Preamplifier Retrofit (for MS2840A-046)		
	MS2840A-169* ²	26.5 GHz Microwave Preamplifier Retrofit (for MS2840A-044)		
	MS2840A-110	Phase Noise Measurement Function Retrofit		
	MS2840A-111	2ndary SSD Retrofit	8	
	MS2840A-116	Precompliance EMI Function Retrofit		
	MS2840A-117	Noise Figure Measurement Function Retrofit		
	MS2840A-119	2 dB Step Attenuator for Millimeter-wave		
	MS2840A-151	Noise Floor Reduction Retrofit		
	MS2840A-126	BER Measurement Function Retrofit		
	MS2840A-166	Low Phase Noise Performance Retrofit		6
	MS2840A-167	Microwave Preselector Bypass Retrofit		5
	MS2840A-120* ³	3.6 GHz Vector Signal Generator Retrofit	9	
	MS2840A-121* ³	6 GHz Vector Signal Generator Retrofit		
	MS2840A-122	Low Power Extension for Vector Signal Generator Retrofit	9-1	
	MS2840A-127	ARB Memory Upgrade 256 Msa for Vector Signal Generator Retrofit		
MS2840A-128	AWGN Retrofit			
MS2840A-129	Analog Function Extension for Vector Signal Generator Retrofit			
MS2840A-188	3.6 GHz Analog Signal Generator Retrofit	9		
MS2840A-189* ³	Vector Function Extension for Analog Signal Generator Retrofit	9-1		
MS2840A-182	CPU/Windows10 Upgrade Retrofit	—		
Application Parts	Z1932A	Installation Kit (Required when retrofitting options or installing software)	—	

*1: The Rubidium Reference Oscillator can be retrofitted to the MS2840A-040/041 with installed High Stability Reference Oscillator. In this case, the Rubidium Reference Oscillator is functional.

*2: The 26.5 GHz Microwave Preamplifier or Microwave Preamplifier can be retrofitted to the MS2840A-044/046 with installed Preamplifier. In this case, the 26.5 GHz Microwave Preamplifier or Microwave Preamplifier are functional.

*3: The following options are installed as standard and do not require separate orders when ordering the MS2840A-120/121/189. Standard waveform pattern MX269099A

Software Option Retrofit

The following software options can be retrofitted. Order the Z1932A Installation Kit as well. The MS2840A does not require return to the Anritsu plant for software retrofitting.

Model/Order No.	Name	Reference Steps	
Measurement Software	MX269017A	Vector Modulation Analysis Software	7
	MX269018A	Analog Measurement Software*	
	MX284059A	Pulse Radar Measurement Function	
Waveform generation tools (IQproducer)	MX269902A	TDMA IQproducer	9-2
	MX269904A	Multi-Carrier IQproducer	
Application Parts	Z1932A	Installation Kit (Required when retrofitting options or installing software)	—

*: Requires USB Audio A0086D

Software Update

Software is updated regularly to add new functions, improve performance and fix bugs. Download the latest software from the following URL. Register before use.

Software Download Site URL

<https://my.anritsu.com>

Options Configuration Guide

Hardware Configuration

Frequency range (MS2840A-040/041/044/046) not upgradable.

✓ = Can be installed, No = Cannot be installed, R = Require, U = Upgrade

Opt.	Name	Retrofit	Addition to Main frame				Combination with "Opt." (Refer to the left line)																															
			040 (3.6 GHz)	041 (6 GHz)	044 (26.5 GHz)	046 (44.5 GHz)	001	002	005 (standard install)	006 (standard install)	009 (standard install)	077	078	008	069	068	019	010	011	016	017	026	051	066	067	020	021	189	022	027	028	088	029	182				
001	Rubidium Reference Oscillator	Yes	✓	✓	✓	✓	✗	*5																														
002	High Stability Reference Oscillator	Yes	✓	✓	Equivalent function installed		✗	*5	✗		No			No	No	No								No														
005	Analysis Bandwidth Extension to 31.25 MHz	-	Standard install	Standard install	Standard install	No			✗	✗	✗				No																							
006	Analysis Bandwidth 10 MHz	-	Standard install	Standard install	Standard install	Standard install			✗	✗	✗																											
009	Bandwidth Extension to 31.25 MHz for Millimeter-wave	-	No	No	No	Standard install			No	No	✗												No		No	No	No	No	No	No	No	No	No	No	No	No		
077	Analysis Bandwidth Extension to 62.5 MHz*1	Yes	✓	✓	✓	✓				✗	✗	✗																										
078	Analysis Bandwidth Extension to 125 MHz*1	Yes	✓	✓	✓	✓					✗																											
008	Preamplifier	Yes	✓	✓	✓	✓																																
069	26.5 GHz Microwave Preamplifier	Yes	No	No	✓	No			No		No			*6	✗	No							No		No	No	No	No	No	No	No	No	No	No	No	No	No	
068	Microwave Preamplifier	Yes	No	No	No	✓			No	No				*6	✗	No							No		No	No	No	No	No	No	No	No	No	No	No	No	No	
019	2 dB Step Attenuator for Millimeter-wave	Yes	No	No	No	✓			No	No													No		No	No	No	No	No	No	No	No	No	No	No	No	No	
010	Preamplifier	Yes	✓	✓	✓	✓																																
011	2ndary SSD	Yes	✓	✓	✓	✓																																
016	Precompliance EMI Function	Yes	✓	✓	✓	✓																																
017	Noise Figure Measurement Function	Yes	✓	✓	✓	✓																																
026	BER Measurement Function	Yes	✓	✓	✓	✓																																
051	Noise Floor Reduction	Yes	✓	✓	✓	✓																																
066	Low Phase Noise Performance	Yes	✓	✓	No	No					No													No														
067	Microwave Preselector Bypass	Yes	No	No	✓	✓			No														No	✗	No	No	No	No	No	No	No	No	No	No	No	No	No	No
020	3.6 GHz Vector Signal Generator	Yes	✓	✓	No	No					No				No	No							No		✗	No	No							No				
021	6 GHz Vector Signal Generator	Yes	✓	✓	No	No					No				No	No							No		✗	No								No				
189	Vector Function Extension for Analog Signal Generator Retrofit	Yes	✓	✓	No	No					No				No	No							No		No	No	✗	No						R	No			
022	Low Power Extension for Vector Signal Generator	Yes	✓	✓	No	No					No				No	No							No		R	✗	No								No			
027	ARB Memory Upgrade 256 Msa for Vector Signal Generator*2	Yes	✓	✓	No	No					No				No	No							No		R	✗	No											
028	AWGN*2	Yes	✓	✓	No	No					No				No	No							No		R	✗	No											
088	3.6 GHz Analog Signal Generator*3	Yes	✓	✓	No	No					No				No	No							No	No	No	✗	No								No			
029	Analog Function Extension for Vector Signal Generator*3	Yes	✓	✓	No	No					No				No	No							No		R	✗	No	R	✗	No				No				
182	CPU/Windows10 Upgrade Retrofit*4	Yes	✓	✓	✓	✓																																

- *1: An image response is received when setting the bandwidth to more than 31.25 MHz. This can be used when not inputting a signal frequency outside the MS2840A analysis bandwidth (125 MHz max.). The Signal Analyzer MS2690A is recommended for other measurement purposes.
- *2: The ARB Memory Upgrade 256 Msa for Vector Signal Generator (MS2840A-027) and AWGN (MS2840A-028) are non-functional in the Analog Signal Generator (MS2840A-029/088).
- *3: Requires Analog Measurement Software (MX269018A).
- *4: Replace the MS2840A CPU board with Windows Embedded Standard 7 (Windows 7) and upgrade the operating system to Windows 10 IoT Enterprise LTSC2019. Windows 7 is installed in MS2840A units ordered until August 2020. Windows 10 is installed in MS2840A units ordered from September 2020 and has a label indicating C2 attached near the serial number.
- *5: The Rubidium Reference Oscillator can be retrofitted to the MS2840A-040/041 with installed High Stability Reference Oscillator. In this case, the Rubidium Reference Oscillator is functional.
- *6: The 26.5 GHz Microwave Preamplifier or Microwave Preamplifier can be retrofitted to the MS2840A-044/046 with installed Preamplifier. In this case, the 26.5 GHz Microwave Preamplifier or Microwave Preamplifier are functional.

Software Configuration

✓ = Can be installed, No = Cannot be installed, R = Require, U = Upgrade

Model	Name	Addition to Main frame				Analysis Bandwidth	
		040 (3.6 GHz)	041 (6 GHz)	044 (26.5 GHz)	046 (44.5 GHz)	077 (62.5 MHz)	078 (125 MHz)
MX269017A	Vector Modulation Analysis Software	✓	✓	✓	✓	✓	✓
MX269017A-001	APSK Analysis	✓	✓	✓	✓	✓	✓
MX269017A-011	Higher-Order QAM Analysis	✓	✓	✓	✓	✓	✓
MX269018A	Analog Measurement Software*	✓	✓	✓	✓		
MX284059A	Pulse Radar Measurement Function	No	No	✓	✓		

*: Requires USB Audio A0086D

Ordering Information

Please specify the model/order number, name and quantity when ordering.
The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No	Name
MS2840A	Main frame Signal Analyzer
	Standard accessories
P0031A	Power Cord: 1 pc
Z0541A	USB Memory (≥256 MB, USB2.0 Flash Driver): 1 pc
	USB Mouse: 1 pc
	Install CD-ROM
	(Application software, instruction manual CD-ROM): 1 pc
	Options
MS2840A-040	3.6 GHz Signal Analyzer
MS2840A-041	6 GHz Signal Analyzer
MS2840A-044	26.5 GHz Signal Analyzer
MS2840A-046	44.5 GHz Signal Analyzer
MS2840A-001	Rubidium Reference Oscillator
MS2840A-002	High Stability Reference Oscillator
MS2840A-077	Analysis Bandwidth Extension to 62.5 MHz
MS2840A-078	Analysis Bandwidth Extension to 125 MHz (Requires MS2840A-077)
MS2840A-008	Preamplifier
MS2840A-069	26.5 GHz Microwave Preamplifier (for MS2840A-044)
MS2840A-068	Microwave Preamplifier (for MS2840A-046)
MS2840A-010	Phase Noise Measurement Function
MS2840A-011	2ndary SSD
MS2840A-016	Precompliance EMI Function
MS2840A-017	Noise Figure Measurement Function
MS2840A-019	2 dB Step Attenuator for Millimeter-wave (for MS2840A-046)
MS2840A-051	Noise Floor Reduction
MS2840A-026	BER Measurement Function (AUX Conversion Adapter J1556A as standard accessory)
MS2840A-066	Low Phase Noise Performance
MS2840A-067	Microwave Preselector Bypass
MS2840A-020	3.6 GHz Vector Signal Generator
MS2840A-021	6 GHz Vector Signal Generator
MS2840A-022	Low Power Extension for Vector Signal Generator
MS2840A-027	ARB Memory Upgrade 256 Msa for Vector Signal Generator
MS2840A-028	AWGN
MS2840A-029	Analog Function Extension for Vector Signal Generator
MS2840A-088	3.6 GHz Analog Signal Generator
	Retrofit options
MS2840A-101	Rubidium Reference Oscillator Retrofit
MS2840A-102	High Stability Reference Oscillator Retrofit
MS2840A-177	Analysis Bandwidth Extension to 62.5 MHz Retrofit
MS2840A-178	Analysis Bandwidth Extension to 125 MHz Retrofit (Requires MS2840A-077 or 177)
MS2840A-108	Preamplifier Retrofit
MS2840A-169	26.5 GHz Microwave Preamplifier Retrofit
MS2840A-168	Microwave Preamplifier Retrofit
MS2840A-110	Phase Noise Measurement Function Retrofit
MS2840A-111	2ndary SSD Retrofit
MS2840A-116	Precompliance EMI Function Retrofit
MS2840A-117	Noise Figure Measurement Function Retrofit
MS2840A-119	2 dB Step Attenuator for Millimeter-wave Retrofit (for MS2840A-046)
MS2840A-151	Noise Floor Reduction Retrofit
MS2840A-126	BER Measurement Function Retrofit (AUX Conversion Adapter J1556A as standard accessory)
MS2840A-166	Low Phase Noise Performance Retrofit
MS2840A-167	Microwave Preselector Bypass Retrofit
MS2840A-120	3.6 GHz Vector Signal Generator Retrofit
MS2840A-121	6 GHz Vector Signal Generator Retrofit
MS2840A-122	Low Power Extension for Vector Signal Generator Retrofit
MS2840A-127	ARB Memory Upgrade 256 Msa for Vector Signal Generator Retrofit
MS2840A-128	AWGN Retrofit
MS2840A-129	Analog Function Extension for Vector Signal Generator Retrofit
MS2840A-188	3.6 GHz Analog Signal Generator Retrofit
MS2840A-189	Vector Function Extension for Analog Signal Generator Retrofit
MS2840A-182	CPU/Windows10 Upgrade Retrofit
MS2840A-282	CPU/Windows10 Upgrade Retrofit

Model/Order No	Name
	Software options
	DVD-ROM with License and Operation manuals
MX269017A	Vector Modulation Analysis Software
MX269017A-001	APSK Analysis
MX269017A-011	Higher-Order QAM Analysis
MX269018A	Analog Measurement Software (Requires USB Audio A0086D)
MX284059A	Pulse Radar Measurement Function
MX269902A	TDMA IQproducer
MX269904A	Multi-Carrier IQproducer
	Warranty service
MS2840A-ES210	2 years Extended Warranty Service
MS2840A-ES310	3 years Extended Warranty Service
MS2840A-ES510	5 years Extended Warranty Service
	Application parts
A0086D	USB Audio (for MX269018A)
J1556A	AUX Conversion Adapter (AUX → BNC), for vector signal generator option and BER measurement function option, standard accessory with BER Measurement Function MS2840A-026
MA24105A	Inline Peak Power Sensor (350 MHz to 4 GHz, with USB A to mini B cable)
MA24106A	USB Power Sensor (50 MHz to 6 GHz, with USB A to mini B Cable)
MA24108A	Microwave USB Power Sensor (10 MHz to 8 GHz, with USB A to micro B Cable)
MA24118A	Microwave USB Power Sensor (10 MHz to 18 GHz, with USB A to micro B Cable)
MA24126A	Microwave USB Power Sensor (10 MHz to 26 GHz, with USB A to micro B Cable)
MA2806A	High Performance Waveguide Mixer (50 GHz to 75 GHz)
MA2808A	High Performance Waveguide Mixer (60 GHz to 90 GHz)
MA2741C	External Mixer (26.5 GHz to 40 GHz)
MA2742C	External Mixer (33 GHz to 50 GHz)
MA2743C	External Mixer (40 GHz to 60 GHz)
MA2744C	External Mixer (50 GHz to 75 GHz)
MA2745C	External Mixer (60 GHz to 90 GHz)
MA2746C	External Mixer (75 GHz to 110 GHz)
MA2747C	External Mixer (90 GHz to 140 GHz)
MA2748C	External Mixer (110 GHz to 170 GHz)
MA2749C	External Mixer (140 GHz to 220 GHz)
MA2750C	External Mixer (170 GHz to 260 GHz)
MA2751C	External Mixer (220 GHz to 325 GHz)
Z1932A	Installation Kit (required when retrofitting options or installing software)

The following options are installed as standard and do not require separate orders when ordering the MS2840A-040/041/044.

Standard Software	MX269000A
Analysis Bandwidth 10 MHz	MS2840A-006
Bandwidth Extension to 31.25 MHz	MS2840A-005

The following options are installed as standard and do not require separate orders when ordering the MS2840A-046.

Standard Software	MX269000A
Analysis Bandwidth 10 MHz	MS2840A-006
Bandwidth Extension to 31.25 MHz for Millimeter-wave	MS2840A-009

• United States

Anritsu Americas Sales Company

450 Century Parkway, Suite 190, Allen, TX 75013 U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

• Sweden

Anritsu AB

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• Denmark

Anritsu A/S

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor., Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.

Representation Office in Spain

Paseo de la Castellana, 141. Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• Austria

Anritsu EMEA GmbH

Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• United Arab Emirates

Anritsu EMEA Ltd.

Anritsu A/S

Office No. 164, Building 17, Dubai Internet City
P. O. Box - 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

• India

Anritsu India Private Limited

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House, Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• Vietnam

Anritsu Company Limited

16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,
Dong Da District, Hanoi, Vietnam
Phone: +84-24-3201-2730

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A, New Caohejing International
Business Center No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyojeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817