

Quick Fact Sheet

Site Master™ S33xE and S36xE



S331E	S332E	S361E	S362E	
2 MHz to 4 GHz	2 MHz to 4 GHz 9 kHz to 4 GHz	2 MHz to 6 GHz	2 MHz to 6 GHz 9 kHz to 6 GHz	Cable & Antenna Analyzer Spectrum Analyzer

Compact Handheld Cable and Antenna Analyzer with Spectrum Analyzer

Everything you need to meet the challenges of today and tomorrow in a sleek, compact instrument that's less than 6 lbs.



Site Master™ is the preferred Cable and Antenna Analyzer of wireless service providers, contractors and installers. It is the most integrated Cable and Antenna Analyzer in the world.

Cable and Antenna Analyzer Key Features

- > Measurements: Return Loss, VSWR, Cable Loss, Distance-To-Fault, 1-port Phase, Smith Chart
- > 2-port Transmission Measurement: High/Low Power
- > Sweep Speed: 1 msec/data point, typical
- > Display: Single or Dual Measurement Touchscreen
- > Calibration: OSL, InstaCal, and FlexCal
- > Bias Tee: 32 V internal

Spectrum and Interference Analyzer Key Features

- > Measurements: Occupied Bandwidth, Channel Power, ACPR, C/I, Spectral Emission Mask
- > Interference Analyzer: Spectrogram, Signal Strength, RSSI, Signal ID, Interference Mapping
- > Coverage Mapping
- > Channel Scanner
- > AM/FM/PM Analysis
- > Dynamic Range: > 95 dB in 10 Hz RBW
- > DANL: -152 dBm in 10 Hz RBW
- > Phase Noise: -100 dBc/Hz max @ 10 kHz offset at 1 GHz
- > Frequency Accuracy: < ± 50 ppb with GPS Oninterfaces

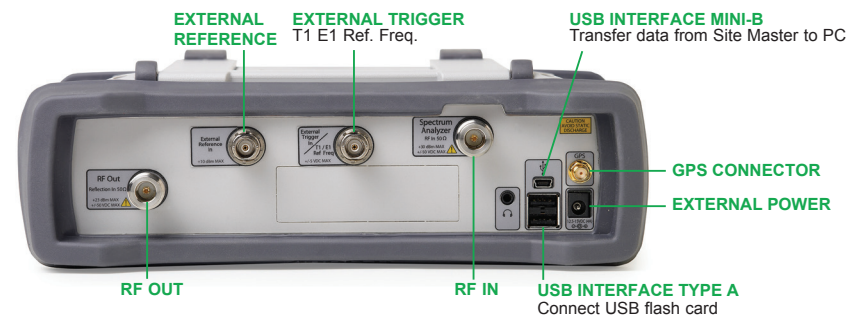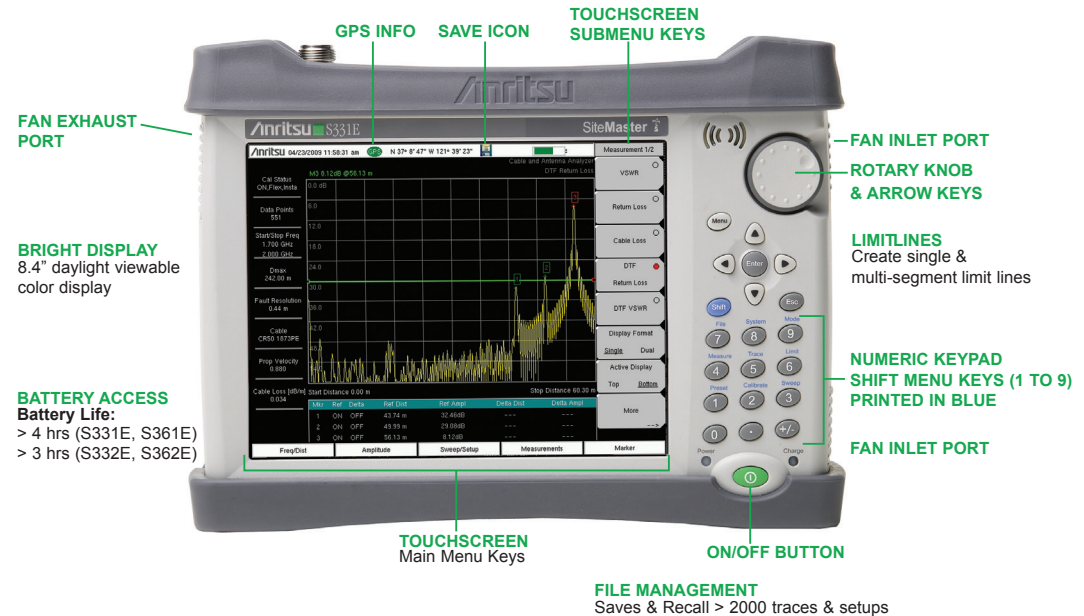

ALL CONNECTIONS ARE CONVENIENTLY LOCATED ON THE TOP PANEL, LEAVING THE SIDES CLEAR FOR HANDHELD USE.



Quick Fact Sheet

Site Master™ S33xE and S36xE



Key Specifications

Cable & Antenna Analyzer	
Frequency	2 MHz to 4 GHz (S331E, S332E), 2 MHz to 6 GHz (S361E, S362E)
Sweep Time	1 msec/data point, typical
Directivity	> 42 dB, OSL Calibration, > 38 dB, InstaCal™ Calibration
Dynamic Range	> 95 dB in 10 Hz RBW
Spectrum Analyzer	
Frequency	9 kHz to 4 GHz (S332E), 9 kHz to 6 GHz (S362E) (usable to 0 Hz)
DANL	-152 dBm in 10 Hz RBW
Phase Noise	-100 dBc/Hz max @ 10 kHz offset at 1 GHz
General	
Internal Trace	2,000 traces, 2,000 Setups
External Trace	Limited by size of USB Flash drive
Connectivity	Ethernet, USB cable, USB Memory Stick, and RS-232 Serial Null Modem cable
Display	Resistive Touchscreen, 8.4" daylight viewable color LCD, resolution 800 x 600
Temperature	Operating Temperature -10 °C to 55 °C
Battery	Li-Ion, 4.0 hours, typical (S331E, S361E), 3.0 hours, typical (S332E, S362E)
Dimensions	273 mm x 199 mm x 91 mm, (10.7 in x 7.8 in x 3.6 in)
Weight	2.71 kg, (6.0 lbs), (S331E, S361E), 3.71 kg, (8.2 lbs), (S332E, S362E)

Options

Option Number	Description
Option 0021	2-Port Transmission Measurement
Option 0010	Bias-Tee (requires Option 0021 for S331E/S361E)
Option 0031	GPS Receiver (requires Antenna P/N 2000-1528-R)
Option 0019	High Accuracy Power Meter (requires External Power Sensor)
Option 0029*	Power Meter
Option 0025*	Interference Analysis (Option 0031 recommended)
Option 0027*	Channel Scanner
Option 0431*	Coverage Mapping (requires Option 0031)
Option 0090*	Gated Sweep
Option 0028*	C/W Signal Generator (requires C/W Signal Generator Kit, P/N 69793)
Option 0509*	AM/FM/PM Analyzer
Option 0411	Ethernet Connectivity
Option 0098	Standard Calibration (ANSI 2540-1-1994)
Option 0099	Premium Calibration to Z540 plus test data

*Available in the S332E and S362E Only

Standard Accessories

Part Number	Description
3-68736	Soft Carrying Case
40-187-R	AC-DC Adapter
806-141-R	Automotive Cigarette Lighter 12 VDC Adapter
3-2000-1498	USB A/5-pin mini-B Cable, 10 feet/305 cm
	One Year Warranty (Including battery, firmware, and software)
	Certificate of Calibration and Conformance

Optional Accessories

Calibration Components, 50 Ω



Calibration Components, 75 Ω



Adapters



Phase-Stable Test Port Cables, Armored w/ Reinforced Grip



InterChangeable Adaptor Phase Stable Test Port Cables, Armored w/ Reinforced Grip



Phase-Stable Test Port Cables, Armored



Pricing | Ordering | Support

www.anritsu.com