


Anritsu Advancing beyond

Vector Network Analysis

Product Portfolio

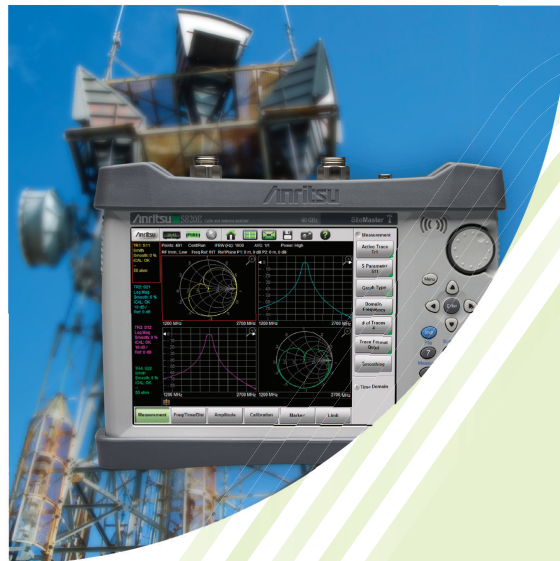

VNA Innovation Timeline



Wiltron 310 Impedance Meter
12 GHz coax
18 GHz WG

In 1965, Anritsu filed the patent that defined the first modern Vector Network Analyzer (VNA).

We are proud to continue that tradition of innovation to the present day—with the world's first portfolio of VNAs that bring Nonlinear Transmission Line (NLTL) technology to every measurement scenario from on-wafer device characterization to R&D testing to manufacturing and field operations.

1965


1987

1994

2001



360A VNA
40 MHz to 40 GHz




Lightning™ 37000E
40 MHz to 65 GHz




**Broadband and
mmWave VNA ME7808**
40 MHz to 110 GHz



**Site Master™
S820E**
1 MHz to 40 GHz




**VectorStar
ME7838D**
70 kHz to 145 GHz



VectorStar™ MS4640A
70 kHz to 20, 40, 50
and 70 GHz



**ShockLine™ 2- and
4-Port VNAs**
50 kHz to 43.5 GHz



**ShockLine ME7868A
2-Port VNA System**
1 MHz to 43.5 GHz

2006

2009


2011

2014


2020



**VNA Master™
MS202/3xA**
2 MHz to 6 GHz



**VectorStar
ME7838A**
70 kHz to 110 GHz



**VectorStar
ME7838G**
70 kHz to 220 GHz



**ShockLine MS46131A
1-Port VNA**
1 MHz to 43.5 GHz

Passive Components


Passive RF and microwave components such as antennas, filters, cables, and connectors are used in all types of wireless systems. These types of components typically require basic S-parameter and time domain testing to fully characterize their performance. Vector Network Analyzers (VNAs) are the optimal instrument to make those measurements.

Anritsu handheld Vector Network Analyzers are designed and optimized for field use and are able to make all of the passive measurements required in the field with high accuracy and repeatability. Distance Domain is standard on every Anritsu handheld VNA or Cable & Antenna Analyzer instrument, allowing users to quickly locate and identify faults within a coaxial or waveguide transmission system. High dynamic range enables easy antenna isolation measurements which is typically required at most sites. The highest RF immunity (+17 dBm) provides high accuracy and quality measurements, unaffected by strong RF/microwave signals which may be present nearby.



The ShockLine family of VNAs from Anritsu offer a broad range of configurations and performance levels to test a wide variety of passive components. Consisting of 1-, 2-, and 4-port models covering frequencies up to 92 GHz, ShockLine VNAs deliver the flexibility to economically test passive devices from simple cables and connectors all the way up to high performance 5G filters and E-band antennas. All of the ShockLine VNAs share common test software which enables an easy transition between verifying a device under test with a performance VNA model on the bench, and testing it with an economy model in manufacturing. Designed without embedded touch-screen or keypad, ShockLine

VNAs are very small and robust, minimizing space requirements and maximizing uptime.

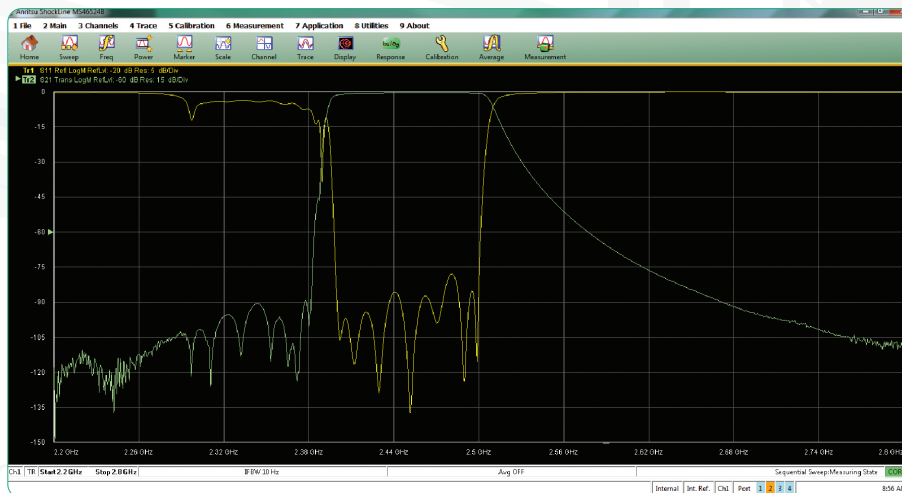

Band-Pass Filter Measurement with a ShockLine VNA

Passive Testing Challenges	Our Solutions
Designed for Field Use	
Need to make accurate, reliable measurements in typical outdoor environment with large temperature variations?	Anritsu handheld analyzers utilize Active Thermal Management which enables them to quickly stabilize to typical outdoor environments. This results in reliable measurement accuracy and repeatability in any environment. ▲
Need fully reversing 2-port VNA measurement capability in the field.	Anritsu has several models of 2-port fully reversing VNA analyzers with coverage up to 43.5 GHz. ■ ▲
Remote sites are often difficult to access, which makes traditional equipment transportation impossible.	Anritsu handheld analyzers are compact and typically weigh less than 7 lbs. Their compact size and weight allows them to be easily carried to remote locations. ▲
Access to AC power not readily available at some sites.	Anritsu handheld analyzers operate from an easily replaceable internal battery when AC power is not available. Spare batteries can be used to extend operation time if needed. ▲
Reduce the Cost of Test	
Need to reduce operating expenses (OPEX)? Multiple site visits are very costly and inefficient.	Since 1996 Anritsu has been the leader in handheld test and measurement equipment. Anritsu is the de facto standard around the world. ▲
Need to minimize the cost of test to stay competitive in your industry.	Anritsu offers a wide selection of VNAs to fit a broad range of passive device applications and budget. ● ■ ▲
Cannot afford costly downtime in your production environment.	ShockLine VNAs are compact and more robust without fragile keypad or display. ■
Need a low cost test solution without compromising performance.	You get high performance at a low cost. ■
Ease of Use	
Space is at a premium in the production environment.	Choice of multiple compact packages saves bench space and efficiently uses rack space. ■
Need seamless correlation of results from the design environment to the production environment.	Easily migrate from performance to economy models while moving from design to production. ■
Need simple setup and operation.	Anritsu's easyTest™ Tools software allows users to create work instruction files on a PC, deliver these files by e-mail, and then display work instructions on supported instruments and modes. ■ ▲
High Accuracy	
Need to evaluate connector design with highest available resolution.	Unique low-frequency coverage from 70 kHz and up to 70, 125, and 145 GHz in coax provides the best time domain measurement accuracy. ●
Accurately measure medium and high loss devices. Catch all potential filter feed-throughs in out-of-band regions.	Superior dynamic range, up to 142 dB at 2.5 GHz and 125 dB at 67 GHz. ●
Minimize the need for recalibration for different production line components.	High data resolution utilizing 100,000 point for maximum flexibility. Move to different frequency spans and still zoom in on narrow band responses without recalibration. ●
Improve productivity by reducing measurement guard bands utilizing optimum measurement uncertainty.	Best test port characteristic performance with up to 50 dB in directivity, source match and load match performance combined with industry-leading dynamic range provides excellent measurement accuracy. ●

Key to Symbols:

● VectorStar

■ ShockLine

▲ Master Products

Active Components

Active RF and microwave components such as amplifiers, mixers, and converters are used in many types of wireless systems including cellular, automotive, IoT, and 5G/6G applications. VNAs with source level control and receiver offset functionality can measure many of the typical active device test parameters like gain, distortion, and noise figure.

VectorStar offers a wide range of standard performance and instrument options for optimizing measurements of active devices. The high available power, up to +14 dBm at 20 GHz and +6 dBm at 67 GHz, provides enough power to measure compression properties of high power amplifiers without the need to search for external components. The high receiver compression point, +15 dBm at 70 GHz, often eliminates the need for additional external or internal attenuators.

The ShockLine MS4652xB Performance VNAs offer economical capabilities to test simple linear active devices not requiring the performance of VectorStar. ShockLine's optional direct access loops, bias-Tees (8.5 GHz models), ALC power control, and multiple embedded sources enable tests like gain and distortion measurements on simple active devices.

Active Measurements Suite

When measuring active devices, the Active Measurement Suite options provide a wide range of analysis tools for proper characterization of devices, components, and systems. First, there is the choice of two or four internal step attenuators for forward and reverse sweeps. This provides the opportunity to reduce instrument costs when maximum power range control in the reverse direction is not needed. Next, the measurement suite includes internal bias tees allowing component biasing directly through the VNA test port rather than needing external bias tee components. The measurement suite includes gain compression software that greatly simplifies the compression analysis process. With a power sweep configured, the software provides automatic normalization for easy identification of the start in gain roll off. The software also provides the ability to set flags indicating the user defined gain compression points with data provided in graph or tabular format. In addition, the swept power can be programmed for multiple frequencies for full analysis using the multiple frequency gain compression function.

Noise Figure Measurements

The Noise Figure Measurement Option adds the capability to measure noise figure of active devices from 70 kHz to 145 GHz. The noise figure measurement is based on a cold source technique for improved accuracy. Various levels of match and fixture correction are available for additional enhancement. VectorStar is the only VNA platform optimized for measuring noise figure up to 110 and 145 GHz utilizing a unique receiver for noise figure measurements.



Millimeter-Wave (mmWave) Noise Figure Measurements with a VectorStar VNA

Pulse Measurements

The Anritsu VectorStar MS4640B with PulseView™ option offers the most advanced architecture available in a VNA for pulse measurements. It offers industry-leading performance that eliminates the tradeoffs and limitations of prior test methods. Higher resolution, greater timing accuracy, and longer record lengths coupled with a real-time display give users the performance and confidence needed to meet the most demanding radar pulse measurement requirements. Industry-leading 2.5 ns measurement resolution allows users to get a true view of their device performance and see behavior they may have been missing. Unlike traditional methods, the PulseView option does not require sacrificing dynamic range and accuracy when analyzing devices with narrow duty cycles; users get the same 100 dB dynamic range in all settings.

Active Module/Sub-system Testing Challenges	Our Solutions
High Performance	
Need a high performance analyzer for fast, efficient and accurate device and component measurements in an R&D lab environment.	VectorStar VNAs offer a broad range of active device applications and budget. ●
	Programmable source levels for active gain testing. ●
	Enables harmonic distortion testing. ●
	Low noise floor enable noise figure and distortion measurements. ●
	Easily create active device tests using multiple programming methods: SCPI, IVI-C, scripting, easyTest, and 3rd party environments such as LabVIEW. ● ■
Design and develop high performance amplifiers quickly and efficiently.	VectorStar provides a wide range of active device characterization including the highest performing pulse analysis, highest frequency noise figure measurements, and accurate IMD measurements utilizing NLTL samplers. ●
	IMDView™ provides the ability to automatically switch between S-parameter measurements and intermodulation characterization using the optional internal second source and combiner. ●
Generate accurate device models using wide bandwidth characterization.	Only VNA with single sweep coverage starting as low as 70 kHz and sweeping up to 110, 125, 145, and 220 GHz through a single coaxial connector. The wide, stable electronic power control to as low as -55 dBm ensures that the device is accurately modeled well within the linear operating region. ●
Reduce the Cost of Test	
Maximize current equipment budgets while protecting the investment for future needs.	The VectorStar platform supports a wide variety of upgrades including higher frequencies, higher port count, and increased capabilities. The only VNA platform that provides an upgrade path from a 2-port VNA to a 4-port system with upper frequencies to 70 GHz in baseband and up to 110, 125, 145, or 220 GHz in broadband configuration. Protect investments by purchasing what is needed today and upgrading to additional capabilities when budget and need allows. ●

Key to Symbols:

● VectorStar

■ ShockLine

▲ Master Products

Broadband and Millimeter-Wave (mmWave) On-Wafer

Semiconductor manufacturing test engineers face increased challenges today related to broadband mmWave on-wafer testing. Developing accurate models often requires measuring frequencies that range from near DC up to 100+ GHz. Achieving accurate, stable measurements over extended time periods is a challenge for foundries and for fabless semiconductor companies that require extensive testing of on-wafer devices.

Obtain the most thorough and accurate broadband device characterization while eliminating time-consuming, error prone concatenation process across the RF, microwave, and mmWave frequency bands. This stable broadband performance means users can make high accuracy measurements all day, with the confidence that calibrations remains rock solid! Spend less time calibrating and more time measuring.

Broadband and Millimeter-Wave (mmWave) On-wafer Testing Challenges	Our Solutions
Improve on-wafer measurement performance and add additional mmWave bands without having to replace existing probe stations with large, expensive alternatives.	Anritsu's modern architecture provides a solution that is a fraction of the size and weight of other solutions. The mmWave modules fits on smaller probe stations and may be directly mounted to the probe. The broadband system incorporating the unique NLTL modules offer frequency coverage starting at 70 kHz and operating up to 110, 125, 145, and 220 GHz.
Need to eliminate high frequency cable losses and cable instabilities.	VectorStar and ShockLine's mmWave measurement capability is accomplished using modules tethered to the instrument through 1 m or 5 m cables, which enables the VNA to provide more power with higher dynamic range at the DUT.

Key to Symbols: ● VectorStar ■ ShockLine ▲ Master Products



MS46522B with E-Band Frequency Options
55-92 GHz mmWave Options (1 m, 5 m) are the Best Value and Most Convenient Solutions on the Market for Production Testing and Over-The-Air Characterization of E-band Components



Compact and Lightweight mmWave Modules
Our Solution is Less than the Weight and the Volume of other Solutions, Enabling Low Cost Installation on Smaller Probe Stations

Signal Integrity

Today's signal integrity (SI) engineers are challenged to meet high data rates, minimize costs, and close the loop of simulation and measurement. For example, VectorStar MS4640B's industry-leading low-frequency measurement capability, as low as 70 kHz, coupled with upper range as high as 70 or 220 GHz, ensure that simulation-busting DC extrapolation and causality issues are minimized and your simulations match reality.

For lower frequency SI verification and testing, ShockLine MS4652xB series offers 2- and 4-port broadband models to 43.5 GHz. VectorStar and ShockLine include a suite of built-in tools for de-embedding single ended or differential test fixtures without the need for external software programs for accurate signal integrity measurements of backplanes, SERDES, and other devices of interest.


Signal Integrity (SI) Testing Challenges	Our Solutions
Perform accurate SI characterization of high speed data channels using quality low frequency measurements with high performance upper frequency coverage.	VectorStar has a low frequency receiver which covers 70 kHz to 2.5 GHz combined with a high frequency receiver operating to 20, 40, 50, and 70 GHz in the baseband unit. By using the best architecture for each band, high performance is achieved at all frequencies including best dynamic range 500 MHz and below. ●
Need to ensure that high speed devices comply to USB 3.1 and Thunderbolt 3 test specs.	ShockLine provides verification of latest high speed devices. ■
Interactive eye-diagram characterization for design and debug.	VectorStar with option 47 (Eye Diagram) offers live trace-based eye-diagram capabilities for SI testing. ●
Testing and verifying skew, crosstalk, and other SI specifications.	ShockLine with option 22 (Advanced Time Domain) incorporates third party SI software into the ShockLine software, enabling NEXT, FEXT, and other SI tests. ■

Key to Symbols:



● VectorStar

■ ShockLine

▲ Master Products

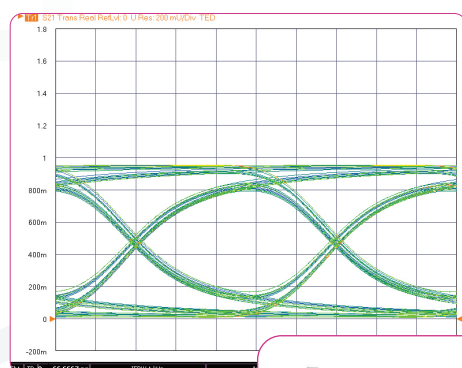


VectorStar VNA
Eye Diagram
Measurement
Has Live Update
with Every
Frequency Sweep

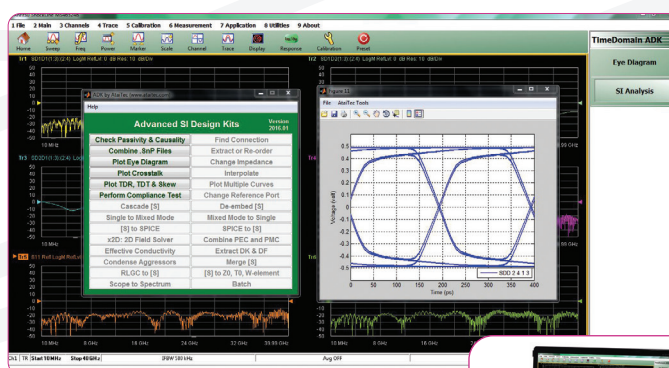

Shockline VNA
SI Measurements Using
Advanced Time Domain



Anritsu Vector Network Analyzers

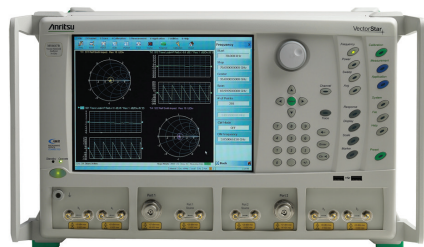

Bench

VectorStar MS464xB

70 kHz to 20/40/50/70 GHz




Manufacturing

ShockLine 1-Port USB VNA MS46121B

150 kHz to 6 GHz

ShockLine 1-Port Modular VNA MS46131A

1 MHz to 8/20/43.5 GHz

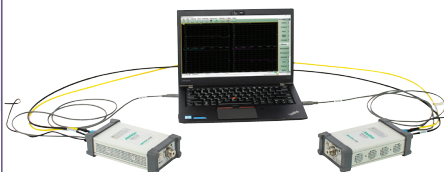

Field

VNA Master MS2036C

5 kHz to 6 GHz

VectorStar 4-Port Broadband VNA

ME7838A4


70 kHz to 110/125 GHz

ME7838D4

70 kHz to 145 GHz

ME7838G4

70 kHz to 220 GHz



VectorStar Broadband VNA

ME7838A/E/D/G

70 kHz to 110/125/145/220 GHz
with banded mmWave modules
up to 1.1 THz

ShockLine Compact USB VNA

MS46122B

1 MHz to 8/20/43.5 GHz

ShockLine Economy VNA

MS46322B

1 MHz to 8/20/43.5 GHz

ShockLine Modular 2-Port VNA System

ME7868A

1 MHz to 8/20/43.5 GHz



ShockLine Performance VNAs

MS46522B

50 kHz to 8.5/20/43.5 GHz
55 GHz to 92 GHz

ShockLine Performance VNAs

MS46524B

50 kHz to 8.5/20/43.5 GHz



Microwave Site Master Handheld Cable & Antenna Analyzer

S82xE

1 MHz to 40 GHz



Specifications are subject to change without notice.

• **United States**

Anritsu Americas Sales Company

450 Century Parkway, Suite 190, Allen, TX 75013 U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• **Canada**

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• **Brazil**

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• **Mexico**

Anritsu Company, S.A. de C.V.

Bld Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• **United Kingdom**

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• **France**

Anritsu S.A.

12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• **Germany**

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• **Italy**

Anritsu S.r.l.

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

• **Sweden**

Anritsu AB

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• **Finland**

Anritsu AB

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• **Denmark**

Anritsu A/S

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• **Russia**

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor., Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• **Spain**

Anritsu EMEA Ltd.

Representation Office in Spain

Paseo de la Castellana, 141. Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• **Austria**

Anritsu EMEA GmbH

Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• **United Arab Emirates**

Anritsu EMEA Ltd.

Anritsu A/S

Office No. 164, Building 17, Dubai Internet City
P. O. Box - 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

• **India**

Anritsu India Private Limited

6th Floor, Indique ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• **Singapore**

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House, Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• **Vietnam**

Anritsu Company Limited

16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,
Dong Da District, Hanoi, Vietnam
Phone: +84-24-3201-2730

• **P.R. China (Shanghai)**

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A, New Caohejing International
Business Center No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• **P.R. China (Hong Kong)**

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• **Japan**

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• **Korea**

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• **Australia**

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• **Taiwan**

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20210610



Anritsu utilizes recycled paper and environmentally conscious inks and toner.



© Anritsu All trademarks are registered trademarks of their
respective owners. Data subject to change without notice.
For the most recent specifications visit: www.anritsu.com

11410-00905, Rev. M Printed in United States 2023-01
©2023 Anritsu Company. All Rights Reserved.