

MX860903A

cdma Measurement Software

(For MS8609A Digital Mobile Radio Transmitter Tester)



For Evaluation of cdmaOne, cdma2000 1xRTT Transmission System

Supporting cdmaOne and cdma2000 1xRTT

Evaluation of 1xRTT Transmission System with Single Unit

MX860903A cdma Measurement Software is the application software used in the MS8609A Digital Mobile Radio Transmitter Tester. The installation of MX860903A enables evaluation of base station or mobile transmitters conforming to the cdmaOne and cdma2000 1xRTT standards.

• Items measured by MX860903A

Modulation analysis:

Carrier frequency, vector error, phase error, magnitude error

Code domain analysis:

Code domain power, code domain timing offset, code domain phase offset

Amplitude measurement: Transmission power

Spurious close to the carrier measurement


Spurious measurement

Occupied bandwidth measurement

I/Q level measurement


Parameter Setup

A setup screen is provided for the entry of required parameters for modulation accuracy and code domain power measurements in cdmaOne or cdma2000 1xRTT analysis. Measurement can be performed after parameter setup.

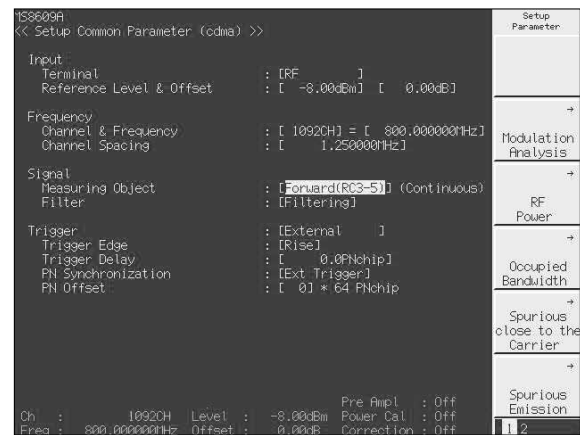

Modulation Accuracy Measurement


Frequency error, modulation accuracy and code domain analysis are performed and then results are displayed on the screen. The measurement accuracy is 1% (typical value) of residual vector error (rms).

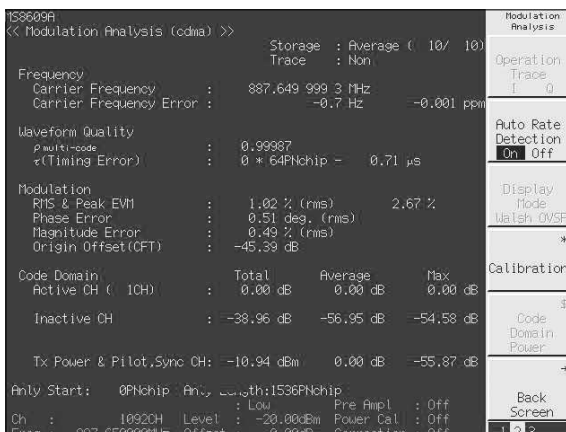

BTS Code Domain Analysis


Only 2 seconds are required for code domain analysis of 1xRTT signals, RC-1 through RC5 can be measured. Spreading factor of each code is automatically detected and displayed on the screen.

*Radio Configuration

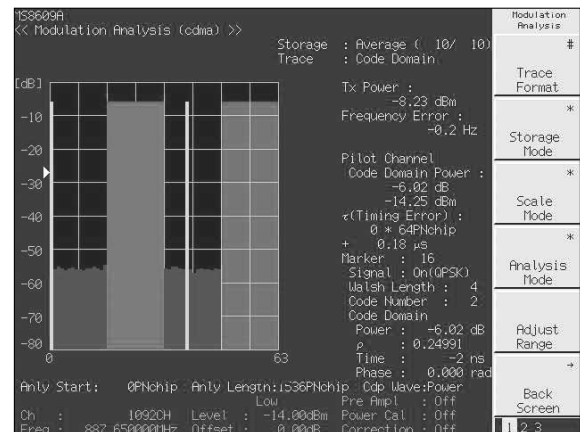


MS Code Domain Analysis

Perform code domain analysis of 1xRTT signals in RC3 and RC4 in only 2 seconds. Code domains of I/Q phase are displayed on the screen.

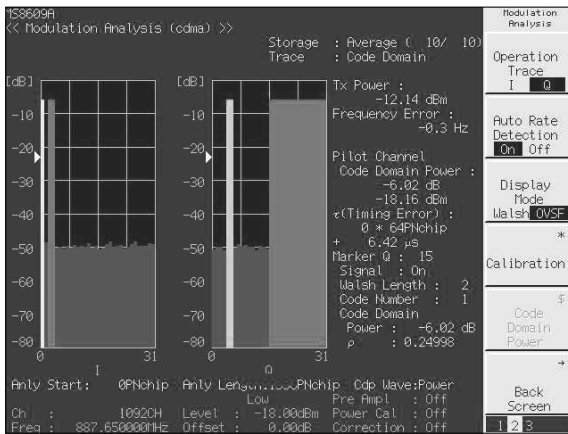


Spurious Close to the Carrier Measurement

Spurious close to the carrier is measured using the spectrum analyzer function. The PASS/FAIL result of a template judgement is displayed on the screen.

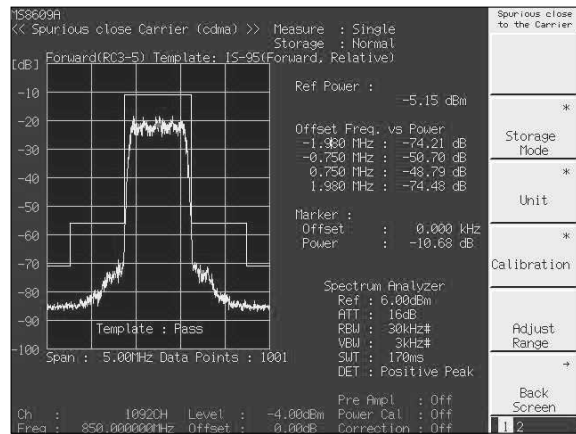


Transmission Power Measurement

When transmission power is measured both the value and signal waveform are displayed on the screen. High accuracy power measurements are achieved using the built-in power meter function.

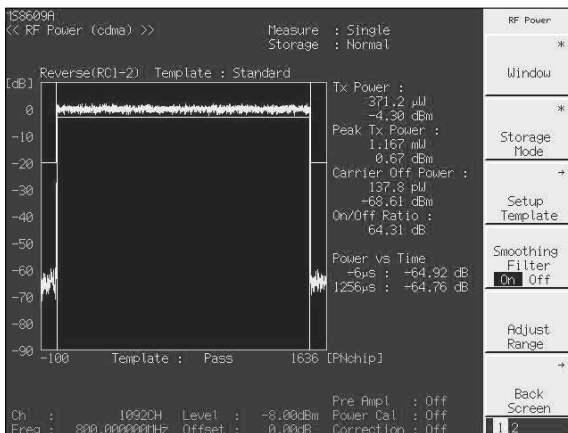

Spurious Measurement

A frequency table can be set up in spurious measurement to provide a PASS/FAIL measurement result. Fifteen different frequencies and their limit values can be entered.

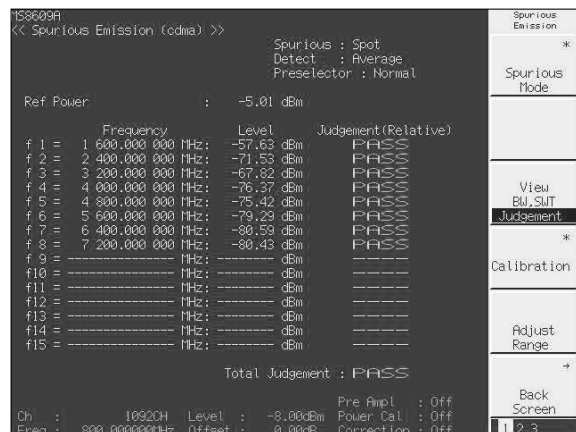

Specifications

Following specifications are guaranteed after optimized internal level (Range of internal receiver is automatically adjusted by pushing Adjust Range key).

Modulation/frequency measurement	<p>Measurement frequency range: 50 MHz to 2.3 GHz Measurement level range: -40 to +20 dBm (average power within burst, pre-amp off) -60 to +10 dBm (average power within burst, pre-amp on[Ⓝ]) Carrier frequency accuracy: \pm(reference oscillator accuracy + 10 Hz) *Input level: \geq-30 dBm (pre-amp off), \geq-40 dBm (pre-amp on[Ⓝ]), at 1 code channel Modulation accuracy (residual vector error): <2.0% (rms) *Input level: \geq-30 dBm (pre-amp off), \geq-40 dBm (pre-amp on[Ⓝ]), at 1 code channel Origin offset accuracy: \pm0.50 dB *Input level: \geq-30 dBm (pre-amp off), \geq-40 dBm (pre-amp on[Ⓝ]), at 1 code channel, relative to signal with origin offset of -30 dBc Waveform display: Displays the following items for 1 CH to multi CH input signals; constellation, eye pattern, vector error vs. chip number, phase error vs. chip number, amplitude error vs. chip number</p>
Code domain analysis	<p>Measurement frequency range: 50 MHz to 2.3 GHz Measurement level range: -40 to +20 dBm (average power within burst, pre-amp off) -60 to +10 dBm (average power within burst, pre-amp on[Ⓝ]) Code domain power accuracy: \pm0.1 dB (code power: \geq-10 dBc), \pm0.3 dB (code power: \geq-25 dBc) Display function: Code domain power, code domain timing offset, code domain phase offset</p>
Amplitude measurement	<p>Frequency range: 50 MHz to 2.3 GHz Measurement level range: -40 to +20 dBm (average power within burst, pre-amp off) -60 to +10 dBm (average power within burst, pre-amp on[Ⓝ]) Tx power measurement: (after level calibration using built-in power meter, automatic operation by pushing key) Measurement range: -20 to +20 dBm (average power within burst, pre-amp off) -20 to +10 dBm (average power within burst, pre-amp on[Ⓝ]) Accuracy: \pm0.40 dB Power measurement linearity: \pm0.20 dB (0 to -40 dB) *Input level: \geq+10 dBm (pre-amp off), \geq-20 dBm (pre-amp on[Ⓝ]) , unchanged reference level setup after range adjustment Burst analysis: Rising/falling characteristics and on/off ratio analysis function</p>
Occupied bandwidth measurement	<p>Frequency range: 50 MHz to 2.3 GHz Measurement level range: -40 to +20 dBm (average power within burst, pre-amp off) -60 to +10 dBm (average power within burst, pre-amp on[Ⓝ]) Measurement method Sweep method: Sweeps signal using spectrum analyzer and calculates result FFT method: Analyzes signal with FFT and calculates result</p>
Spurious close to the carrier measurement	<p>Frequency range: 50 MHz to 2.3 GHz Input level range: 0 to +20 dBm (average power within burst, pre-amp off) Measurement method: Calculates and displays the ratio of Tx power to the power measured by spectrum analyzer with sweep method Tx power measurement Tx power method: Carrier power measured in 1.23 MHz bandwidth SPA method: Carrier power measured in RBW: 3 MHz, VBW: 3 kHz, detection mode: sample, frequency span: 0 Hz Measurement range: \geq50 dBc (900 kHz offset), \geq60 dBc (1.98 MHz offset) *Input level (average power within burst): \geq0 dBm (pre-amp off), RBW: 30 kHz, VBW: 300 kHz, detection mode: positive</p>

Spurious measurement	<p>Measurement frequency range: 10 MHz to 12.75 GHz (except within ±50 MHz of carrier frequency)</p> <p>Input level range (Tx power): 0 to +20 dBm (average power within burst)</p> <p>Measurement method</p> <p>Sweep method: Sweeps specified frequency range using spectrum analyzer and calculates ratio of carrier power and peak value detected during the sweep. Detection mode is average.</p> <p>Spot method: Measures average power of specified frequencies in time domain using spectrum Analyzer and calculates ratio of carrier power and measured power of the frequencies Detection mode is average.</p> <p>Search method: Sweeps specified frequency range using spectrum analyzer and detects frequency of peak spurious. Measures average power of the detected frequencies in time domain using spectrum analyzer and calculates ratio of carrier power and the measured power for the frequencies. Detection mode is Average.</p> <p>Tx power measurement</p> <p>Tx power method: Carrier power measured in 1.23 bandwidth</p> <p>SPA method: Carrier power measured in RBW: 3 MHz, VBW: 3 kHz, detection mode: sample, frequency span: 0 Hz</p> <p>Measurement range (typical)</p> <p>79 dB (RBW: 10 kHz, 10 to 30 MHz, Band 0)</p> <p>79 dB (RBW: 100 kHz, 30 to 1000 MHz, Band 0)</p> <p>*Carrier frequency: 800 to 1000 MHz/1.8 to 2.2 GHz, reference value of power ratio in Tx power</p>
Electric performance (I/Q input)	<p>Input impedance: 1 MΩ (parallel capacitance: <100 pF), 50 Ω</p> <p>Balance input</p> <p>Differential voltage: 0.1 to 1 Vp-p, In-phase voltage: ±2.5 V</p> <p>Unbalance input: 0.1 to 1 Vp-p</p> <p>DC/AC coupling: Changeable</p> <p>Measurement items:</p> <p>Modulation accuracy, code domain power, amplitude, occupied bandwidth (FFT method), I/Q level</p> <p>Modulation accuracy measurement: (residual vector error): <2% (rms) *DC coupling, input level: ≥0.1V (rms)</p> <p>I/Q level measurement: Measures input level of I and Q (rms, p-p)</p> <p>I/Q phase difference measurement: When the CW signal is inputted to I and Q input terminals, measures and displays the phase difference between I- and Q-phase signals.</p>

*1: Can be set when MS8608A-08 option is installed in the main frame.

*2: When carrier frequency is in a 2030.354 to 2200 MHz range, spurious will be generated at the frequency below.
f (spurious) = f (input) – 2030.345 MHz

Ordering Information

Please specify the model/order number, name and quantity when ordering.

Model/Order No.	Name	Remarks
MX860903A	Main frame cdma Measurement Software	For cdmaOne and cdma2000 1xRTT
JT32MA-NT1 W1865AE	Standard accessories PC-ATA card (32 MB): 1 pc cdma measurement software operation manual (Vol. 1): 1 copy	MX860903A software for backup



Specifications are subject to change without notice.

Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

● U.S.A.

Anritsu Company

1155 East Collins Blvd., Richardson, TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

● Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

● Brazil

Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27 - 1 Andar
01327-010-Paraiso-São Paulo-Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

● U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

● France

Anritsu S.A.

9 Avenue du Québec, Z.A. de Courtabœuf
91951 Les Ulis Cedex, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

● Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

● Italy

Anritsu S.p.A.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

● Sweden

Anritsu AB

Borgafjordsgatan 13, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

● Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

● Denmark

Anritsu A/S

Kirkebjerg Allé 90, DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

● United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

● Singapore

Anritsu Pte. Ltd.

10, Hoe Chiang Road, #07-01/02, Keppel Towers,
Singapore 089315
Phone: +65-6282-2400
Fax: +65-6282-2533

● P.R. China (Hong Kong)

Anritsu Company Ltd.

Suite 923, 9/F., Chinachem Golden Plaza, 77 Mody Road,
Tsimshatsui East, Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

● P.R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 1515, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 10004, P.R. China
Phone: +86-10-6590-9230
Fax: +86-10-6590-9235

● Korea

Anritsu Corporation, Ltd.

8F Hyunjuk Building, 832-41, Yeoksam Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

● Australia

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

● Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

● India

Anritsu Corporation

India Liaison Office

Unit No. S-3, Second Floor, Esteem Red Cross Bhavan,
No. 26, Race Course Road, Bangalore 560 001, India
Phone: +91-80-32944707
Fax: +91-80-22356648

Please Contact: