

MultiFlow 5000

Multilayer Switch Family

Anritsu's MultiFlow 5000 heralds a new era in high-speed LAN/MAN/WAN convergence based on Layer 2/3/4 switching.

- Four traffic priority levels assure proper delivery of IP voice traffic
 - Unique OC-48 SONET capability for LAN/MAN Ethernet backbone extension
 - Unique OC-3 ATM and V.35/X.21 WAN interfaces
 - Full redundancy of all components for maximum reliability
 - Full wire-speed IP, IPX, and AppleTalk routing based on Anritsu ASIC technology
 - Full wire-speed Layer 2/3/4 switching
 - Full wire-speed Layer 2/3/4 and server load balancing
 - Complete IP Multicast routing support
 - Full wire-speed Layer 2/3/4 filtering
-



MultiFlow 5128

- 12-slot chassis with redundant AC or DC power supplies and fans
 - 8 slots for network interface modules
 - 4 slots for primary and redundant management and switching modules
 - 24 Mpps forwarding capability
 - Supports up to 128 Fast Ethernet or 48 Gigabit Ethernet ports
 - LAN/MAN interface modules support 1 OC-48 SONET, 6 1000BASE-T, 2 and 6 1000BASE-SX/LX, 16 10/100BASE-TX, or 8 100BASE-FX ports per slot
 - WAN interface modules support 1 ATM OC-3 or 4 V.35/X.21 ports per slot
-



MultiFlow 5064

- 8-slot chassis with redundant AC or DC power supplies and fans
 - 4 slots for network interface modules
 - 4 slots for primary and redundant management and switching modules
 - 12 Mpps forwarding capability
 - Supports up to 64 Fast Ethernet or 24 Gigabit Ethernet ports
 - LAN/MAN interface modules support 1 OC-48 SONET, 6 1000BASE-T, 2 and 6 1000BASE-SX/LX, 16 10/100BASE-TX, or 8 100BASE-FX ports per slot
 - WAN interface modules support 1 ATM OC-3 or 4 V.35/X.21 ports per slot
-




MultiFlow 5048 and MultiFlow 5024

- Standalone units with built-in power supply, fans, CPU, and multilayer switching
- 11 Mpps (5048) and 6.6 Mpps (5024) forwarding capability
- Fixed configuration of 32 Fast Ethernet (10/100BASE-TX) ports on MultiFlow 5048 and 24 ports on MultiFlow 5024
- Fixed configuration of 2 Gigabit Ethernet (1000BASE-SX or -LX) ports
- 2 expansion slots (MultiFlow 5048 only) support 1 1000BASE-SX/LX, 2 1000BASE-T, 8 10/100BASE-TX, 4 100BASE-FX, 1 ATM OC-3, or 2 V.35/X.21 additional ports per slot

Application Example: Storage Area Networking

MultiFlow 5000 Layer 2/3/4 switches provide high-speed network connectivity within the campus or local area (LAN), the metropolitan area (MAN), and wide-area (WAN) including IP WAN links over T1 or ATM OC-3. Their unique OC-48 links are ideal for extending both enterprise LAN backbones and storage area networks (SANs) over metro or wide areas, with separate LAN and SAN data sharing the same 2.5 Gbps full duplex link. These OC-48 interfaces handle all Ethernet-compatible traffic including 802.1q VLANs as well as routed IP, IPX, or AppleTalk traffic. Fibre Channel SAN data can thus be carried as switched Ethernet or as routed IP traffic. They support WDM as well as dark fiber up to 80 km.

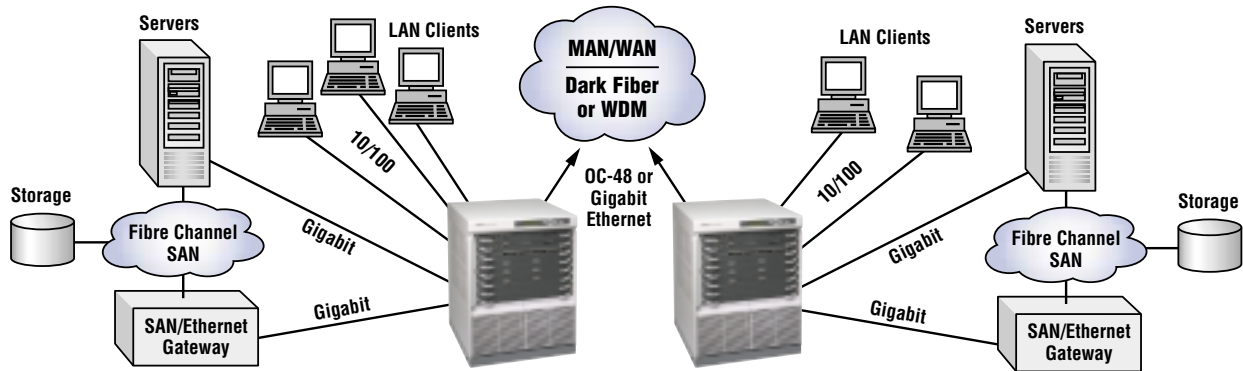

Brief Specifications

MultiFlow 5128/5064 Interface Modules

- 10/100BASE-TX (16 ports)
- 100BASE-FX (8 ports)
- 1000BASE-SX or -LX (2 and 6 port versions)
- 1000BASE-T (6 ports)
- OC-48 SONET (2 slots): up to 80 km (1 port)
- ATM OC-3 (155 Mbps): IPoA, VC/VP shaping (1 port)
- V.35/X.21: up to DS2, IP Over PPP, IPSec, VPN (4 ports)

MultiFlow 5048 Interface Modules

- 10/100BASE-TX (8 ports)
- 100BASE-FX (4 ports)
- 1000BASE-SX or -LX (1 port)
- 1000BASE-T (2 ports)
- ATM OC-3 (155 Mbps): IPoA, VC/VP shaping (1 port)
- V.35/X.21: up to DS2, IP Over PPP, IPSec, VPN (2 ports)

Full Wire-Speed Performance

- Layer 3 IP, IPX, and AppleTalk wire-speed forwarding
- Layer 2 wire-speed forwarding

Full Standard Routing and IP Multicast

- IPv4, IPX, and AppleTalk
- RIPv1/v2, OSPFv2, PIM-DM, DVMRP, IGMPv2, IPX RIP/SAP, RTMP/ZIP/NBP
- IPv6 planned

Reliability and Redundancy

- Hot-swappable interface modules, management and switching modules, fans, and power supplies
- Optional redundant management and switching modules and power supplies
- VRRP Virtual Router Redundancy Protocol
- Anritsu Quick Recovery (AQR) Layer 2 link failure recovery mechanism

Priorities and QoS for Voice and Data Traffic

- 4-level traffic priority
- 802.1p and DiffServ

Link Aggregation (Trunking)

- Complies with 802.3ad standard
- Each trunk group supports up to 8 Fast Ethernet, Gigabit Ethernet, and OC-48 ports in any combination

Full Wire-Speed Classification and Filtering

- Traffic classification and filtering at full speed based on Layer 2, Layer 3, and Layer 4 parameters

Load Balancing

- Layer 2 load balancing over multi-port trunks
- Layer 3 load balancing via Equal-Cost Multipath Routing (RFC2328) over LAN/WAN links
- Layer 4 server load balancing

Other High-Performance Capabilities

- Supports up to 1024 VLANs with 802.1Q tagging and GARP Group VLAN Registration Protocol (GVRP)
- 802.1d Spanning Tree
- Multiple VLAN-based spanning trees

Management

- SNMPv1/v2 and 4-group RMON on all ports
- RS-232C and telnet console connections
- Web-based configuration and management
- HP OpenView for Windows NT/2000

Anritsu

ANRITSU COMPANY

1155 East Collins Boulevard
Richardson, TX 75081
Tel: 1-800-ANRITSU (800-267-4878)
or 1-972-644-1777

Fax: 1-972-671-1877
Email: moreinfo@anritsu.com
URL: www.us.anritsu.com/networking

