ZONE	REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
--	A	INITIAL RELEASE	LAB	TN	07-04	AT

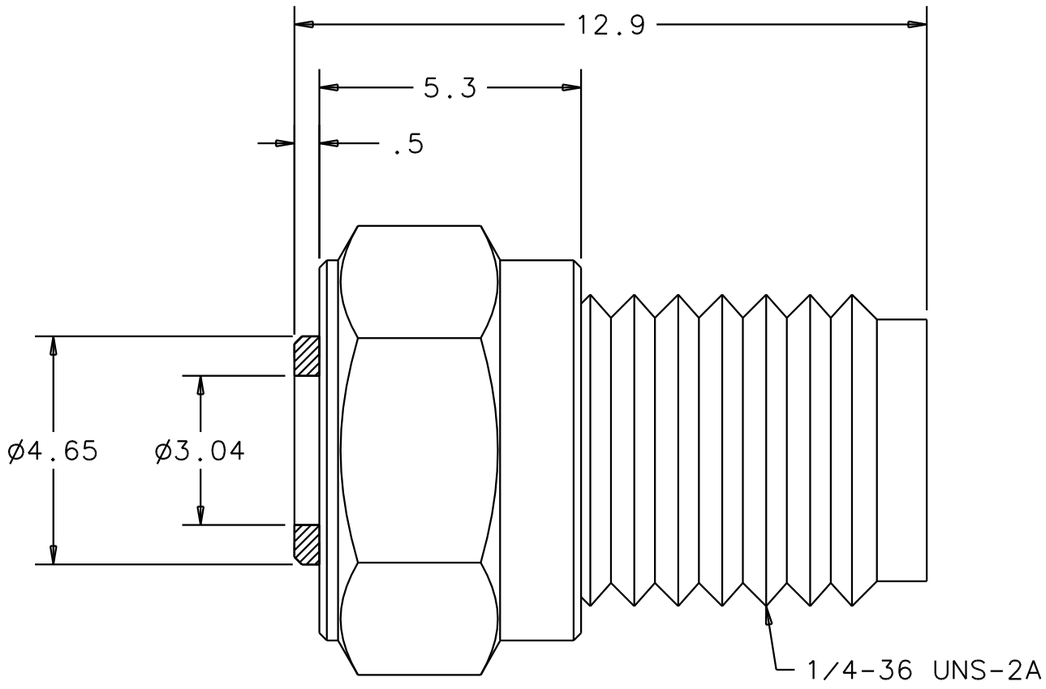

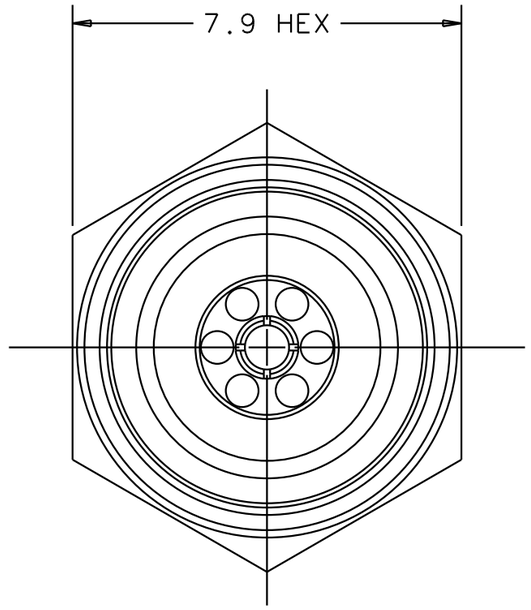

NOTES:

1. ELECTRICAL:

    1.1 FREQUENCY: DC TO 40GHz
    1.2 VSWR: 1.433

2. MECHANICAL:

    2.1 FRONT-SIDE PIN DEPTH: 0.000 TO -0.13mm
    2.1 COUPLING NUT TIGHTNING TORQUE: 1.36N-m MAX

3. OPERATING TEMPERATURE: -55°C TO 125°C

4. MATERIAL:

    4.1 OUTER CONDUCTOR: HEAT TREATED BeCu, GOLD PLATED OVER NICKEL
    4.2 CENTER CONDUCTOR:
        HEAT TREATED BeCu, GOLD PLATED OVER NICKLE
    4.3 DIELECTRIC: POLYPHENYLENE OXIDE

DIMENSIONS ARE FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS (mm)

SEE PRODUCT STRUCTURE_____

ALL INFORMATION SHOWN ON THIS SPECIFICATION IS PROPRIETARY INFORMATION OF ANRITSU COMPANY

DO NOT SCALE DRAWING

DRAWN TIEN NGUYEN DATE 07-04
CHECKED A. THOMAS DATE 07-04
APPROVED A. THOMAS DATE 07-04

TOLERANCES:
UNLESS OTHERWISE SPECIFIED
1 PLACES ANGLES ±--
2 PLACES
3 PLACES SURFACE FINISH --

FINISH ------

MATERIAL: SEE SEPARATE PRODUCT STRUCTURES

Anritsu 490 JARVIS DRIVE MORGAN HILL,CA. 95037

TITLE
OUTLINE, K101F
CABLE CONNECTOR

FSCM NO. 20944
DRAWING NO. 63320
REV A
SCALE -
UNDER ECN CONTROL 07-04 DATE BY AT M.E
SHEET 1 OF 1