



1

2

3

4

ZONE	REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
--	A	INITIAL RELEASE	LAB	TN	07-04	AT

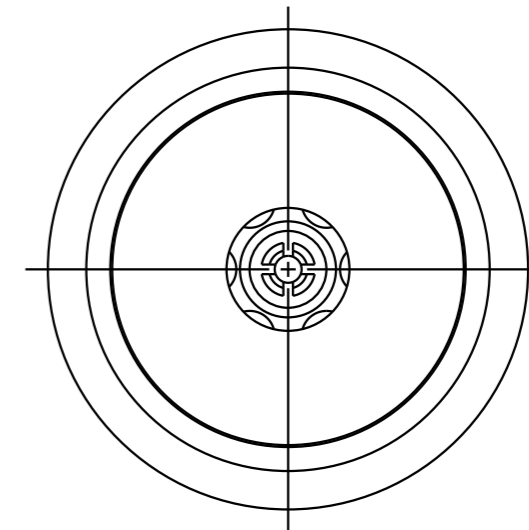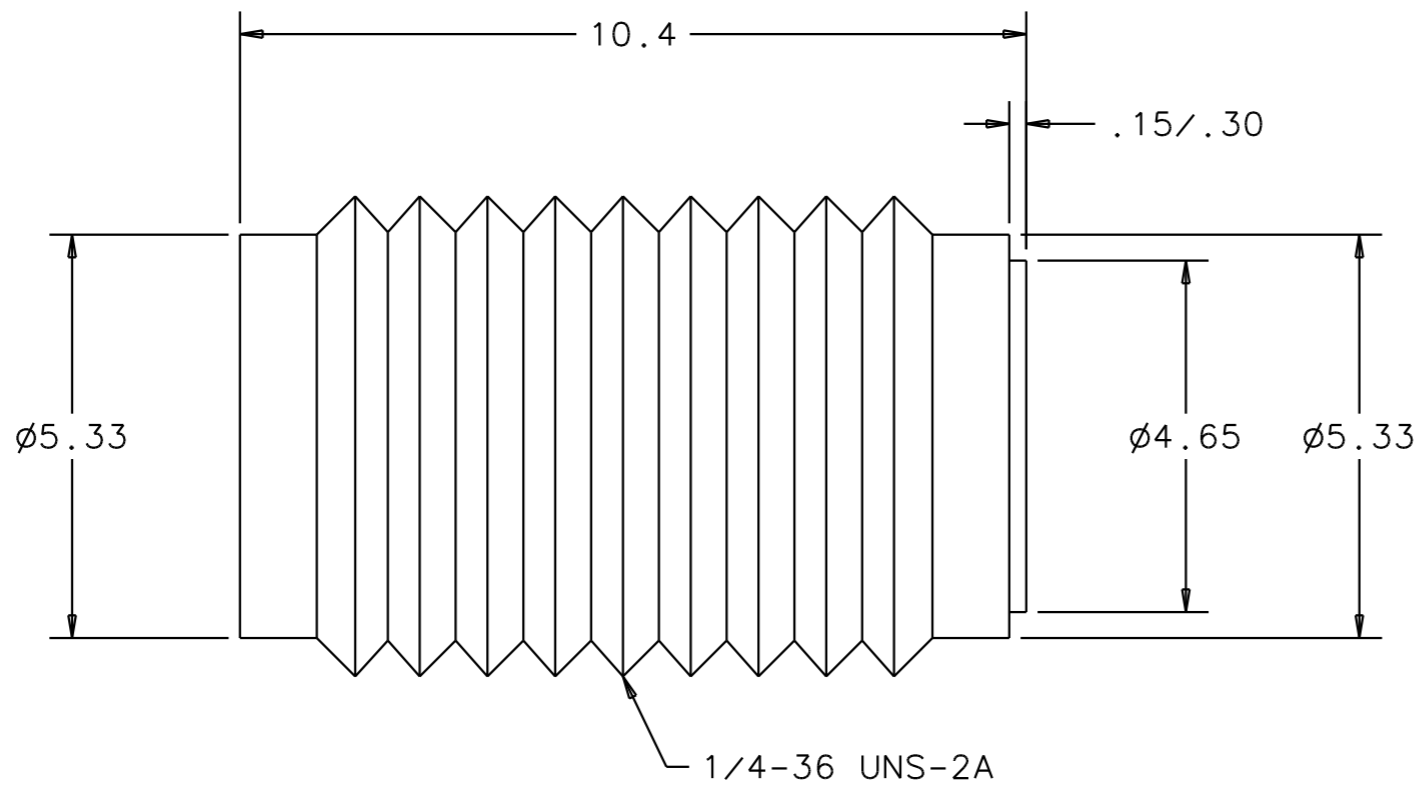

NOTES:

1. ELECTRICAL:

- 1.1 FREQUENCY: DC TO 40GHz.
- 1.2 VSWR: 1.433.

2. MECHANICAL:

- 2.1 FRONT-SIDE PIN DEPTH: 0.000 TO -0.13mm.

3. OPERATING TEMPERATURE: -55°C TO 125°C.

4. MATERIAL:

- 4.1 OUTER CONDUCTOR: PASSIVATED STAINLESS STEEL.
- 4.2 BEAD HOLDER: PASSIVATED STAINLESS STEEL.
- 4.3 CENTER CONDUCTOR: HEAT TREATED BERYLLIUM COPPER, GOLD PLATED OVER NICKLE.
- 4.4 DIELECTRIC: POLYPHENYLENE OXIDE.

DIMENSIONS ARE FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS (mm)	DRAWN TIEN NGUYEN	DATE 07-04	MATERIAL: SEE SEPARATE PRODUCT STRUCTURES		
	CHECKED A. THOMAS	DATE 07-04	490 JARVIS DRIVE MORGAN HILL, CA. 95037		
	APPROVED A. THOMAS	DATE 07-04			
SEE PRODUCT STRUCTURE _____	TOLERANCES: UNLESS OTHERWISE SPECIFIED		TITLE OUTLINE, K102F CONNECTOR		
ALL INFORMATION SHOWN ON THIS SPECIFICATION IS PROPRIETARY INFORMATION OF ANRITSU COMPANY	1 PLACES	ANGLES ±--	FSCM NO. 20944	DRAWING NO. 63322	REV A
	2 PLACES	SURFACE FINISH			
DO NOT SCALE DRAWING	3 PLACES	FINISH	SCALE -	UNDER ECN CONTROL 07-04 BY AT M.E	SHEET 1 OF 1