

Identifying Sources of External PIM



Background:

Passive intermodulation (PIM) is a well-known problem in cellular systems. Downlink signals at the cell site mix at passive, non-linear junctions in the RF path, creating new signals. If these new signals (intermodulation products) fall in an operator's uplink band, they can elevate the noise floor and degrade system performance.

Factory PIM test equipment has been commercially available for over 20 years. RF equipment manufacturers use this equipment to verify that the components they produce are low PIM. Third order intermodulation product (IM3) levels below -107 dBm (-150 dBc) when tested using 2×43 dBm (20 W) test signals are commonly achieved. Field PIM test equipment was introduced approximately a decade later and is used to ensure that the completed cell site is low PIM. The field test not only verifies the condition of the RF components but also verifies that the installation crew applied proper workmanship techniques while assembling the site. IM3 levels below -100 dBm (-143 dBc) are often specified and achieved.

Even with low PIM components and perfect installation techniques, a site can still exhibit very poor PIM performance due to PIM sources located beyond the antenna. In these instances, signals emitting from the antenna excite non-linear objects in the main beam of the antenna as well as non-linear objects in any direction within a few wavelengths of the antenna. These non-linear objects radiate or directly couple IM products back into the antenna system at surprisingly high levels. It is not uncommon for external PIM sources to generate IM3 as high as -50 dBm (-93 dBc) when measured at the system receiver!

External PIM is typically caused by loose metal-to-metal contacts. Some of these PIM sources are relatively easy to identify:

- Air handling equipment on the rooftop
- Overlapping layers of metal flashing
- Sheet metal cable trays
- Sheet metal roof vents
- Rusty metal objects

Other external PIM sources are not so obvious:

- Loose metal-to-metal connections hidden from view by roofing materials
- Loose cable hangers behind the antenna

In 2010, Anritsu invented and developed a patented technology that pinpoints PIM faults called Distance-to-PIM™ (DTP). DTP shows the location for PIM problems within the antenna system, as well as distance to external PIM sources outside the antenna system. This was an incredible step

forward in improving the quality of information received from the on-site PIM test. But one problem still remained for pinpointing external PIM beyond the antenna, DTP could tell you how far away from the antenna the PIM source was located, but not the angle. If the antenna had a 120° beamwidth, the PIM could be located anywhere along the 120° arc at the distance measured by DTP.

In addition, depending on the site configuration, there can be multiple PIM sources simultaneously in play, both in front of and behind the antenna. This is often the case on rooftop sites where the antennas are recessed from the edge of the building or hidden behind concealment panels to improve site aesthetics.



Tools are now available from Anritsu to help technicians determine the precise location of external PIM. Using the Anritsu PIM Hunter™ probe in conjunction with a spectrum analyzer, technicians can use traditional interference hunting techniques to locate external PIM sources in the field. This document describes the test process as well as provides important guidelines to consider while testing.

The Test Process:

The process begins with a traditional field PIM test. A PIM analyzer such as the Anritsu MW82119B PIM Master™ is used to generate two high power CW test signals that are injected into the system under test. These signals travel through the antenna feed system and radiate any PIM sources in the RF path. PIM sources beyond the antenna act like point source radiators, sending IM product signals in all directions from the point of origin. These signals travel back in the direction of the antenna, through the antenna feed system and arrive at the PIM analyzer receiver. The magnitude of the third order intermodulation product frequency (IM3) is measured by the PIM analyzer and displayed.

If the PIM level is higher than desired, record this value, then estimate how far away the offending PIM source is from the antenna aperture. This can be determined by using the DTP / DTP overlay function of the PIM Master as described in application note 11410-00869. This function compares the distance between a PIM source placed on the antenna aperture to the actual PIM source(s) present at the site and reports the relative distance. Record this value. Armed with this information, you have an approximate starting distance to begin your external PIM hunt.




Field Master™ MS2080A



PIM Hunting with Field Master MS2080A and 2000-1884-R PIM Hunter Probe

Since the PIM analyzer uses two CW test signals to excite PIM sources in the system, the IM3 signal generated is also a CW signal. Connect the Anritsu PIM Hunter probe and an appropriate band-pass filter to the RF IN port of the spectrum analyzer and tune the spectrum analyzer center frequency to match the same IM3 frequency measured by the PIM analyzer. Set a Limit Line at approximately 10 dB lower than the IM3 level you are looking for and turn ON the Limit Alarm. Start the PIM analyzer to generate the high power test tones and begin hunting for external PIM sources. When the IM3 value measured on the spectrum analyzer increases above the limit line, the audible alarm sounds, meaning you are near a PIM source.

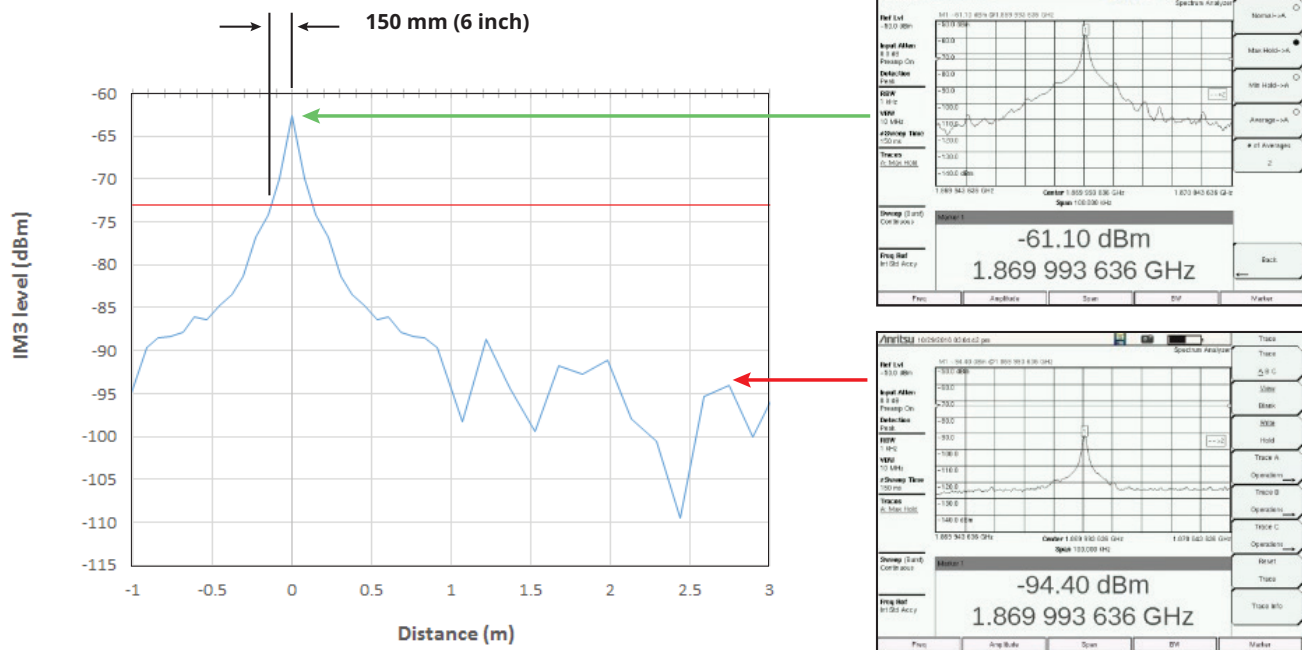

IM3 Signal Level vs. Distance from an External PIM Source

As shown in the figure above, when the probe tip comes in close proximity to a PIM source, the IM3 value measured on the spectrum analyzer increases rapidly. When the probe tip is moved beyond the PIM source, the IM3 level decreases rapidly. The change in IM3 value is typically 10 dB within 150 mm (six inches) from the PIM source. Move the probe tip back and forth in the area of interest until the maximum signal location is identified. Mark these spots with highly visible tape or cover the area with PIM absorbing material and continue hunting. Continue probing the field until all significant external PIM sources have been identified.

It is not uncommon for high signal variation to occur when the probe tip is far away from PIM sources. This is due to multipath fading of the IM3 signal from multiple PIM sources or from reflective surfaces at the site. Once close to a PIM source, the signal from that PIM source becomes dominant, reducing signal level variation.

Important Considerations:

Safety: Care must be taken while hunting for external PIM sources to ensure that technicians performing the test are not exposed to RF fields in excess of the local jurisdiction's maximum allowable occupational exposure limit. In the United States, the Federal Communications Commission (FCC) occupational/controlled exposure limits between 300 MHz and 10 GHz are shown in the table below. As a wireless professional working near antennas, it is important to know your local exposure requirements and maintain safe working distances. Safe working distances can be calculated for various site configurations using the equations provided below.

Frequency	Occupational/Controlled Exposure (mW/cm ²)
300 MHz to 1500 MHz	$F \text{ (MHz)} / 300$
1500 MHz to 100,000 MHz	5

Calculations / Conversions:

$EIRP_{dBm} = \text{Test power (dBm)} + 3 \text{ dB} + \text{Antenna gain (dBi)} - \text{Direction adjustment (dB)} - \text{Cable loss (dB)}$

(3 dB is added above because two high power test tones are present)

$EIRPW = (10^{(EIRP_{dBm} / 10)} / 1000)$

$MPE (W/m^2) = MPE (mW/cm^2) * 10$

$\text{Safe Distance} = \sqrt{EIRPW / (4\pi * MPE (W/m^2))}$

Definitions:

$EIRP_{dBm}$ = Effective Isotropic Radiated Power in dBm

$EIRPW$ = Effective Isotropic Radiated Power in Watts

$MPE (W/m^2)$ = Maximum Permissible Exposure in W/m²

$MPE (mW/cm^2)$ = Maximum Permissible Exposure in mW/cm²

Direction adjustment = Front-to-Side ratio or Front-to-Back ratio based on the antenna pattern

Safe Distance = Distance from antenna where MPE is achieved

Using the FCC limits and assuming test cable loss = 0.5 dB, Front-to-side ratio = 15 dB and Front-to-back ratio = 25 dB for 65° Panel Antenna, the following safe working distances can be calculated:


Antenna type	Frequency	Gain (dBi)	Test power (dBm)	Distance (front)	Distance (side)	Distance (rear)
65° Panel Antenna	700 – 900 MHz	15.5	43	2.0 m	0.4 m	0.1 m
65° Panel Antenna	1700 – 2100 MHz	17.5	43	1.8 m	0.3 m	0.1 m
Omni Antenna	700 – 900 MHz	12.0	43	1.3 m	N/A	N/A
Omni Antenna	1700 – 2100 MHz	12.0	43	0.9 m	N/A	N/A
Small Omni Antenna	700 – 900 MHz	3.5	37	0.3 m	N/A	N/A
Small Omni Antenna	1700 – 2100 MHz	5.0	37	0.2 m	N/A	N/A

Clearly, it is important to be aware of these safe working distances while hunting for external PIM. The PIM Hunter probe is approximately 1m in length, allowing you to probe locations near antennas while remaining in compliance with occupational exposure limits. If it becomes necessary to probe areas close to the front of an antenna, do so with your body behind or beside the antenna.

Band-pass filters: One of the worst PIM sources at the cell site is the receiver on your spectrum analyzer! If the high power test tones used to excite external PIM sources are able to reach the receiver front end, extremely high PIM levels will be generated within the spectrum analyzer itself. To prevent this, a high quality bandpass filter must be installed between the PIM Hunter probe and the input port of the spectrum analyzer. This filter must allow the IM3 signal of interest to pass while attenuating the two high power test signals generated by the PIM analyzer. The same filters available for use with the Anritsu MA2700A Interference Hunter™ work well for this application. See Technical Datasheet 11410-00719 for available filters.



Band-Pass Filter with Plastic Case Removed

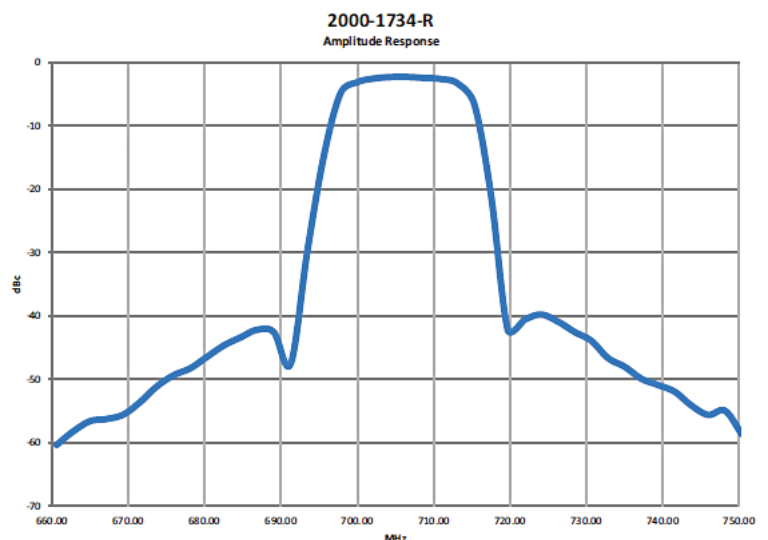

For the best real time response to detecting PIM signals, a MS2090A or MS2080A Field Master spectrum analyzer with the RTSA and Interference Finder (Option 24) is required. Select the IA RTSA mode.

The spectrum analyzer is used to locate PIM by detecting the IM3 product signal level. The PIM Master transmits two high power CW tones which cause IM3 products to be generated when they are incident on a PIM source such as a metallic junction that acts as a diode. With the spectrum analyzer in RTSA Interference Analyzer mode, the following sequence outlines a typical configuration.

FREQ/SPAN

- Set the center frequency to the IM3 frequency
- Set the span to 100 kHz

AMPLITUDE

- Set the Ref Level to -20 dBm
- Preamp ON
- Auto Attenuation OFF
- Attenuation Level 0 dB


MEASURE

- MEASUREMENT: Interference
- SETUP
 - Integration bandwidth 10 kHz
 - Max level -40 dBm
 - Min level -80 dBm
 - Volume 100%
 - Mute OFF


Note: Tap the padlock icon above the amplitude scale to prevent manual changes to the maximum level line unintentionally adjusting the amplitude scale.

For the following PIM hunting example, we will use the PIM Probe for determining the precise location of PIM sources. This can also be done using a directional antenna, in which case, the technician can sweep an area by pointing the antenna at a precise spot. The PIM Master and spectrum analyzer are now ready to start the PIM hunt. In this mode, in addition to showing the results on the screen, the Field Master spectrum analyzers generate an audio tone whose pitch and volume matches the strength of the PIM level detected (so it basically acts like a metal detector for PIM). As the probe tip is passed closer to a PIM source, the audio tone increases in volume and pitch, indicating the precise location of the possible PIM source. The use of the audio tone also helps ensure the technician's safety as now they do not need to continually watch the level of the IM signal on the screen of the spectrum analyzer, and can remain more aware of their surroundings.

Use the limit alarm feature of the spectrum analyzer to provide an audible alarm only when the probe tip is near a PIM source. This allows the operator to "listen for PIM sources" rather than having to constantly focus on the spectrum analyzer display. Adjust the limit level up or down as required to only generate tones when the probe tip is within 0.25 meter of significant PIM sources.

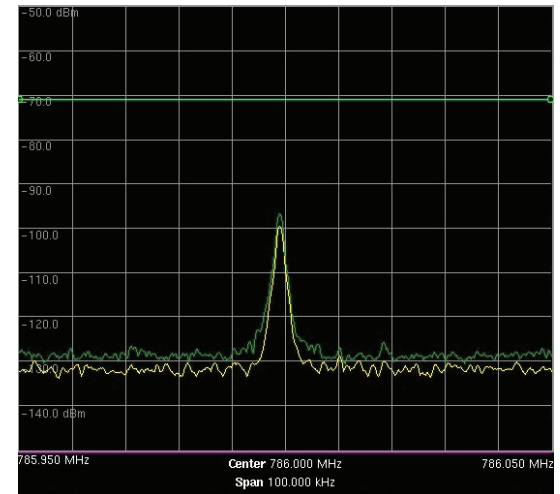


IM3 Level Seen When Away from a PIM Source

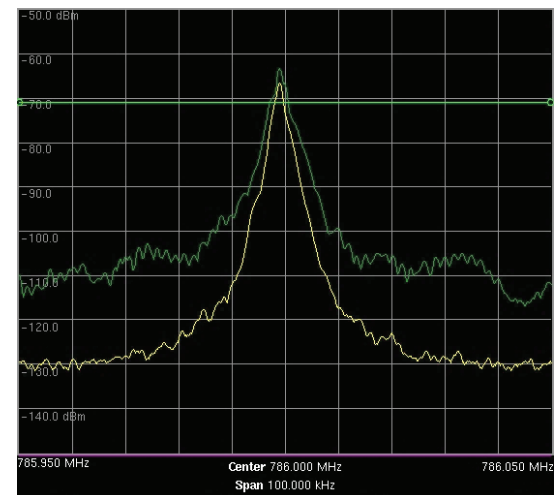

IM3 Level Seen When Near a PIM Source

Max hold on the B trace is useful for comparing the maximum IM3 level detected to the current IM3 level. If an audible alarm is heard while scanning across an area, slow down and scan the area more slowly looking for the location where the maximum occurred. Once a PIM source location is identified and marked, use the Reset Trace function to reset the maximum trace before hunting the next PIM source.

Be conscious of where you are standing: As it turns out, your body is a pretty good attenuator. If you stand between the antenna and a PIM source, the PIM level may reduce by >30 dB. While probing, be conscious of where the antenna is located and make sure the PIM Hunter probe tip is not being “shadowed” by your body.

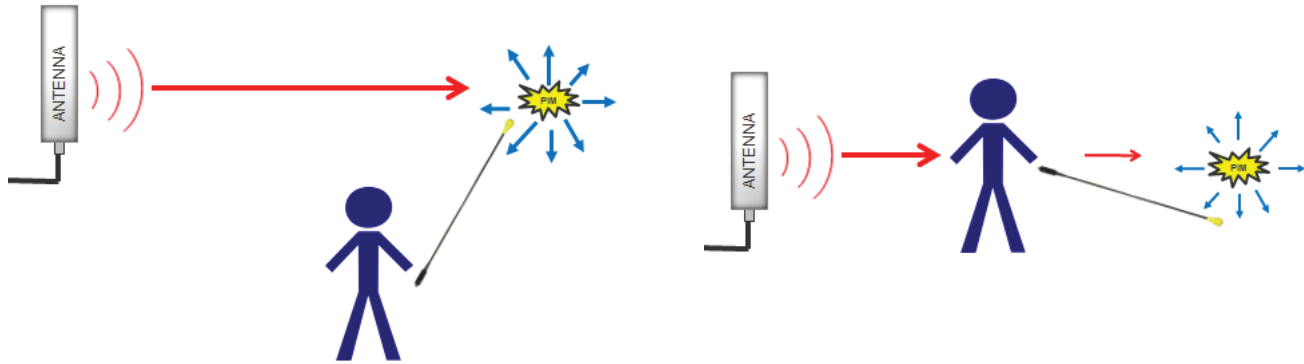

PIM is always high directly in front of the antenna: When probing screening walls or metal objects less than one wavelength in front of an antenna, the CW test signals entering the probe will be significantly higher. Even with a high quality bandpass filter, the test tone levels may not be attenuated enough to prevent false PIM readings. Increasing the attenuation level on the spectrum analyzer and/or reducing the test power level on the PIM analyzer may improve results when testing near the face of the antenna.


PIM seems to be coming from everywhere: The external PIM hunting process works well if the PIM sources are truly external. If, however, the dominant PIM source is inside the antenna system, the antenna will spray the IM3 frequency into the environment. The radiated IM3 signal will bounce off of metal objects in front of the antenna, causing just about everything to look like a PIM generator. In some cases, just holding the PIM Hunter probe in the air will generate a high PIM result. With experience, you will learn to recognize this effect and focus your attention back to the antenna rather than the environment..

PIM levels change dramatically and I am not moving the probe: At any given moment, the PIM Hunter system is detecting the vector sum of all PIM sources arriving at the probe tip. In some cases, there may be a highly variable PIM source somewhere on the sector that is extremely sensitive to mechanical movement. Shifting your weight may cause a PIM source three meters away to increase in magnitude by 40 dB! The PIM Hunter probe will detect this increase, even if the probe is not directly over the source. Try standing as still as possible while moving the probe around to see if the signal level changes. For this same reason, it is highly recommended that only one person be moving on the rooftop at a time while the PIM hunt is in progress.

Another thing to keep in mind is that the IM3 frequency you are measuring may also be in use by mobiles attempting to communicate with the cell site. If you see short, bursty signals that raise the noise floor across the full 100 kHz bandwidth of the display, you are likely seeing live traffic. If the signal level from mobiles persists, change your test settings on both the PIM analyzer and the spectrum analyzer to move the IM3 frequency to unused spectrum.

Correcting the PIM Problems after Identification

In some cases, external PIM sources can be easily repaired on the first PIM hunting visit to a site. Examples might include removing rust and applying a fresh coat of paint to steel objects, tightening mounting hardware, or wrapping metal objects in RF absorbing foam to attenuate the PIM.

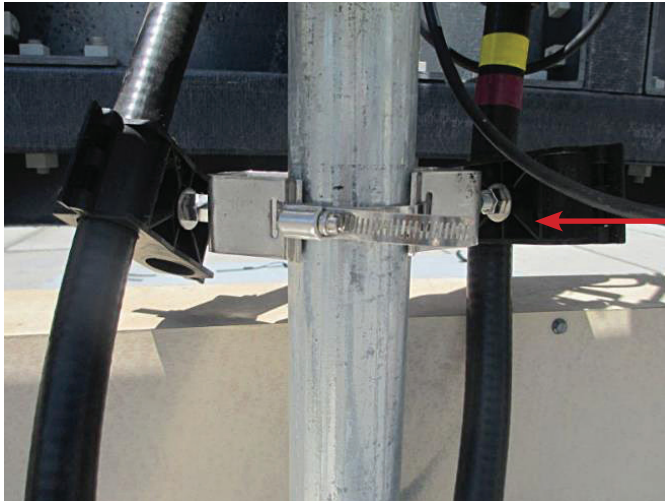

PIM reduced 15 dB by tightening hardware below the antenna

In other cases, more complex repairs might be required that cannot be resolved in a single visit. A typical example might be unseen metal-to-metal contacts below the roofing material surface that need repair. In these situations, it is desirable to clearly document the areas of concern and deploy temporary “fixes” to determine the performance benefits that could be gained by a permanent repair. Temporary fixes in use today include deploying PIM Blankets or RF absorbing foam over the PIM sources identified during the PIM hunt. PIM Blankets are available from manufactures such as ConcealFab Corp. (www.concealfab.com) and RF absorbing foam is available from manufactures such as Cuming Microwave (www.cumingmicrowave.com).




PIM Blankets Deployed over Large Area Generating PIM



RF Absorber Placed over Small Area Generating PIM

The PIM analyzer serves multiple purposes in the external PIM identification and remediation process. It first acts as the high power signal source enabling the PIM Hunter to precisely identify external PIM locations. It also performs the pass / fail measurement necessary to document whether or not fixes, both permanent as well as temporary, will meet system requirements.

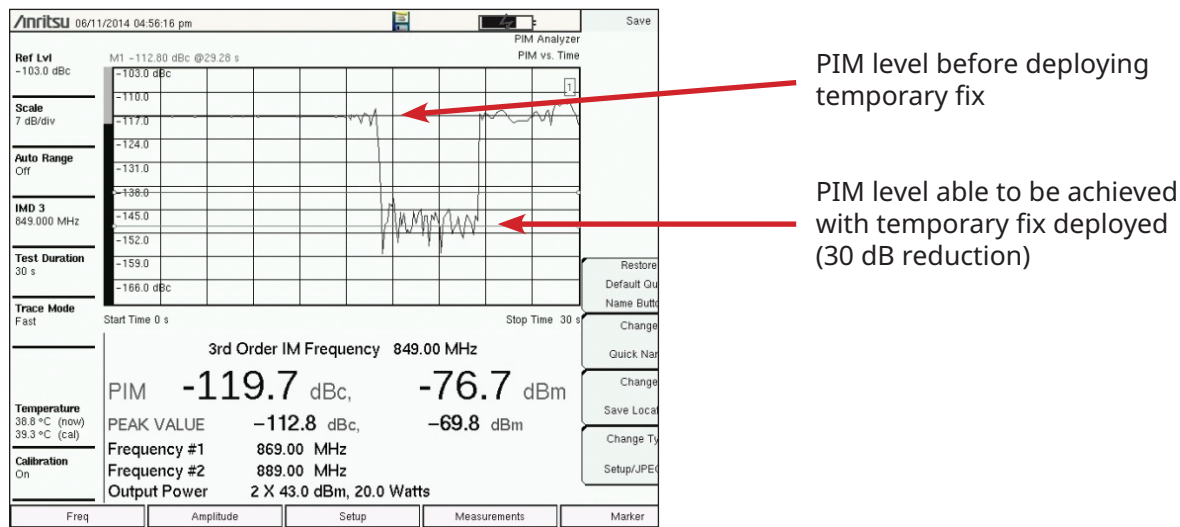

Conclusion:

Identifying the location of external PIM sources has been an extremely difficult problem for mobile operators worldwide. With Anritsu's PIM Hunter™, PIM Master™, Field Master™, and Spectrum Master™ products, operators finally have the tool set required to precisely identify external PIM sources. Once identified, a variety of PIM mitigation techniques can be deployed to reduce PIM levels and improve system performance.



Specifications are subject to change without notice.

• **United States**

Anritsu Americas Sales Company

450 Century Parkway, Suite 190, Allen, TX 75013 U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• **Canada**

Anritsu Electronics Ltd.

Americas Sales and Support

450 Century Parkway, Suite 190, Allen, TX 75013 U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• **Brazil**

Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• **Mexico**

Anritsu Company, S.A. de C.V.

Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• **United Kingdom**

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• **France**

Anritsu S.A.

12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• **Germany**

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• **Italy**

Anritsu S.r.l.

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

• **Sweden**

Anritsu AB

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• **Finland**

Anritsu AB

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5.),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• **Denmark**

Anritsu A/S

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• **Spain**

Anritsu EMEA Ltd.

Representation Office in Spain

Paseo de la Castellana, 141. Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• **Austria**

Anritsu EMEA GmbH

Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• **United Arab Emirates**

Anritsu EMEA Ltd.

Anritsu A/S

Office No. 164, Building 17, Dubai Internet City
P. O. Box – 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

• **India**

Anritsu India Private Limited

6th Floor, Indique ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru – 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• **Singapore**

Anritsu Pte. Ltd.

1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre
Singapore 159303
Phone: +65-6282-2400
Fax: +65-6282-2533

• **Vietnam**

Anritsu Company Limited

16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,
Dong Da District, Hanoi, Vietnam
Phone: +84-24-3201-2730

• **P.R. China (Shanghai)**

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A, New Caohejing International
Business Center No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• **P.R. China (Hong Kong)**

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• **Japan**

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• **Korea**

Anritsu Corporation, Ltd.

8F, A TOWER, 20, Gwacheondaero 7-gil, Gwacheon-si,
Gyeonggi-do, 13840, Republic of Korea
Phone: +82-2-6259-7300
Fax: +82-2-6259-7301

• **Australia**

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• **Taiwan**

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20230901



Anritsu utilizes recycled paper and environmentally conscious inks and toner.



® Anritsu All trademarks are registered trademarks of their
respective owners. Data subject to change without notice.
For the most recent specifications visit: www.anritsu.com

11410-00992, Rev. C Printed in United States 2023-11
©2023 Anritsu Company. All Rights Reserved.