

Anritsu Advancing beyond

EcoSyn™ Lite

Microwave Frequency Synthesizer Module

MG36021A

10 MHz to 20 GHz



Introduction

Anritsu introduces a new generation of compact microwave frequency synthesizer module, the EcoSyn Lite MG36021A. With frequency coverage up to 20 GHz, the new EcoSyn Lite module completely redefines the standards for integrated signal generation, setting another new industry benchmark for performance and accuracy. The MG36021A is the culmination of over 60 years of microwave test and measurement equipment development, using the very latest technologies to deliver accuracy and precision previously reserved only for benchtop instruments.

Signal Generator Features

- 10 MHz to 20 GHz coverage
- 0.001 Hz resolution
- 50 μ s frequency switching
- Instrument-grade spectral purity
- Internal OCXO reference
- SCPI and QuickSyn® native commands
- Amplitude control
- Sweep and list modes
- USB & SPI control interface
- Compact size 101.6 mm x 101.6 mm x 20.32 mm (4 x 4 x 0.8 in)

Applications

- Low-cost instrumentation
- LO for converter tests
- Optical clocking
- Mil/Aero embedded solutions

Table of Contents

Definitions.....3

Performance Specifications.....4

General Specifications6

Remote Interface.....8

SPI Interface.....8

Ordering Information.....9

Notes.....9

Definitions

Warranted Performance	All specifications and characteristics apply under the following conditions, unless otherwise stated: <ul style="list-style-type: none">• After 30 minutes of warm-up time, where the instrument is left in the on state.• Over the 25 °C ± 5 °C temperature range.
Typical Performance	Typical specifications describe performance that will be met by a minimum of 80% of all products. They do not include guard bands and are not warranted
Nominal Performance	Represents representative performance not warranted or statistically derived from measurements, but by design
Time Base Error	Input Frequency × Frequency Reference Error
Calibration Cycle	Calibration is within the recommended 24 month period

All specifications in this data sheet are subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com

Performance Specifications

Frequency

Frequency Range ¹	10 MHz to 20 GHz
Frequency Resolution	0.001 Hz
Frequency Stability	± 0.3 ppm
Frequency Accuracy	Reference ±5 ppb
Frequency Switching Time ²	50 µs (triggered list mode) 500 µs (individual SPI commands)
List Mode	64,000 points

Internal Reference


Output Frequency	10 MHz nominal
Output Power	+5 dBm ± 2 dBm
Reference Mute	-60 dBm max
Frequency Temp. Stability	± 0.3 ppm
Aging ³	± 0.5 ppm / year
Locking Range	± 2 ppm
Output Impedance	50 Ω nominal

External Reference

Input Frequency	10 MHz
Input Power	+5 dBm ± 10 dBm
Absolute Max. Input Level	+15 dBm
Input Impedance	50 Ω nominal

Power


Frequency	Output Power
10 MHz to < 50 MHz	+15 dBm
50 MHz to < 3.7 GHz	+20 dBm
3.7 GHz to 20 GHz	+18 dBm
Power Control Range	> 20 dB
Level Accuracy	±1.5 dB
Resolution	±0.5 dB
RF Output On/Off Ratio	> 60 dB min, > 75 dB typical
Output Return Loss	10 dB nominal

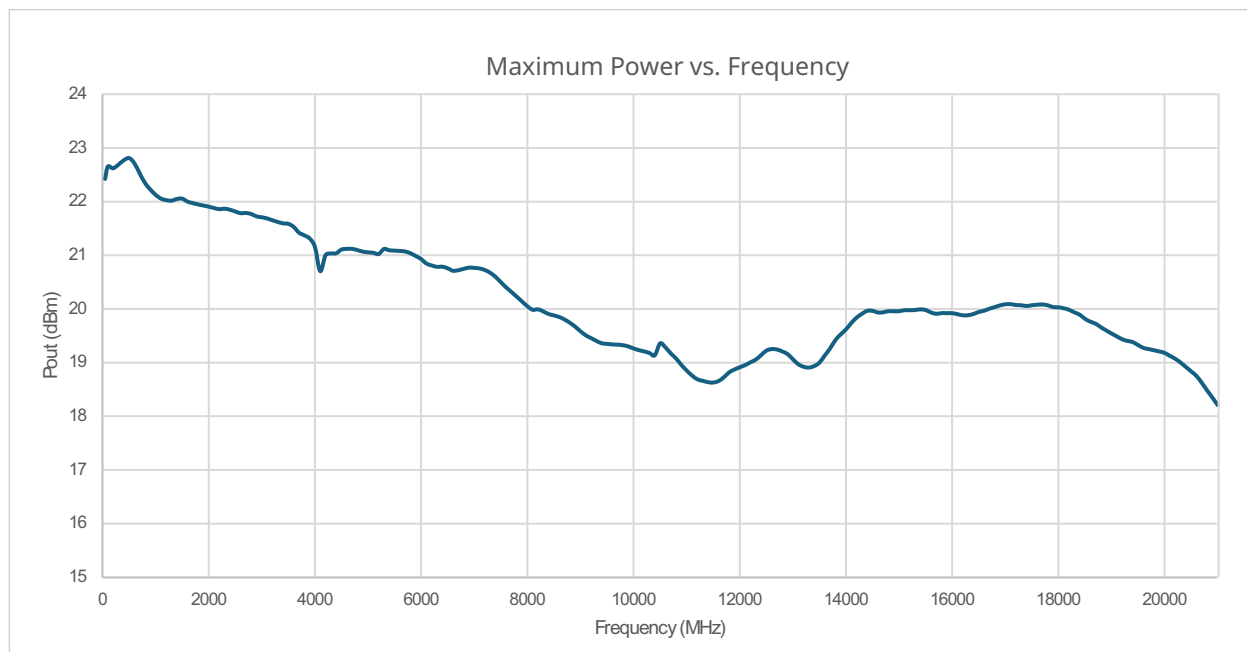

Spectral Purity (Measured at +10 dBm)

Harmonics -10 dBc nominal
Non-Harmonic Spurious -60 dBc max


Phase Noise (dBc/Hz)	0.1 GHz		1 GHz		5 GHz		10 GHz		20 GHz	
	typ	max	typ	max	typ	max	typ	max	typ	max
100 Hz	-134	-131	-116	-113	-101	-98	-95	-92	-89	-86
1 kHz	-142	-139	-137	-134	-124	-121	-118	-115	-112	-109
10 kHz	-151	-148	-143	-140	-132	-129	-126	-123	-120	-117
100 kHz	-156	-153	-144	-141	-134	-131	-128	-125	-121	-118
1 MHz	-156	-153	-142	-139	-132	-129	-126	-123	-120	-117
10 MHz	-158	-155	-151	-148	-145	-142	-139	-136	-133	-130

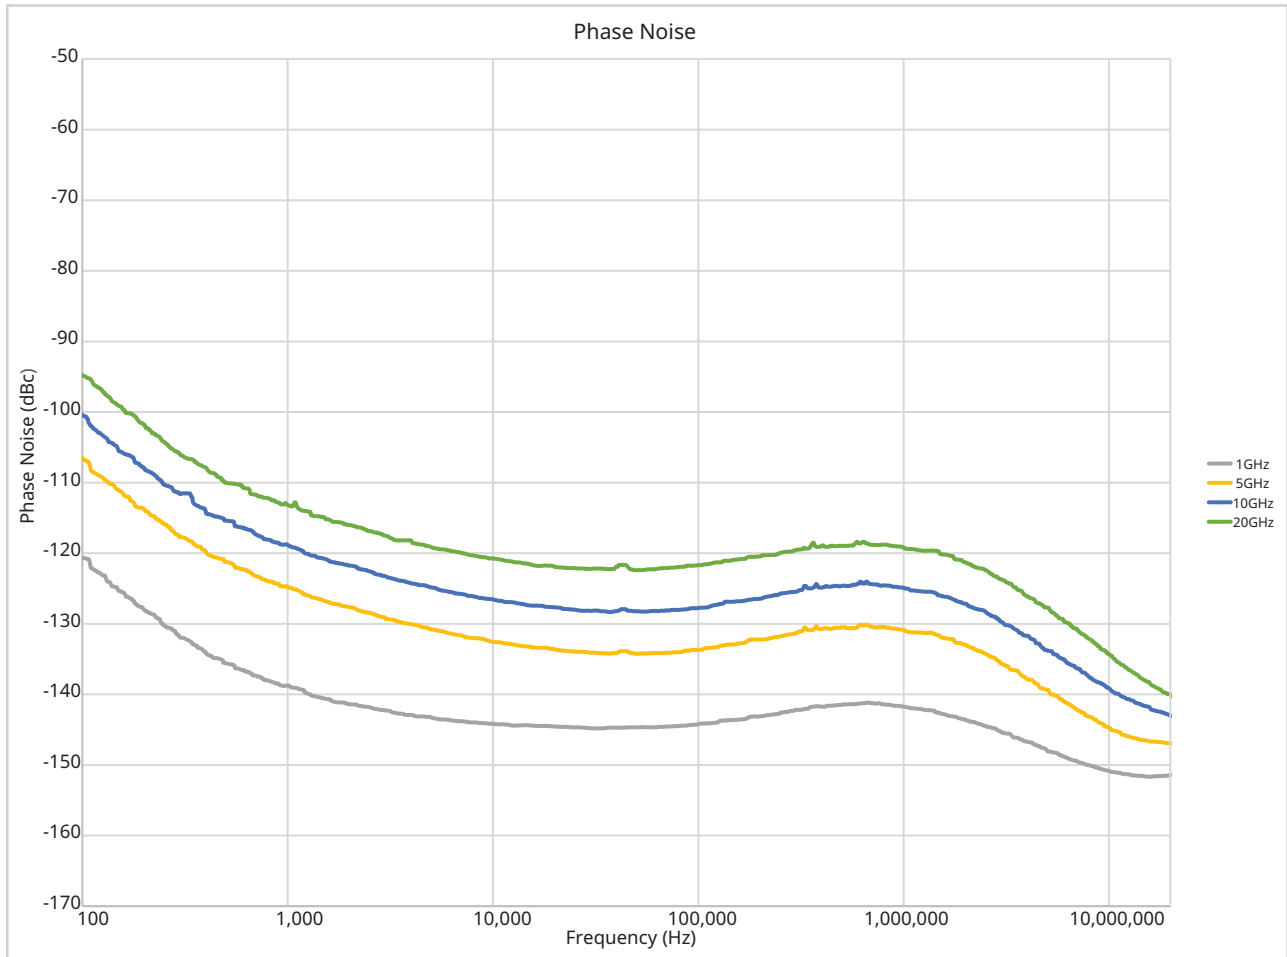

General Specifications

Connectors		
	RF OUT	SMA(f)
	REF OUT	SMA(f)
	REF IN	SMA(f)
	SPI	14 pin, 1.27 mm spaced double-row header ⁵ (See “ SPI Interface ” on page 8)
	USB	USB-C receptacle (USB 2.0). Provides access to serial communication, utilized for firmware updates and remote interfaces.
	12 V OUT	2 pin header. Provides power for external 12 V fan. 500 mA max.
Electrical		
	Supply Voltage	+12 VDC $\pm$ 5%
	Absolute Max. Supply Voltage	+15 VDC
	Power Consumption	15 W nominal
Environmental		
		MIL-PRF-28800F Class 2/3
	Temperature Range ⁴	0 °C to +50 °C (operating) -40 °C to +70 °C (non-operating)
	Warm-up Time	30 minutes
Regulatory Compliance		
	European Union	EMC 2014/30/EU, EN 61326-1:2013, CISPR-11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU & 2015/683
	United Kingdom	EMC SI 2016/1091; BS EN 55011 & BS EN 61000-4-2/3/4/5/6/8/11 Consumer Protection (Safety) SI 2016/1f; BS EN 61010-1:2010 Environmental Protection SI 2012/3032; 2011/65/EU & 2015/863
	Australia and New Zealand	RCM AS/NZS 4417:2012
	South Korea	R-R-A2J-1017
	Canada	ICES-1(A)/NMB-1(A)
Warranty		
	Duration	One-year warranty

Size	101.6 mm x 101.6 mm x 20.32 mm
Weight	0.38 kg (0.84 lb)




Remote Interface

Functionality	Full instrument programming control (except power on/off)
Programming Language	Standard Commands for Programmable Instruments (SCPI), QuickSyn® Native Commands
Interfaces	14-pin SPI header


SPI Interface

SPI Clock Timing The SPI clock schemes.

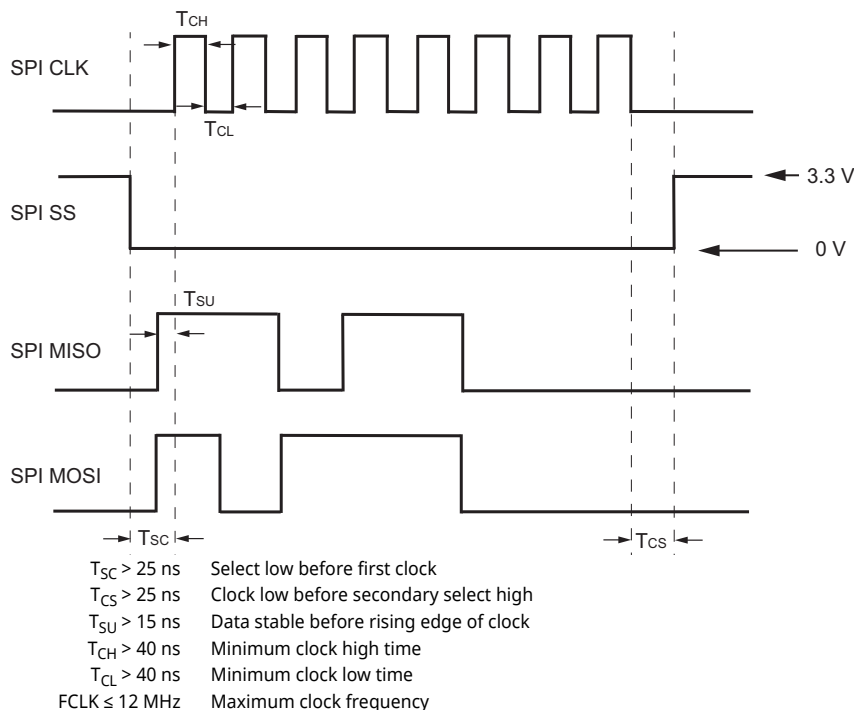

SPI Pin-Out

Signal	Pin	Description
PWR_+12V	Pin 1, 2	External +12 VDC Supply.
N/C	Pin 3, 4	Not connected.
SPI_CLK	Pin 5	SPI clock. Supplied by the controlling computer (not the synthesizer). The controlling computer is the SPI primary; the synthesizer is the SPI secondary.
SPI_SS	Pin 6	SPI Secondary Select. This signal is an active low input to the synthesizer. It frames command communications. For each command, SPI_SS goes low before the first bit is sent and goes high after the last bit is sent.
LOCK	Pin 7	Output indicates the synthesizer is locked on its current setting (+3.3 V locked, 0 V unlocked).
SPI_MISO	Pin 8	Primary In/Secondary Out. Status and other returned information from the synthesizer to the controlling computer.
REF LOCK	Pin 9	Output indicates the synthesizer has detected an external or internal reference signal and locked on that signal (+3.3 V locked, 0 V unlocked).
SPI_MOSI	Pin 10	Primary Out/Secondary In command data from the controlling computer to the synthesizer.
GND	Pin 11	Ground
TRIGGER	Pin 12	Rising edge active input. When enabled, the trigger signal of +3.3 V can initiate frequency change or step through lists or sweeps.
RESET	Pin 13	Internally pulled-up with 100 kΩ resistor. Active "LOW" signal will reset the synthesizer to a default state.
GND	Pin 14	Ground



Ordering Information

Part Number	Description
MG36021A	EcoSyn Lite, Frequency Range 10 MHz to 20 GHz


Standard Accessories

Accessory	Description	Accessory	Description
	2100-43-R Development Cable		40-187-R AC/DC Power Supply, 1m, 12V, Output Cable
	2000-1859-R USB Cable, USB 3.0 Type-A to Type-C, 1 m		

MG36021A Options

Part Number	Description
MG36021A-0098	Standard Calibration to ISO17025 and ANSI/NCSL Z540-1, includes calibration certificate

Optional Accessories

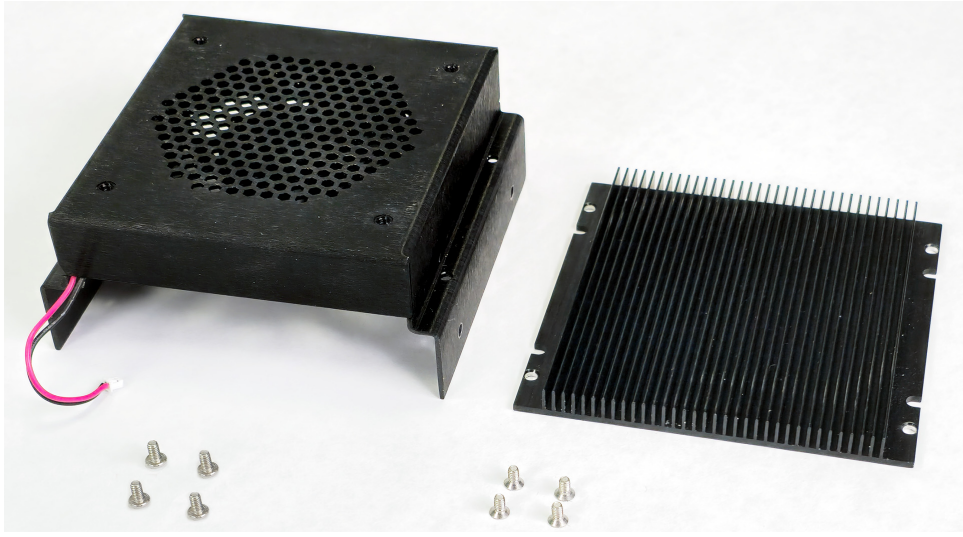Accessory	Description
	2000-2180-R Cooling Assembly Kit

Notes

1. Tested to 21.7 GHz
2. Full band step to ± 5 ppm of final frequency
3. Calibration command is available
4. Adequate heat sinking must be provided in order to prevent permanent damage
5. Anritsu recommends Samtec manufactured mating socket assembly 07-28-G-03.25-DL-NDX series

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com and search for training and education.



• United States

Anritsu Americas Sales Company

490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Canada

Anritsu Electronics Ltd.

Americas Sales and Support

490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• Brazil

Anritsu Elettronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Blvd Miguel de Cervantes Saavedra #169 Piso 1,
Col. Granada, Mexico, Ciudad de Mexico,
11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom

Anritsu EMEA Limited

200 Capability Green,
Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu SA

12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.R.L.

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

• Sweden

Anritsu AB

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• Finland

Anritsu AB

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5.),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• Denmark

Anritsu A/S

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Spain

Anritsu EMEA Ltd.

Representation Office in Spain

Paseo de la Castellana, 141.
Planta 5, Edificio Cuzco IV
28046, Madrid, Spain
Phone: +34-91-572-6761

• Austria

Anritsu Pty Ltd

Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• United Arab Emirates

Anritsu EMEA Ltd.

Anritsu A/S

Office No. 164, Building 17, Dubai Internet City
P. O. Box - 501901, Dubai, United Arab Emirates
Phone: +971-4-3758479

• India

ANRITSU INDIA PRIVATE LIMITED

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road,
Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore

ANRITSU PTE LTD

1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre
Singapore 159303
Phone: +65-6282-2400
Fax: +65-6282-2533

• Vietnam

ANRITSU COMPANY LIMITED

16th Floor, Peakview Tower, 36 Hoang Cau Street,
O Cho Dua Ward, Dong Da District, Hanoi, Vietnam
Phone: +84-24-3201-2730

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A, New Caohejing
International Business Center No. 391 Gui Ping Road
Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

ANRITSU COMPANY LIMITED

Unit 1302, 13th Floor, New East Ocean Center,
No.9 Science Museum Road, TsimShaTsui East,
Kowloon, Hong Kong
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• South Korea

Anritsu Corporation, Limited

8F, A TOWER, 20, Gwacheondaero 7-gil, Gwacheon-si,
Gyeonggi-do, 13840, Republic of Korea
Phone: +82-2-6259-7300
Fax: +82-2-6259-7301

• Australia

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

ANRITSU COMPANY, INC.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20241028