

How to Install Anritsu PowerXpert™ in Signal Analyzer MS2830A

Signal Analyzer MS2830A

Contents

1	What is Anritsu Power Xpert™?	2
2	How to Install in MS2830A	3
3	Usage Precautions	7
4	Reference Materials	8

1 What is Anritsu PowerXpert™?

Anritsu PowerXpert™ is PC application software required when connecting the Anritsu USB Power Sensor to a PC. It can also be installed in the Signal Analyzer MS2830A.

Anritsu PowerXpert™ for the MS2830A can be downloaded from the MS2830A website. When using it with a PC, download the latest version from the Anritsu website for the USB Power Sensor.


In addition, the MS2830A has a built-in Power Meter function as a standard feature. It can be used to measure power and relative power by connecting a specified USB power sensor. Installing the Anritsu PowerXpert™ PC application software for the Anritsu USB Power Sensor in the MS2830A supports various measurement functions offered by Anritsu PowerXpert™, as well as use of other USB power sensors by the MS2830A. However, Anritsu PowerXpert™ does not support remote control, and a mouse is required for operation.

■ Obtaining Anritsu PowerXpert™ for MS2830A

Download from MS2830A website

(The website design and content may be slightly different from that shown below.)


Method: Click [DOWNLOADS] at top left of MS2830A website and click link in [Drivers/Firmware/Software] tab.

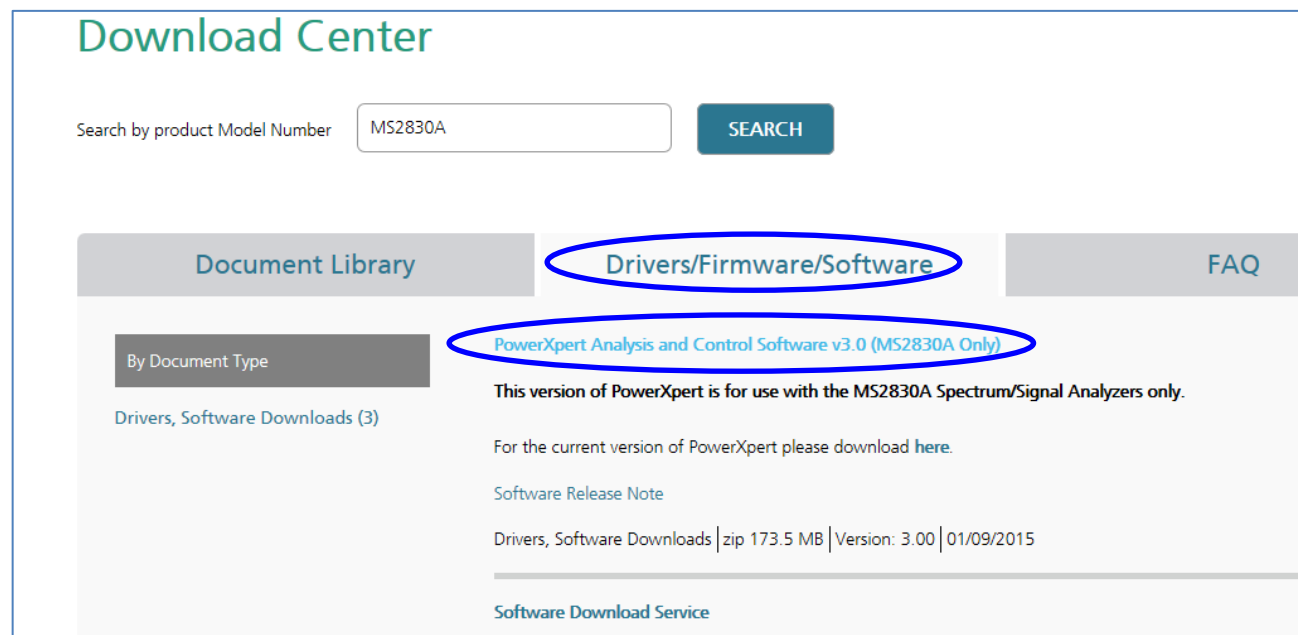

2 How to Install in MS2830A

1. Download Anritsu PowerXpert™ to the PC from the Anritsu MS2830A website.

<Downloaded .zip file>



2. Double-click the downloaded .zip file at the PC to expand the file. Next, copy the file [PowerXpert_*.*_Full.exe] in the displayed expanded folder to the MS2830A desktop. (*.* indicates the file version number.)

<Example of expanded folder>


Name	Size	Type	Date Modified
PowerXpert Software Release Note V3.0	42 KB	Wordpad Document	7/17/2015 10:33 AM
PowerXpert_3.0_Full	114,875 KB	Ap	7/17/2015 10:35 AM
PowerXpert_3.0_Minimal	66,464 KB	Application	7/17/2015 10:35 AM

*Refer to item 4 for the method of displaying the MS2830A desktop.

PowerXpert_.*)_Minimal.exe is for PCs connected to the internet and cannot be used by the MS2830A.

*Version 3.0 cannot be used with the Japanese version of Windows (some buttons are not displayed due to a bug). The MS2830A runs the English version of Windows so it is unaffected by this bug. When using on a PC, download the latest version from the Anritsu USB Power Sensor website.

<Copying to MS2830A desktop>




*It is best to use a USB memory stick when copying files to the MS2830A. Refer to section 4 if not using a USB memory stick.

3. Double-click PowerXpert_*.*)_FULL.exe copied to the MS2830A desktop. (*.*)_ indicates the version number.)


4. When the install wizard is displayed, click [Next] to start the install.



5. Read the EULA, click the radio button to the left of [I accept the terms of the license agreement], and click [Next].

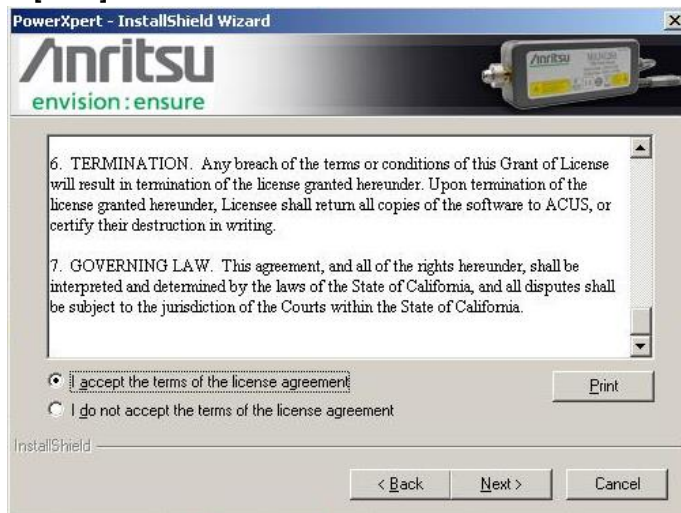


6. To create a shortcut on the desktop, put a checkmark in the checkbox to the left of [Desktop Icon] and click [Next].

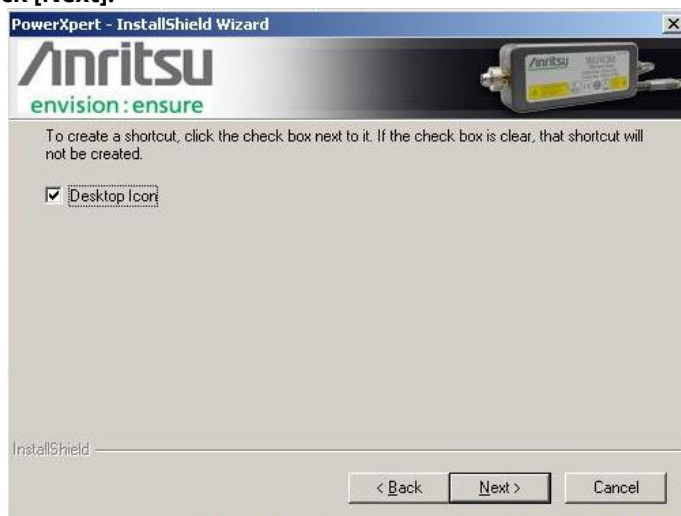


<Shortcut icon>



7. When specifying the installation folder, click [Browse], specify the directory, and click [Next]. The default installation directory is C:\Program Files\Anritsu\PowerXpert

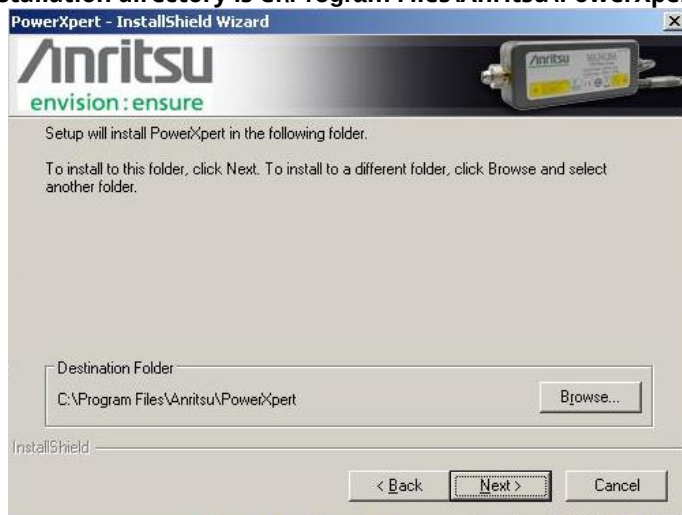


8. Click [Install].

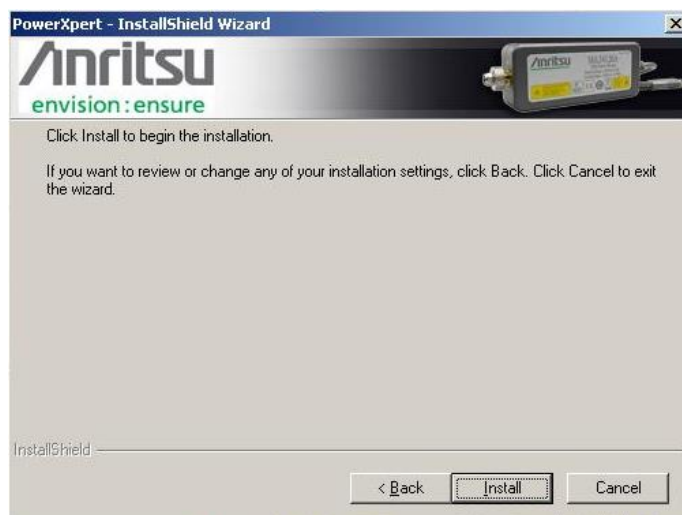

9. When installation is finished, click [Finish].



10. Click the [Shut Down] button at the Start menu to power-down the MS2830A.

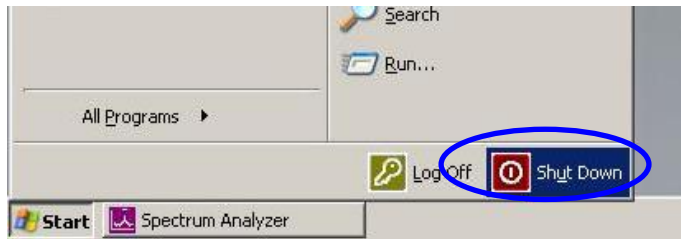

11. To use Anritsu PowerXpert™ after starting the MS2830A, either click the desktop shortcut icon created in step 6 or click the Start menu at the bottom right of the screen and select [All Programs] → [Anritsu] → [PowerXpert] (or select the directory specified in step 7).

<Desktop Shortcut Icon>



<Selection from Start menu>




3 Usage Precautions

When using Anritsu PowerXpert™ on the MS2830A, be sure to unload (quit) the MS2830A Power Meter function first. If this is not done, the operation of Anritsu PowerXpert™ will be unstable at connection of the USB power sensor. Additionally, unload (quit) as many applications as possible other than the Power Meter function.

■Unloading (Quitting) Power Meter Function

1. After pressing the MS2830A [System Config] button, press [F4] (Application Switch Settings) to display the Application Switch Registration screen.
2. Press [F2] (Unload Application Select) and use the cursor keys to select the application to unload (quit) (Power Meter in this case) from the Loaded Applications displayed at the top of the screen; press [F7] (Set).

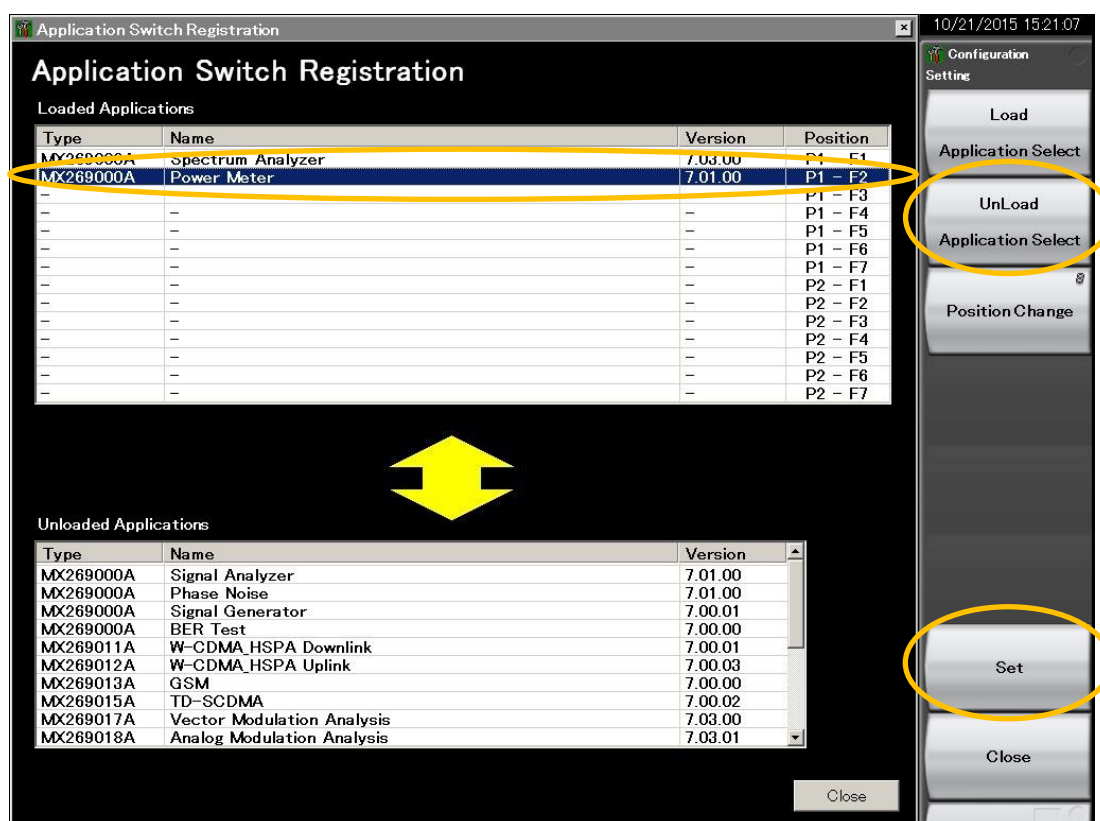


To use the Power Meter function once again, press [F1] (Load Application Select) at the same screen and use the cursor key to select the application to load (start) (Power Meter in this case) from the applications displayed in Unloaded Applications at the bottom of the screen; press [F7] (Set).

4 Reference Materials

■MS2830A Desktop Display Method

1. Right-click the mouse anywhere on the MS2830A screen.
2. Left-click [Show the Desktop] in the displayed menu to display the desktop.

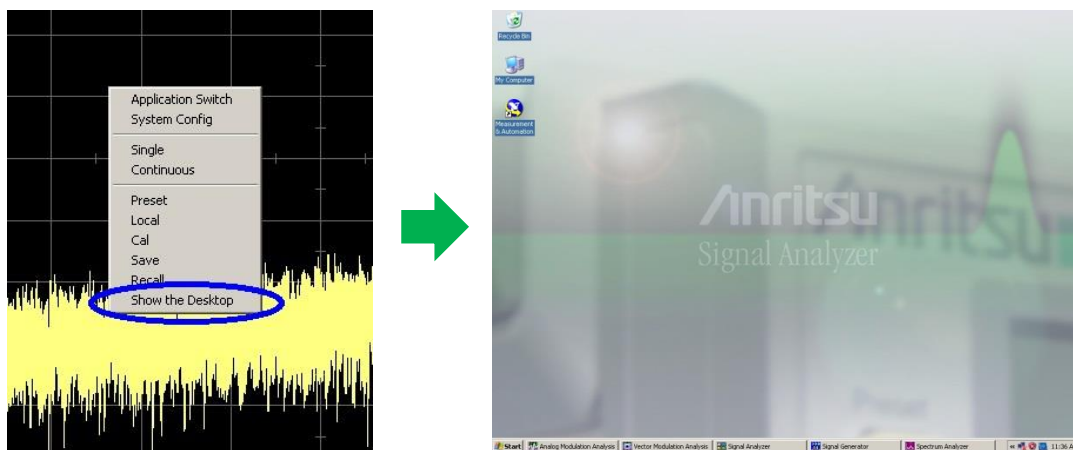

■Copying file to desktop without using USB memory stick

Use a USB CD or DVD drive connected to the MS2830A USB port to copy the file saved to a CD-R or DVD-R disk to the MS2830A desktop.

• United States

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

• Sweden

Anritsu AB

Kistagången 20B, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.

Representation Office in Spain

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 8
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8359

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoeyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817