

CMA 3000

SPECIFICATIONS

Tandem Connection Monitoring (TCM) Option



Powerful tool for testing SDH and PDH systems

When equipped with the SDH test option, the CMA 3000 is an easy-to-use, powerful tool for testing SDH and PDH systems.

CMA 3000 spans across a wide range of applications, from fast first aid troubleshooting to comprehensive, in-depth and all-layer analysis of transmission problems.

It's possible to further test SDH systems by adding the Tandem Connection Monitoring (TCM) option to a CMA 3000 with SDH option installed. The TCM option contains very powerful features for testing and monitoring TCM systems in SDH networks.

Key Features	Key Applications
<ul style="list-style-type: none"> • Simultaneous bi-directional monitoring of TCM information on SDH lines • TCM overhead byte testing and monitoring • Comprehensive TCM error and alarm statistics 	<ul style="list-style-type: none"> • Comprehensive out-of-service test of TCM systems for: <ul style="list-style-type: none"> ○ Installation ○ Provisioning • In-service monitoring of TCM systems for: <ul style="list-style-type: none"> ○ Fast troubleshooting ○ TCM overhead byte analysis ○ In-service error-performance measurement

An SDH system has a number of error detection mechanisms, supporting end-to-end monitoring or section-based monitoring. Today operators may transport SDH traffic through a second operator's networks. Therefore a new system has been added to the original error detection mechanisms of SDH, this being the Tandem Connection Monitoring.

The system is based on in-service error detection of SDH Virtual Containers. By checking the Virtual Containers for errors upon entering the second operator's network and leaving it again you can supervise the transmission quality throughout the second operator's networks.

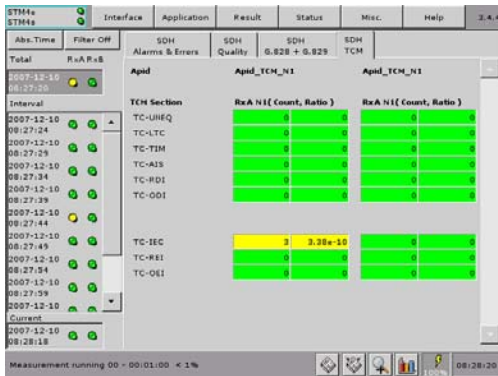


Fig. 1 Result screen with comprehensive statistics on TCM events.

As CMA 3000 can be outfitted to support bi-directional in-service monitoring you can inspect TCM parameters for both sides of a line simultaneously. This allows you to analyze the overall transmission quality of the monitored part of the line in the fastest way possible.

For out-of service testing and verification of the TCM system CMA 3000 includes features to inject the various conditions that provoke TCM events.

Specifications

The specifications below list the functionality when adding the TCM option to the basic CMA 3000.

For further information on the basic functionality please refer to the CMA 3000 basic instrument specifications sheet.

General	
TCM frame format	ITU-T G 783, G 707 annex D (TCM option 2) and annex E
POH bytes	N1 (VC-4, VC-3) N2 (VC-12)
TCM Access Point Identifier (Apid)	15 bytes ASCII sequence, CRC-7
Alarms	Alarms can be detected and inserted: <ul style="list-style-type: none">• TC-LTC, TC-TIM, TC-UNEQ, TC-AIS, TC-RDI, TC-ODI Alarm insertion is manual on/off
Errors	Errors can be detected and inserted: <ul style="list-style-type: none">• B3 (VC-4, VC-3), TC-IEC (VC-4, VC-3), V5 (VC-12), TC-REI, TC-OEI Error insertion: <ul style="list-style-type: none">• Manual: 1-8000 consecutive errors• Continuous 10-5, 10-6, 10-7, 10-8, 10-9, 10-10

Results	
Status	Current information on TCM alarms and errors on the monitored line
Statistics	User-defined resolution: <ul style="list-style-type: none">• 1, 2, 5, 10, 15, 30s, 1, 5, 15, 30 min, 1, 2, 4, 6, 12 hours Information logged on TCM alarms and errors

Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

• U.S.A.

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 – Bela Vista - São Paulo - SP - Brasil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

• France

Anritsu S.A.

12 avenue du Québec, Batiment Iris 1-Silic 612
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-5

• Italy

Anritsu S.r.l.

Via Elio Vittorini, 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

• Sweden

Anritsu AB

Borgarfjordsgatan 13A, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

(Service Assurance)

Anritsu AB Denmark

(Test & Measurement except Service Assurance)
Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-72112200
Fax: +45-72112210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

PO Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu Pte. Ltd.

India Branch Office

3rd Floor, Shri Lakshminarayana Niwas, #2726, 80 ft Road,
HAL 3rd Stage, Bangalore - 560 075, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong
Phone: +852-2301-4980
Fax: +852-2301-3545

• P.R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 2008, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 10004, P.R. China
Phone: +86-10-6590-9230
Fax: +86-10-6590-9235

• Korea

Anritsu Corporation, Ltd.

8F Hyunjuk Building, 832-41, Yeoksam Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

• Australia

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168 Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817