Anritsu

Electronic Measuring Instruments

α Peripheral Equipment

Coaxial Cords, Adapters
Power Cord Plugs
F-Series Cabinets

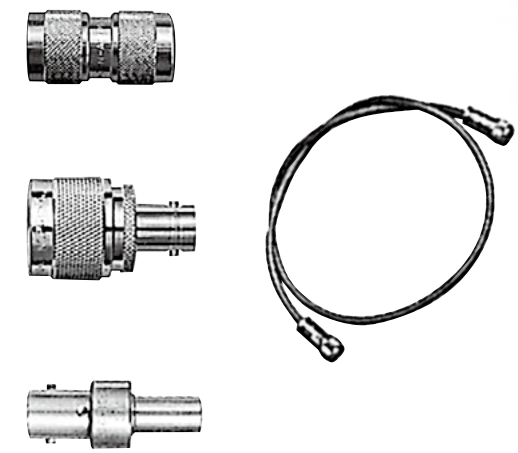

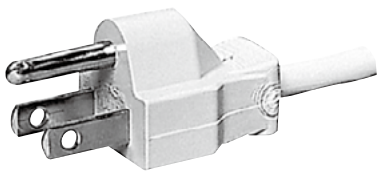

Contents

Coaxial Cords, Adapters 3
Power Cord Plugs 4
Accessories for F-Series Cabinets 5

Coaxial Cords, Adapters

List of Principal Coaxial Cables

Coaxial Cable	Characteristic Impedance	Nominal Attenuation (10 MHz)	Nominal Capacitance	Finished Diameter	Mass (g/m)	Remarks
3C-2V	75 ±3Ω (10 MHz)	0.042 dB/m	67 pF/m	5.8 mm	48	Single outer conductor, PVC covered
3C-2W				6.5 mm	75	Double outer conductor, PVC covered
3C-2Z				3.8 mm	28	Single outer conductor, No PVC covered
3C-2T		(0.013 dB/m, 1 MHz)		7.4 mm	110	Triple outer conductor, PVC covered
3C-2WS	75 ±1Ω (10 MHz)	0.048 dB/m		6.6 mm	76	Double outer conductor, PVC covered
5C-2V	75 ±3Ω (10 MHz)	0.027 dB/m		7.8 mm	75	Single outer conductor, PVC covered
5C-2W				8.5 mm	110	Double outer conductor, PVC covered
5C-2Z				5.8 mm	48	Single outer conductor, No PVC covered
3D-2W	50 ±2Ω (10 MHz)	0.047 dB/m	100 pF/m	6.4 mm	75	Double outer conductor, PVC covered
5D-2V		0.031 dB/m		7.5 mm	85	Single outer conductor, PVC covered
5D-2W				8.2 mm	120	Double outer conductor, PVC covered
RG-55/U	53.5 ±2.5Ω (4 MHz)	0.0328 dB/m	93.5 pF/m	5.25 mm	55	Double outer conductor, PE covered
RG-58/U				4.95 mm	50	Single outer conductor, PVC covered
RG-58A/U	50 ±2Ω (10 MHz)	0.0427 dB/m				

Connecting Cords

J0576B/D

Coaxial cord: 1 m (J0576B)
2 m (J0576D)
N-P · 5D-2W · N-P
Impedance: 50Ω

J0133A

Coaxial cord: 1 m (J0133A)
3CA-P2 · RG-58A/U · 3CA-P2
Impedance: 50Ω

J0025A

Coaxial cord: 1 m (J0025A)
S-5DWP · 5D-2W · S-5DWP
Impedance: 50Ω

Conversion Connectors

J0038

Coaxial adapter
N-P · N-P
Impedance: 50Ω

J0039

Coaxial adapter
N-J · N-J
Impedance: 50Ω

J0040



Coaxial adapter
N-P · BNC-J
Impedance: 50Ω

J0044

Coaxial adapter
N-J · BNC-J
Impedance: 50Ω

J0043

Coaxial adapter
N-J · BNC-P
Impedance: 50Ω

J0055

Coaxial adapter
NC-P · BNC-J
Impedance: 75Ω

J0052

Coaxial adapter
SP-3CP · 3C-J (BNC-J)
Impedance: 75Ω
RoHS non-compliant

Power Cord Plugs

Power Cord Plugs for Export

Plug Type	A2	B4	C7	P4	S3
Safety Standard Compliance	UL, CSA	BS	VDE, OVE, KEMA, SEMKO, NEMKO, FIMCO, DEMCO, CEBEC	—	SAA
Rating	125 V	250 V	250 V	250 V	250 V
Shape*					
Main Countries/ Regions	U.S.A. Canada Taiwan	U.K. Singapore Malaysia Hong Kong South Africa	Europe Korea	India Sri Lanka	Australia New Zealand China

The supplied accessory power cord depends on the national specifications and instrument rating.
Contact Anritsu when ordering extra cords.

*: This table shows the plug shape, but the actual power cord may be different from that shown.

Accessories for F-Series Cabinets

Anritsu's F-series cabinet was designed using basic dimensions that conform to EIA and IEC racking specifications, permitting compatible equipment to be easily stacked up to form a system, or to be mounted on the EIA/IEC standard rack.
The accessories of the F-series cabinet are easy to mount and use, and blend with the design of the cabinet. The F-series can be identified by its green feet.

Protective Cover

Protects front of cabinet

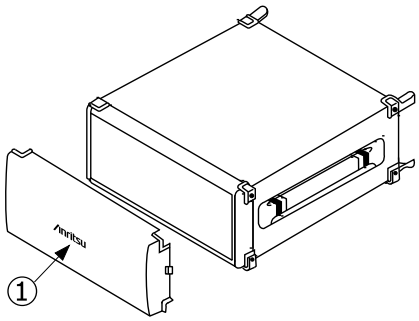

No.	Description	Quantity
①	Protective cover	1

Item	Order No.
Protective cover 3/4MW4U	B0329G
Protective cover 1/2MW2U	B0329L

Coupler

To mount two or more F-series cabinets in a stack

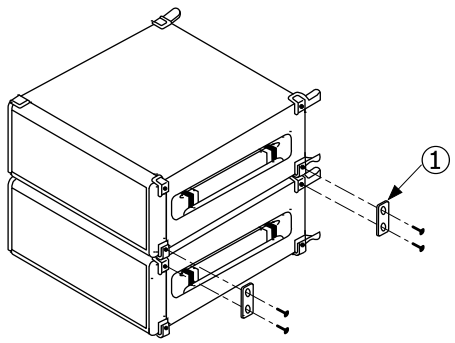

No.	Description	Quantity
①	Coupler	4

Item	Order No.
Coupler	B0332*

*: B0332 is not RoHS ((EU) 2015/863) compliant.

Symbol and Dimensions of F-series Cabinet

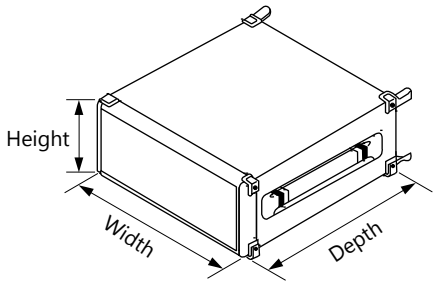

Width

Symbol	Dimension (mm)
1MW	426
3/4MW	320
2/3MW	284
1/2MW	213

Height

Symbol	Dimension (mm)
2U	88
3U	132.5
4U	177
5U	221.5
6U	266

Depth

Symbol	Dimension (mm)
250D	251
350D	351
450D	451

Note: Knobs, handles, and feet are not included in cabinet external dimensions.

Anritsu Advancing beyond

Specifications are subject to change without notice.

• **United States**
Anritsu Americas Sales Company
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: (408)-778-2000

• **Canada**
Anritsu Electronics Ltd.
Americas Sales and Support
490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.
Phone: +1-800-Anritsu (1-800-267-4878)

• **Brazil**
Anritsu Eletrônica Ltda.
Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP, Brazil
Phone: +55-11-3283-2511

• **Mexico**
Anritsu Company, S.A. de C.V.
Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• **United Kingdom**
Anritsu EMEA Limited
900 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200

• **France**
Anritsu SA
12 avenue du Québec, Immeuble Goyave,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50

• **Germany**
Anritsu GmbH
Nemetschek Haus, Konrad-Zuse-Platz 1,
81829 München, Germany
Phone: +49-89-442308-0

• **Italy**
Anritsu S.R.L.
Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy
Phone: +39-6-509-9711

• **Sweden**
Anritsu AB
Kistagången 20 B, 2 tr, 164 40 Kista, Sweden
Phone: +46-8-534-707-00

• **Finland**
Anritsu AB
Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5.),
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100

• **Denmark**
Anritsu A/S
c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• **Spain**
Anritsu EMEA GmbH
Representation Office in Spain
Calle Manzanares 4, Primera planta, 28005 Madrid, Spain
Phone: +34-91-572-6761

• **Austria**
Anritsu EMEA GmbH
Am Belvedere 10, A-1100 Vienna, Austria
Phone: +43-(0)1-717-28-710

• **United Arab Emirates**
Anritsu A/S
Office No. 164, Building 17, Dubai Internet City
P. O. Box – 501901, Dubai, United Arab Emirates
Phone: +971 (0) 4-2424919

• **India**
ANRITSU INDIA PRIVATE LIMITED
6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru – 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• **Singapore**
ANRITSU PTE LTD
1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre
Singapore 159303
Phone: +65-6282-2400

• **Vietnam**
ANRITSU COMPANY LIMITED
16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,
Hanoi, Vietnam
Phone: +84-24-3201-2730
Fax: +84-24-3201-2740

• **P.R. China (Shanghai)**
Anritsu (China) Co., Ltd.
Room 2301-2303, Tower A, New Caohejing International Business
Center No. 391 Gui Ping Road, Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898

• **P.R. China (Hong Kong)**
ANRITSU COMPANY LIMITED
Unit 1302, 13th Floor, New East Ocean Center,
No.9 Science Museum Road, TsimShaTsui East,
Kowloon, Hong Kong
Phone: +852-2301-4980

• **Japan**
ANRITSU CORPORATION
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-1244
Fax: +81-46-296-1239

• **Korea**
Anritsu Corporation Limited
8F, A TOWER, 20, Gwacheondaero 7-gil, Gwacheon-si,
Gyeonggi-do, 13840, Republic of Korea
Phone: +82-2-6259-7300

• **Australia**
Anritsu Pty Ltd
Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177

• **Taiwan**
ANRITSU COMPANY, INC.
7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816

2512

Printed in Japan 09/DEC/2025 ddcm Catalog No. Peripheral-E-A-1-(1.03)