

# MA8120E

Shield Box

# MA8120E Shield Box Product Introduction

Ver. 1.00  
September 2006

Anritsu Corporation



Discover What's Possible™  
MA8120E-E-L-2

Slide 1

Anritsu

## Introduction

The rapid growth and diversity of today's wireless communication market requires more testing of wireless equipment during the development phase.

However, even open-air field tests sometimes do not give reliable results due to the impact of interference waveforms, live networks, nearby electrical equipment, or even the effects of the measurement system itself, etc. Cable connections might not be possible or there may be no RF connector. And antenna tests require connecting an antenna under near-to-live conditions that can be difficult to achieve.


The Anritsu MA8120E Shield Box solves these problems by providing a stable measurement environment via air or cable connection while shutting out external interference.

Discover What's Possible™  
MA8120E-E-L-2

Slide 2

Anritsu

## Shield Box Part Names

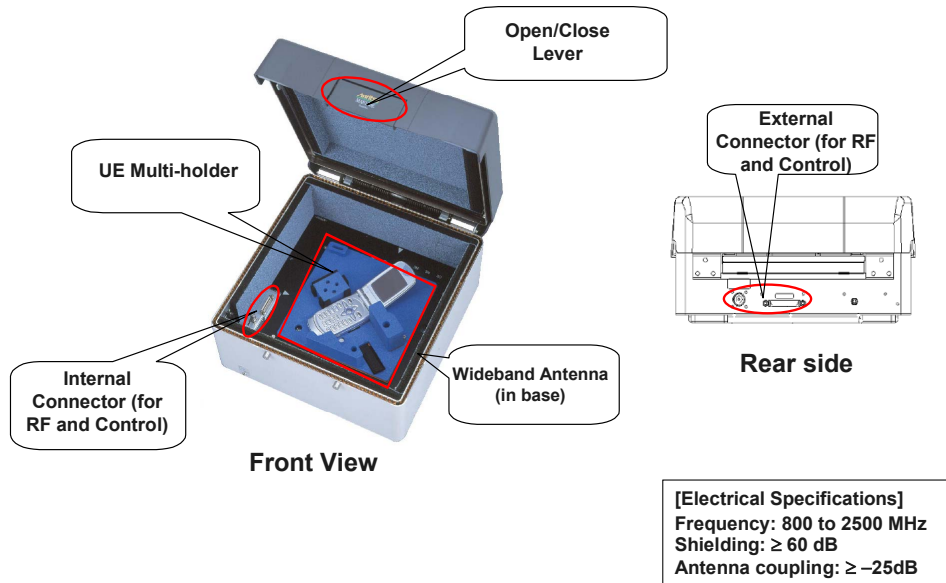

Discover What's Possible™  
MA8120E-E-L-2

Slide 3

Anritsu

## Key Features

The MA8120E Shield Box features:

- **Mounts all major mobile phone mobiles**
- **Easy reproducible positioning**
- **Ideal air connections**
- **Integrated wideband antenna supporting major communication systems**
- **Feed-through USB and RS-232C control lines**
- **Simple one-handed operation**
- **Large capacity and no protrusions**
- **Compatible with MT8510B Service Tester**

The MA8120E Shield Box is ideal for testing software applications and signalling of equipment with integrated radio communication modules, such as Bluetooth and Wireless LAN.


Discover What's Possible™  
MA8120E-E-L-2

Slide 4

Anritsu

## Mounts All Major Mobile Phone Models


The Multi-holder can hold the various major mobile models, including common designs like clamshell and straight, and uncommon designs like leaf and portable game console.




Leaf




Clamshell



Straight



Portable game console

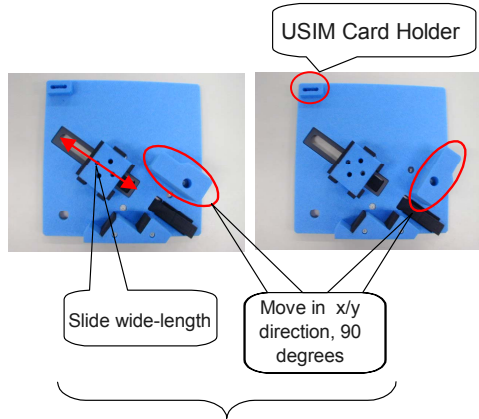

UE Multi-holder holds all major mobile models

Discover What's Possible™  
MA8120E-E-L-2


Slide 5

Anritsu

## Easy Reproducible Positioning

By positioning the letter coordinate on the bottom to fit to the positioning hole in the holder, any user can easily place the mobile in the same position to avoid placement errors.

e.g. Position: **4D**, x/y Direction: **X**

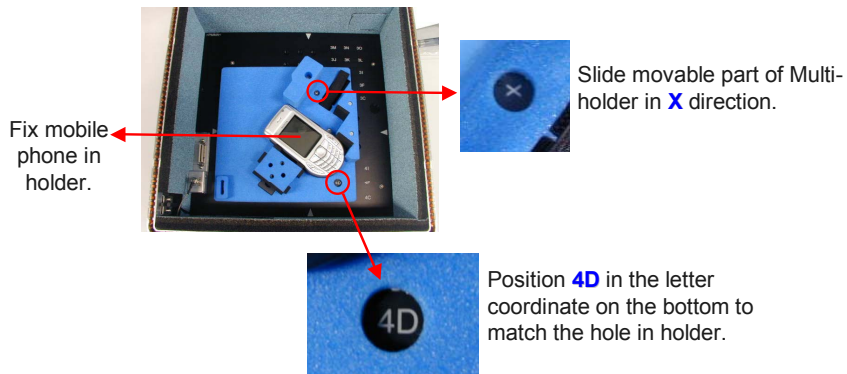


Discover What's Possible™  
MA8120E-E-L-2

Slide 6

Anritsu

## Ideal Air Connections

Users can choose from many placement positions to obtain the ideal air connection with fewer loss factors and stable measurement.

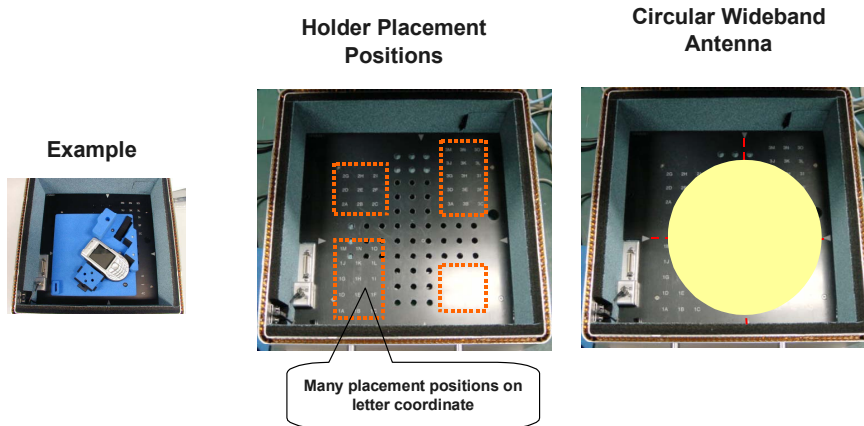


Discover What's Possible™  
MA8120E-E-L-2

Slide 7

Anritsu

## Integrated Wideband Antenna Supporting Major Communication Systems

The integrated wideband antenna (800 to 2500 MHz) simplifies operation by supporting W-CDMA, cdma2000, GSM, PDC, PHS, Wireless LAN, Bluetooth and GPS terminals using an air connection. Cable connection is also supported.

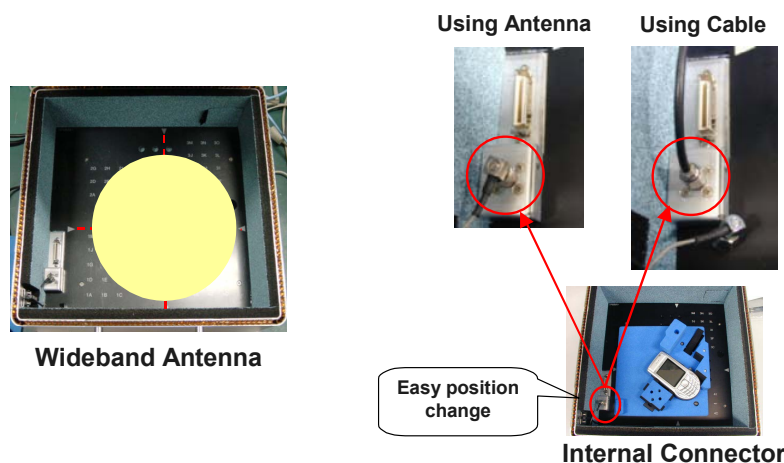


Discover What's Possible™  
MA8120E-E-L-2

Slide 8

Anritsu

## Feed-Through USB and RS-232C Control Lines

USB and RS-232C lines control the closed Shield Box while eliminating the effect of interference waveforms.

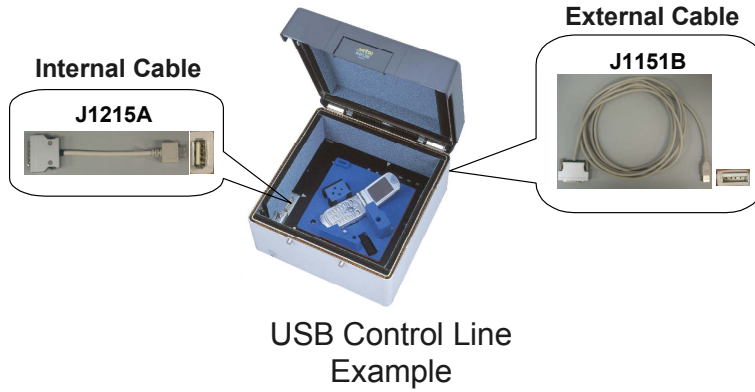

\*Order the J1215A and J1151B application cables or prepare your own.


Discover What's Possible™  
MA8120E-E-L-2

Slide 9

Anritsu

## Simple One-Handed Operation

The Shield Box is easily opened and closed with one hand to eliminate operator fatigue.

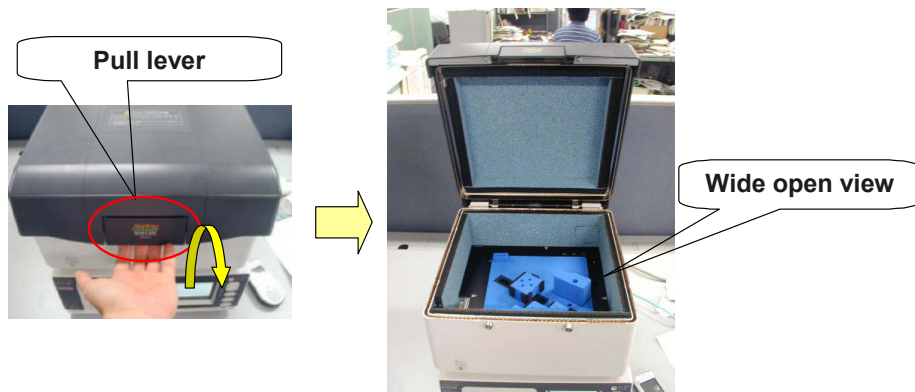

Discover What's Possible™  
MA8120E-E-L-2

Slide 10

Anritsu

## Large Capacity and No Protrusions

The large capacity easily accommodates large objects such as a cradle and DUT manual operation is easy because there are no protrusions.




Discover What's Possible™  
MA8120E-E-L-2

Slide 11

Anritsu

## Compatible with MT8510B Service Tester

The design allows the Shield Box to be stacked on the MT8510B.

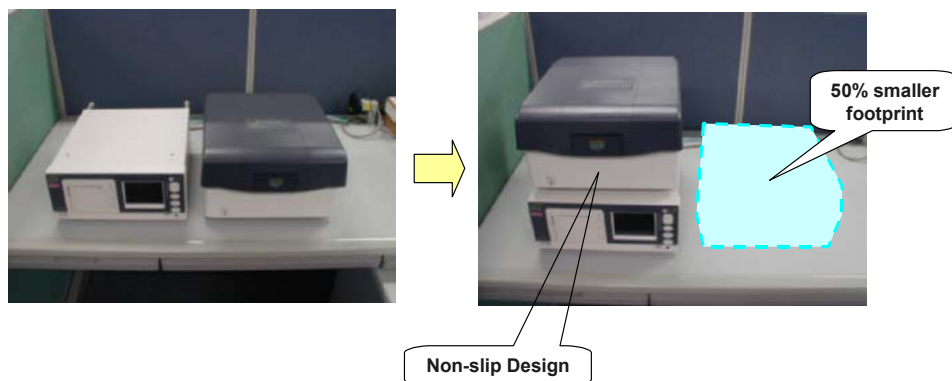

Discover What's Possible™  
MA8120E-E-L-2


Slide 12

Anritsu

## Appendix: Specifications

Frequency	800 to 2500 MHz	
Shield performance	≥ 60 dB	
Antenna coupling amount	≥ -25 dB	
Interface	External	RF connector: N type Control connector: DX50 type
	Internal	RF connector: SMA type Control connector: DX36 type
Dimensions and mass	Within 330.8 (W) x 181 (H) x 393 (D) mm (excluding protrusion) 7 kg or less	
Environment conditions	Temperature: 0 to +50°C (operating), -20 to +60°C (storage)	


## Appendix: MT8510B Configuration Example

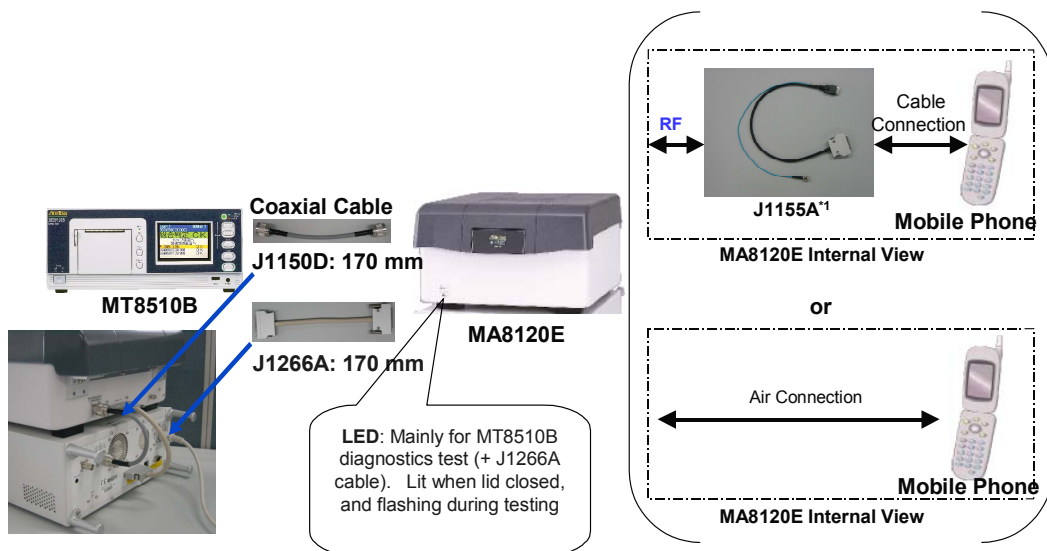

\*1: EIAJ-compliant cable



## Appendix: Application Test Configuration Example (1)

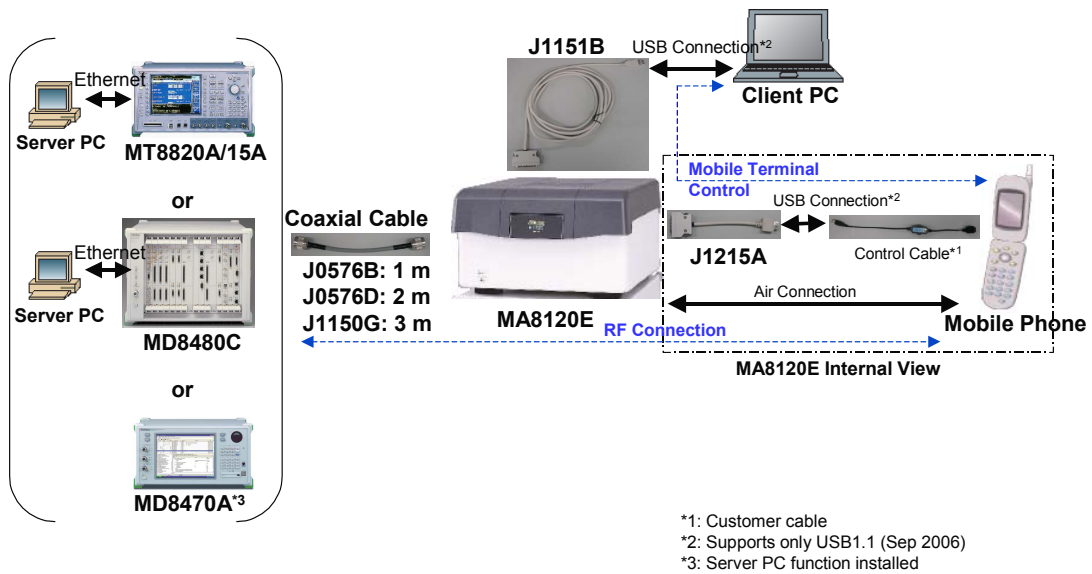


Discover What's Possible™  
 MA8120E-E-L-2

Slide 15

Anritsu

## Appendix: Application Test Configuration Example (2)

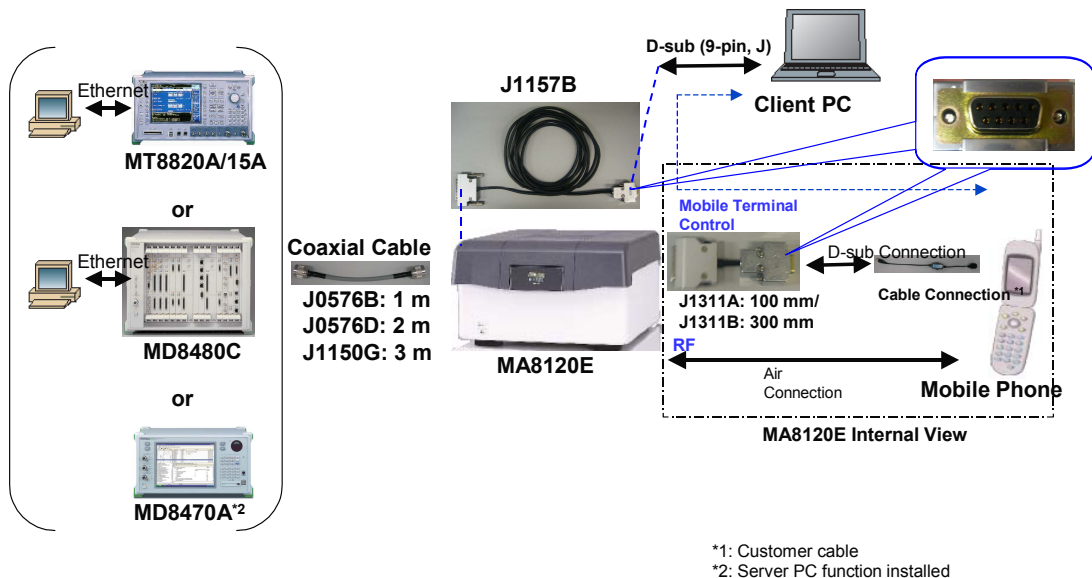

Discover What's Possible™  
 MA8120E-E-L-2

Slide 16

Anritsu

## Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan  
Phone: +81-46-223-1111  
Fax: +81-46-296-1264

## ● U.S.A.

### Anritsu Company

1155 East Collins Blvd., Richardson, TX 75081, U.S.A.  
Toll Free: 1-800-267-4878  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

## ● Canada

### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

## ● Brazil

### Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27 - 1 Andar  
01327-010-Paraiso-São Paulo-Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

## ● U.K.

### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

## ● France

### Anritsu S.A.

9 Avenue du Québec, Z.A. de Courtabœuf  
91951 Les Ulis Cedex, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

## ● Germany

### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

## ● Italy

### Anritsu S.p.A.

Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

## ● Sweden

### Anritsu AB

Borgafjordsgatan 13, 164 40 KISTA, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

## ● Finland

### Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

## ● Denmark

### Anritsu A/S

Kirkebjerg Allé 90, DK-2605 Brøndby, Denmark  
Phone: +45-72112200  
Fax: +45-72112210

## ● United Arab Emirates

### Anritsu EMEA Ltd.

#### Dubai Liaison Office

P O Box 500413 - Dubai Internet City  
Al Thuraya Building, Tower 1, Suit 701, 7th Floor  
Dubai, United Arab Emirates  
Phone: +971-4-3670352  
Fax: +971-4-3688460

## ● Singapore

### Anritsu Pte. Ltd.

10, Hoe Chiang Road, #07-01/02, Keppel Towers,  
Singapore 089315  
Phone: +65-6282-2400  
Fax: +65-6282-2533

## ● P.R. China (Hong Kong)

### Anritsu Company Ltd.

Suite 923, 9/F., Chinachem Golden Plaza, 77 Mody Road,  
Tsimshatsui East, Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

## ● P.R. China (Beijing)

### Anritsu Company Ltd.

#### Beijing Representative Office

Room 1515, Beijing Fortune Building,  
No. 5, Dong-San-Huan Bei Road,  
Chao-Yang District, Beijing 10004, P.R. China  
Phone: +86-10-6590-9230  
Fax: +86-10-6590-9235

## ● Korea

### Anritsu Corporation, Ltd.

8F Hyunjuk Building, 832-41, Yeoksam Dong,  
Kangnam-ku, Seoul, 135-080, Korea  
Phone: +82-2-553-6603  
Fax: +82-2-553-6604

## ● Australia

### Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,  
Victoria 3168, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

## ● Taiwan

### Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

## ● India

### Anritsu Corporation

#### India Liaison Office

Unit No. S-3, Second Floor, Esteem Red Cross Bhavan,  
No. 26, Race Course Road, Bangalore 560 001, India  
Phone: +91-80-32944707  
Fax: +91-80-22356648

Please Contact: