


# MW90010A

Coherent OTDR

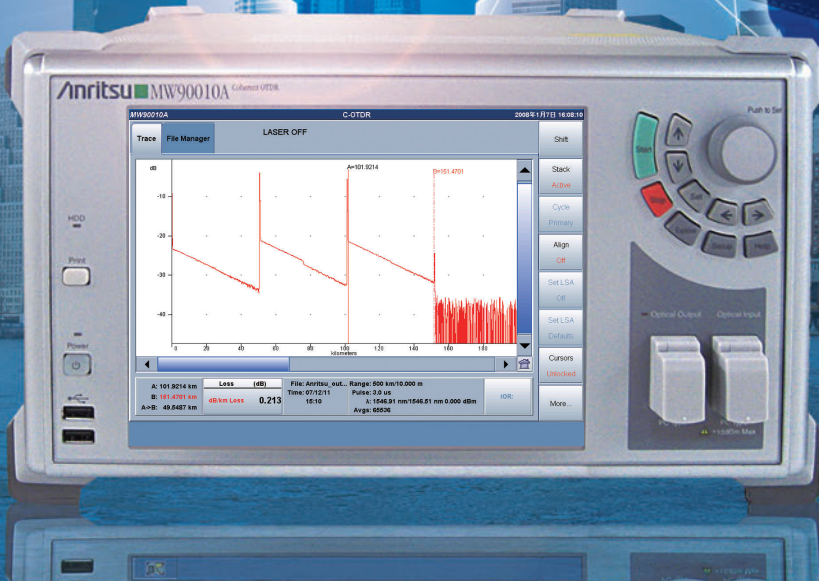

- **Measure submarine cables up to 12,000 km long with 10 m resolution**
- **Unique Solution for Submarine Links Fault Detection**
- **Compact & Lightweight for Easy Transportation.**
- **Easy Operation**
- **Wide Dynamic Range**


The Coherent OTDR (C-OTDR) MW90010A is a measuring instrument for detecting faults in ultra-long optical submarine cables of up to 12,000 km including multiple repeaters (EDFAs). It is the ideal solution for evaluating new cables at service deployment as well as for troubleshooting in-service faults.

Ultra-long optical submarine cables use optical amplifiers to boost signals. Successful OTDR measurement through the repeaters requires configuring a backscatter detection system using up and down links. The MW90010A can measure the backscatter light through all repeaters by using coherent detection. As a result, it can display every fault condition, such as optical loss between repeaters, bending loss, distances, breaks, etc., on-screen for waveform data analysis.


## Features

- Fault detection with 10 m distance resolution
- Compact and lightweight all-in-one design for on-site portability [320 (W) × 177 (H) × 451 (D) mm, 17 kg Max.]
- Simple and easy touch-panel operation for easy first-time use by any operator
- Wide dynamic range supporting fault detection and troubleshooting of submarine cables with repeaters at 80 km or wider intervals
- Built-in tunable light source with high wavelength accuracy of  $\pm 0.2$  nm for wavelength setting range of 1535.03 nm to 1565.08 nm
- Adjustable output power from 0 to +13 dBm


## External Appearance

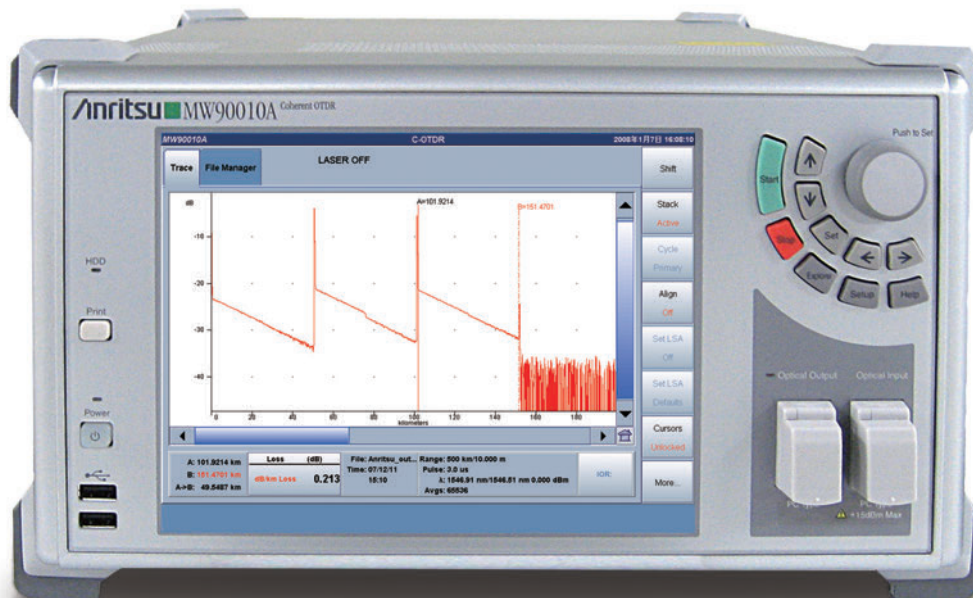

## Application

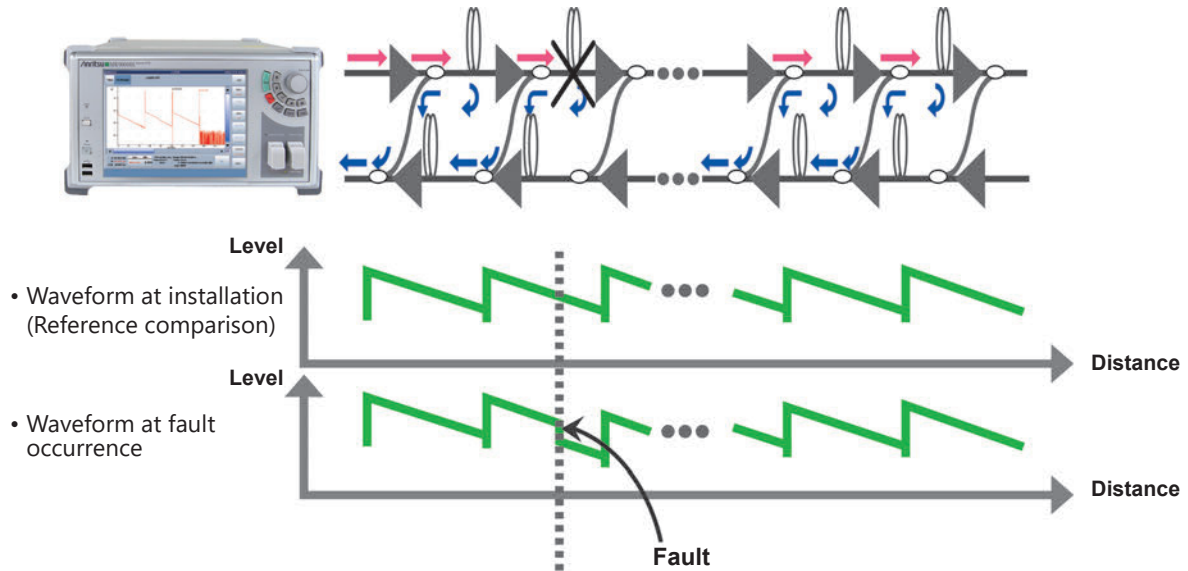

## C-OTDR Measurement Example

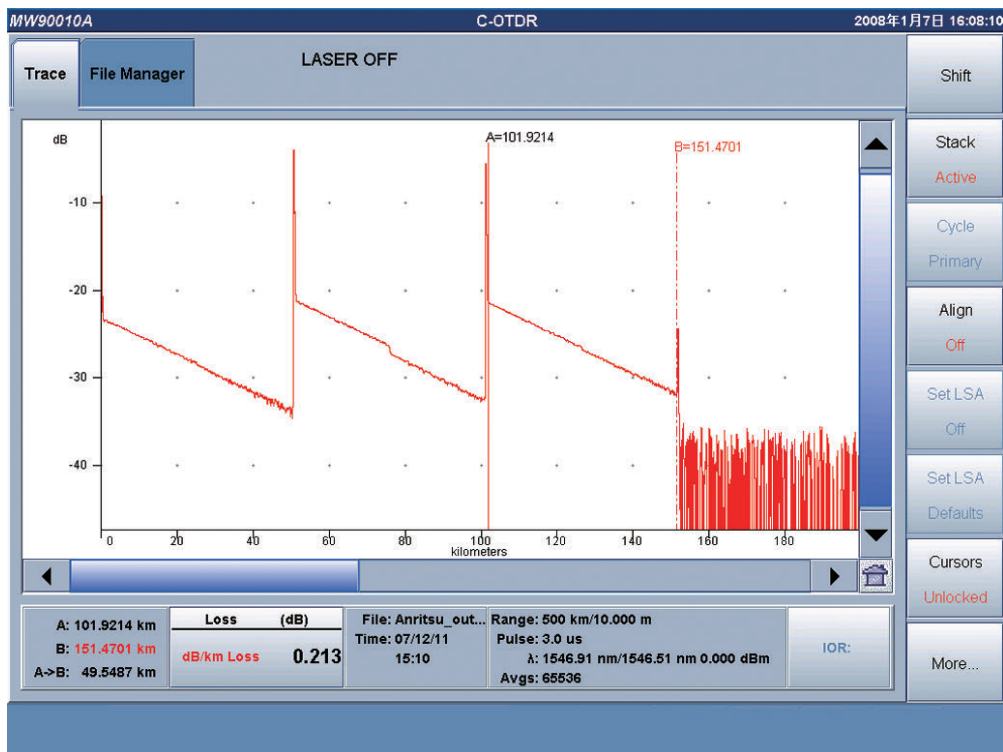

# The unsurpassed, compact, lightweight (17 kg max.), all-in-one design supports every stage of optical submarine cable management from cable installation to fault detection or past data analysis

- **Measure Submarine Cables up to 12,000 km Long with 10 m Resolution**


The MW90010A can capture data from up to 1.2 million points on the horizontal axis at a fixed resolution of 10 m with no dependency on measured distance. As a result, faults can be located with very high resolution even in fibers longer than 10,000 km.

- **Lightweight and Compact**

In comparison to previous optical submarine cable measuring equipment, the MW90010A is less than half the weight (17 kg max.) and size. The all-in-one design incorporates a tunable light source for easy on-site portability and troubleshooting.

- **Excellent GUI**

Every stage from setting parameters to starting measurement is made easy using the touch-screen. The rotary knob and keypad can be used for operation too. The easy-to-use design coupled with standard interfaces for USB memory, USB mouse, keyboard, and VGA OUT, makes measurement simple even for novice OTDR operators.

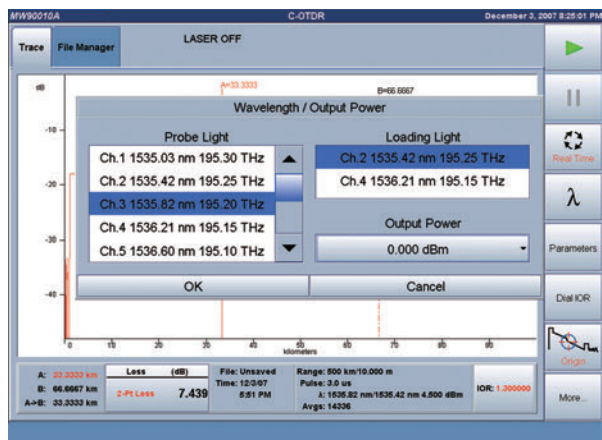


- **Wide Dynamic Range**

Typical optical submarine cables are designed with repeaters every 50 km to 60 km but the high resolution of the MW90010A easily supports fiber loss measurement of these systems as well as fault location of cables with repeaters spaced at more than 80 km.



- **Simultaneous Display of 8 Waveforms (max.)**

Installation and maintenance of optical submarine cables requires comparison of current waveform data with data at cable installation to monitor aging changes. The MW90010A makes this comparison easy because it can display up to 8 waveforms simultaneously, allowing faults to be seen at glance by comparing the install waveform with the fault waveform on one screen.

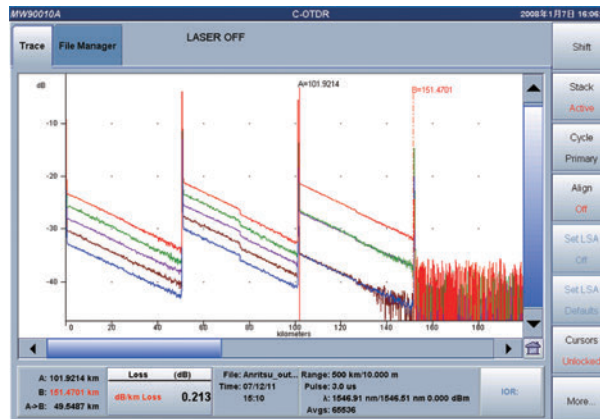


- **Built-in Standard OTDR Functions**

The MW90010A has the full range of versatile built-in applications, including real-time measurement, zoom/shift function, 2-point loss analysis, etc.

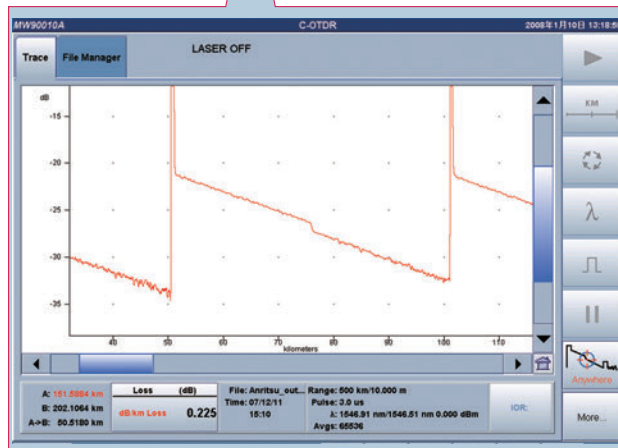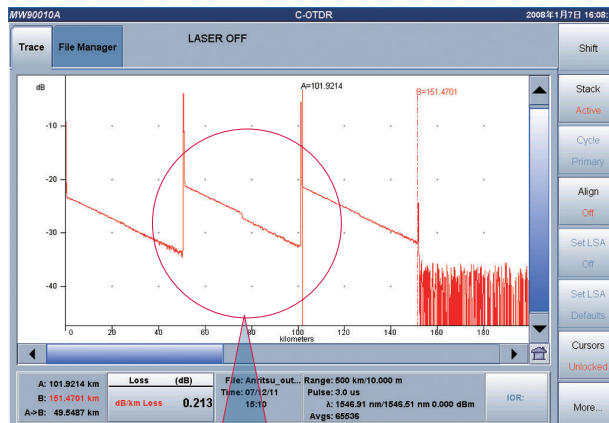

**• Remote Operation Function**

The MW90010A has a built-in VNC server. When the MW90010A (server) is connected over Ethernet to a PC (client) running either a Windows or Linux OS, the MW90010A GUI can be remotely controlled from the PC to transfer files between the server and client.

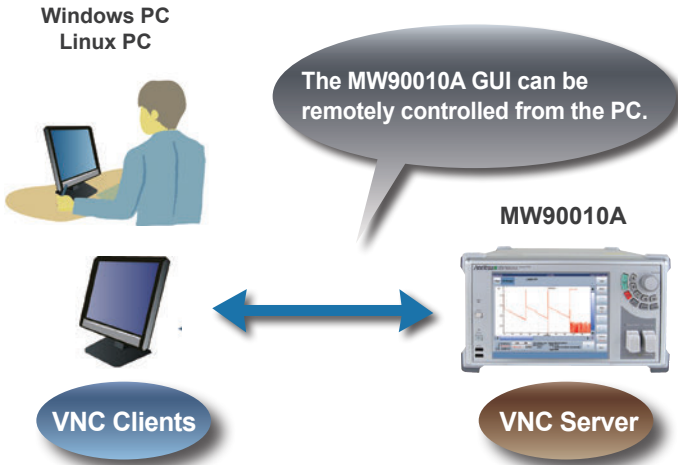


**• Additional Averaging Processing**

Evaluation of optical submarine communications cables using a C-OTDR can take many hours. However, measurement productivity is greatly increased using the MW90010A Additional Averaging function. For example, after waveform data has been measured for 2<sup>16</sup> averagings, the additional averaging function can be used to increase the measured data to 2<sup>17</sup> averagings.

**• Waveform Analysis using Emulation Software**

Waveform data measured and saved by the MW90010A can be analyzed on a PC running a Windows OS using the optional NETWORKS (version 4.1 or newer) emulation software (sold separately).

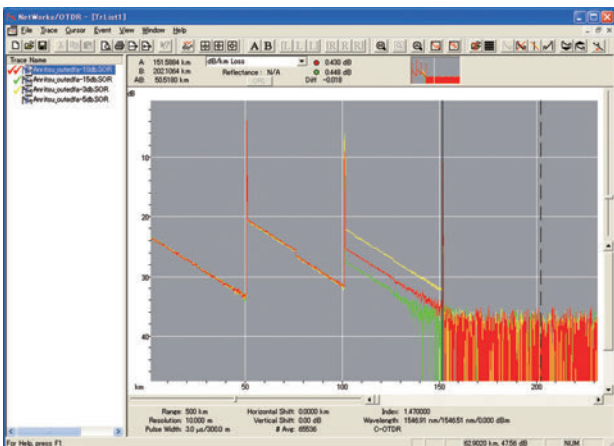

**• Support for Telcordia format (SR-4731)**


The Telcordia format shared by OTDR is supported.

**• 2.8-GB Internal Memory**

Measured data is saved in the 2.8-GB internal memory and can be copied to external USB memory stick for processing on a PC.

**• PDF-format Reports**

Measured data can be saved in PDF format for confirming measurement date, conditions, and waveform data on a single report.

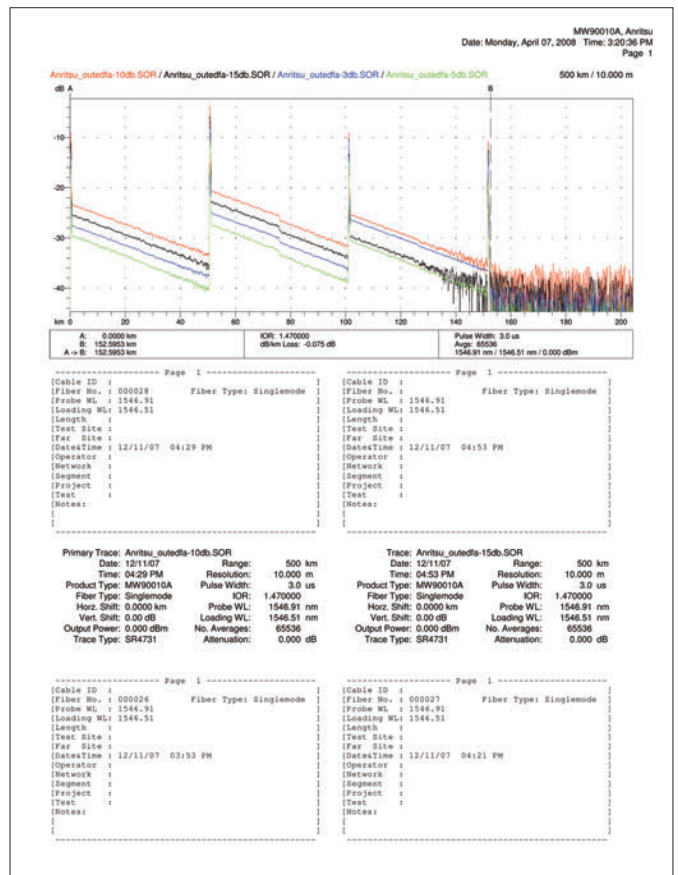


• Windows® is a registered trademark of Microsoft Corporation in the USA and other countries.

# Specifications

## MW90010A Coherent OTDR

Fiber Under Test	ITU-T G.653 (DSF)	
Optical Connector	FC, SC, DIN, HSM-10/A, ST (Replaceable, PC type)	
Wavelength (Probe Light)	1535.03 nm to 1565.08 nm (ITU-T Grid, Wavelength in vacuum setting with 50 GHz steps)	
Wavelength Accuracy	±0.2 nm (+20°C to +30°C)	
Warm-up Time	30 minutes (+20°C to +30°C)	
Loading Light Source (Dummy)	" wavelength of probe light " +50 GHz or -50 GHz The loading wavelength can be selectable at +50 GHz or -50 GHz of the probe (OTDR) wavelength.	
Pulse Width	3, 10, 30, 60, 100 μs	
Optical Output Power	0 to +13 dBm, 0.5 dB steps	
Dynamic Range (one way, S/N=1) (See the block diagram on previous page)	> 17 dB Measurement Conditions: Pulse width: 10 μs, Average times: 2 <sup>16</sup> , Distance range: 1000 km, Smoothing: On, Ps: -57 dBm @ Pin*1 Pase: -20 dBm/nm @ Pin*1	
Dead Zone	0.5 km (Pulse width: 3 μs)	
Distance Measurement Accuracy	±10 m ±0.5 × 10 <sup>-6</sup> × measurement value (m) This does not include optical fiber refraction index (IOR) based uncertainty.	
Vertical Scale	0.02, 0.05, 0.1, 0.2, 0.5, 1.0, 2.0, 5.0, 10.0 dB/div	
Distance Range	100 km, 500 km to 12,000 km (in 500 km steps)	
Sampling Resolution (IOR = 1.500000)	10 m	
Measurement Time	15 minutes (Distance range: 1000 km, Average times: 2 <sup>16</sup> )	
Average Times	2 <sup>8</sup> to 2 <sup>24</sup>	
Ior Settings	1.300000 to 1.700000 (0.000001 steps)	
Monitor Output	-25 to -15 dBm (for OTDR Wavelength Monitor)	
Other Functions	<ul style="list-style-type: none"> <li>• Real Time Measurement</li> <li>• Multiple Trace Display (8 Waveforms max.)</li> <li>• Zoom &amp; Shift</li> <li>• Loss Calculation               <ul style="list-style-type: none"> <li>Splice Loss, 2Pt Loss, 2Pt LSA, dB/ km Loss, dB/km LSA, 2Pt &amp; dB/km, 2Pt &amp; dB/km LSA</li> </ul> </li> <li>• File Save formats               <ul style="list-style-type: none"> <li>GR-196, SR4731</li> </ul> </li> <li>• USB Memory support</li> <li>• Internal Memory (2.8 GB)</li> <li>• Print               <ul style="list-style-type: none"> <li>External printer, Hard copy (file: PDF)</li> </ul> </li> <li>• Distance Unit               <ul style="list-style-type: none"> <li>miles, feet, kilofeet, meters, kilometers</li> </ul> </li> <li>• File Utility               <ul style="list-style-type: none"> <li>File: Copy, Paste, Delete</li> <li>Folder: Create new</li> </ul> </li> <li>• Help function</li> <li>• Remote Control Function (Option)</li> </ul>	
Display	8.4 inch, XGA (1024 × 768) color LCD with touch panel	
Interface	USB (2 ports, REV1.1), Mouse (USB), Keyboard (PS/2), VGA	
Power Supply	100 VAC to 120 VAC/200 VAC to 240 VAC, 50 Hz to 60 Hz, ≤300 VA	
Dimensions and Mass	320 (W) × 177 (H) × 451 (D) mm, <17 kg	
Environmental Conditions	Temperature: +10°C to +35°C (operating), -10°C to +50°C (storage) Humidity: <85% RH Vibration: Conforms to MIL-STD-810D	
CE	EMC	2014/30/EU, EN61326-1, EN61000-3-2
	LVD	2014/35/EU, EN61010-1
	RoHS	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
UKCA	EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2
	LVD	S.I. 2016 No.1101, EN 61010-1
	RoHS	S.I. 2012 No.3032, EN IEC 63000: 2018
Laser Safety Level*2	IEC 60825-1: 2007 CLASS 1M: Optical Output Port CLASS 1: Monitor Port 21CFR1040.10 Excludes deviations caused by conformance to Laser Notice No. 50 dated June 24, 2007	

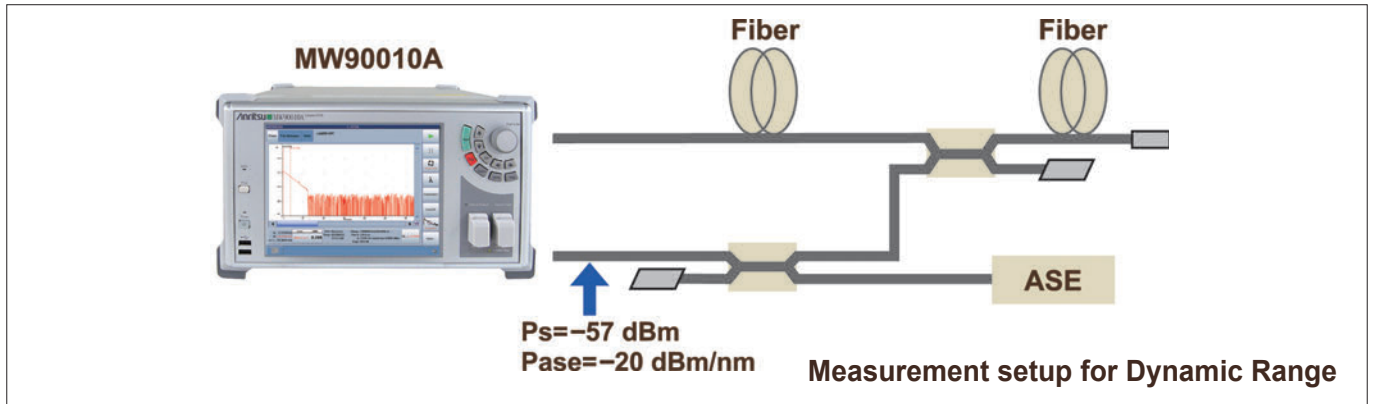

\*1: Ps: Maximum backscatter level at the input [dBm]

Pase: ASE level at the input [dBm]

\*2: Safety measures for laser products

This product complies with optical safety standards in 21CFR1040.10 and IEC 60825-1; the following descriptive labels are affixed to the product.



## Ordering Information

Please specify the model/order number, name and quantity when ordering.

The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

Model/Order No.	Name
MW90010A	<b>Main Frame</b> Coherent OTDR
	<b>Standard Accessories</b>
W3030AE	Power Cord: 1 pc MW90010A Operation Manual (CD-R): 1 copy
	<b>Options</b>
MW90010A-001	Remote Control Function
MW90010A-002*1	OS Upgrade to WES2009
MW90010A-101	Remote Control Function Retrofit
MW90010A-102*2	OS Upgrade to WES2009 Retrofit
	<b>Options (Optical Connector)</b>
MW90010A-037*3	FC Connector
MW90010A-038*3	ST Connector
MW90010A-039*3	DIN 47256 Connector
MW90010A-040*3	SC Connector
MW90010A-043*3	HMS-10/A Diamond Connector

\*1: Please be sure to specify.

\*2: Factory (in Japan) option.

\*3: Required option

Specify the optical connector type. The same type of connector will be supplied for the optical output port, optical input port, and optical monitor port.

\*4: Specify the optical fiber length as A, B or C (A: 1 m, B: 2 m, C: 3 m)

\*5: Monitor Output Port optical connector cap. Specify exchangeable optical connectors (J1409A, J1410A, J1411A, J1412A and J0617B) as a pair.

Model/Order No.	Name
	<b>Application Parts</b>
NETWORKS	Emulation Software (Version 4.1 or newer)
B0335C	Carrying Case
B0604A	Rack Mount Kit
J0617B	Replaceable Optical Connector (FC-PC)
J1409A	Replaceable Optical Connector (ST)
J1410A	Replaceable Optical Connector (DIN)
J1411A	Replaceable Optical Connector (SC)
J1412A	Replaceable Optical Connector (HMS-10/A)
J0057	Optical Adapter FC type
J0635*4	Optical Fiber Cord with FC-PC at both ends (SM, with FC-PC at both ends)
J0952A	FC · PC-FC · APC(SG)-1M-SM
Z0914A	Ferrule Cleaner
Z0915A	Replacement Reel for Ferrule Cleaner (6 pcs/set)
Z0284	Adapter Cleaner (Stick type, 200 pcs/set)
W3024AE	MW90010A Operation Manual (Printed version)
Z0397A*5	FC Adapter Cap
Z0412A*5	DIN Adapter Cap
Z0413A*5	SC Adapter Cap
Z0414A*5	HMS-10 Adapter Cap

## Network Master Pro MT1000A



### 10G Multirate Module 100G Multirate Module

Installing the MU100010A or MU100011A in the MT1000A supports commissioning and maintenance tests of communications networks operating at speeds from 1.5 Mbps to 100 Gbps. In addition to Ethernet, OTN, eCPRI/RoE/CPRI/OBSAI, Fibre Channel and SyncE protocols used by mobile-network base stations are supported too.

### OTDR Module 1310/1550 nm SMF OTDR Module 1310/1550/850/1300 nm SMF/MMF OTDR Module 1310/1550/1625 nm SMF OTDR Module 1310/1550/1650 nm SMF

### MU100010A MU100011A

### MU100020A MU100021A MU100022A MU100023A

Installing an OTDR Module MU100020A/MU100021A/MU100022A/MU100023A provides the OTDR functions required for optical fiber I&M. Work efficiency is increased by all-in-one support for optical fiber tests and data communications network commissioning. I&M tests of 1.5 Mbps to 100 Gbps communications networks can be executed by simultaneously installing the MU100010A or MU100011A. In addition to supporting Ethernet, OTN, etc., networks, Mobile base station CPRI and OBSAI, as well as SyncE protocols are also supported.



## MT9090 Series



### μOTDR Module MU909014/15

Compact OTDR for full automatic verification of optical networks, FTTH-PON, Metro and Core.



### Gigabit Ethernet Module MU909060A

Dedicated field test solution for installation and troubleshooting Ethernet links in access networks.



## CMA5 Series

For Optical Fiber Installation and Maintenance.



## ACCESS Master MT9085 Series

### For WAN/MFH/DCI/FTTH Optical Fiber I&M

- Improved operability with powerful synergy of 8-inch touchscreen and hardware keys
- At-a-glance Pass/Fail evaluation using Fiber Visualizer
- All OTDR, OLTS, and Visible Light Source operations on one screen
- Short event dead zone of  $\leq 0.8$  m and high dynamic range of 46 dB max.
- Power meter option for measuring optical power up to +30 dBm



# Anritsu

 Advancing beyond

Specifications are subject to change without notice.

#### • United States

##### Anritsu Americas Sales Company

450 Century Parkway, Suite 190, Allen, TX 75013 U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

#### • Canada

##### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

#### • Brazil

##### Anritsu Eletronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP, Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

#### • Mexico

##### Anritsu Company, S.A. de C.V.

Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +52-55-4169-7104

#### • United Kingdom

##### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

#### • France

##### Anritsu S.A.

12 avenue du Québec, Immeuble Goyave,  
81140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50

#### • Germany

##### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1,  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

#### • Italy

##### Anritsu S.r.l.

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy  
Phone: +39-6-509-9711

#### • Sweden

##### Anritsu AB

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00

#### • Finland

##### Anritsu AB

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100

#### • Denmark

##### Anritsu A/S

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

#### • Russia

##### Anritsu EMEA Ltd.

##### Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor., Moscow, 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

#### • Spain

##### Anritsu EMEA Ltd.

##### Representation Office in Spain

Paseo de la Castellana, 141. Planta 5, Edificio Cuzco IV  
28046, Madrid, Spain  
Phone: +34-91-572-6761

#### • Austria

##### Anritsu EMEA GmbH

Am Belvedere 10, A-1100 Vienna, Austria  
Phone: +43-(0)1-717-28-710

#### • United Arab Emirates

##### Anritsu EMEA Ltd.

##### Anritsu A/S

Office No. 164, Building 17, Dubai Internet City  
P. O. Box - 501901, Dubai, United Arab Emirates  
Phone: +971-4-3758479

#### • India

##### Anritsu India Private Limited

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road, Bengaluru - 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

#### • Singapore

##### Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shiro House, Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

#### • Vietnam

##### Anritsu Company Limited

16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,  
Dong Da District, Hanoi, Vietnam  
Phone: +84-24-3201-2730

#### • P.R. China (Shanghai)

##### Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A, New Caohejing International  
Business Center No. 391 Gui Ping Road Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

#### • P.R. China (Hong Kong)

##### Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

#### • Japan

##### Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

#### • Korea

##### Anritsu Corporation, Ltd.

5FL, 235 Pangyoeyeok-ro, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13494 Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

#### • Australia

##### Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

#### • Taiwan

##### Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817